

W-Band Fixed Attenuator, 6 dB

Description:

Model STA-06-10-F2 is a 6 dB fixed attenuator that is used in millimeterwave systems and operates from 75 to 110 GHz. The attenuator has a fixed attenuation value of 6 dB at center frequency, 92.5 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.



Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	75 GHz		110 GHz
Attenuation @ 92.5 GHz		6.0 dB	
VSWR		1.2:1	1.3:1
Power Handling		500 mW	750 mW
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
RF Input	WR-10 Waveguide with UG-387/U-M Flange
RF Output	WR-10 Waveguide with UG-387/U-M Flange
Setting	Fixed
Insertion Length	2.50"
Finish	Gold Plated Waveguide Faces; Black Painted Body
Weight	1.3 Oz
Outline	TA-FW-BX1




W-Band Fixed Attenuator, 6 dB

Typical Attenuation vs. Frequency

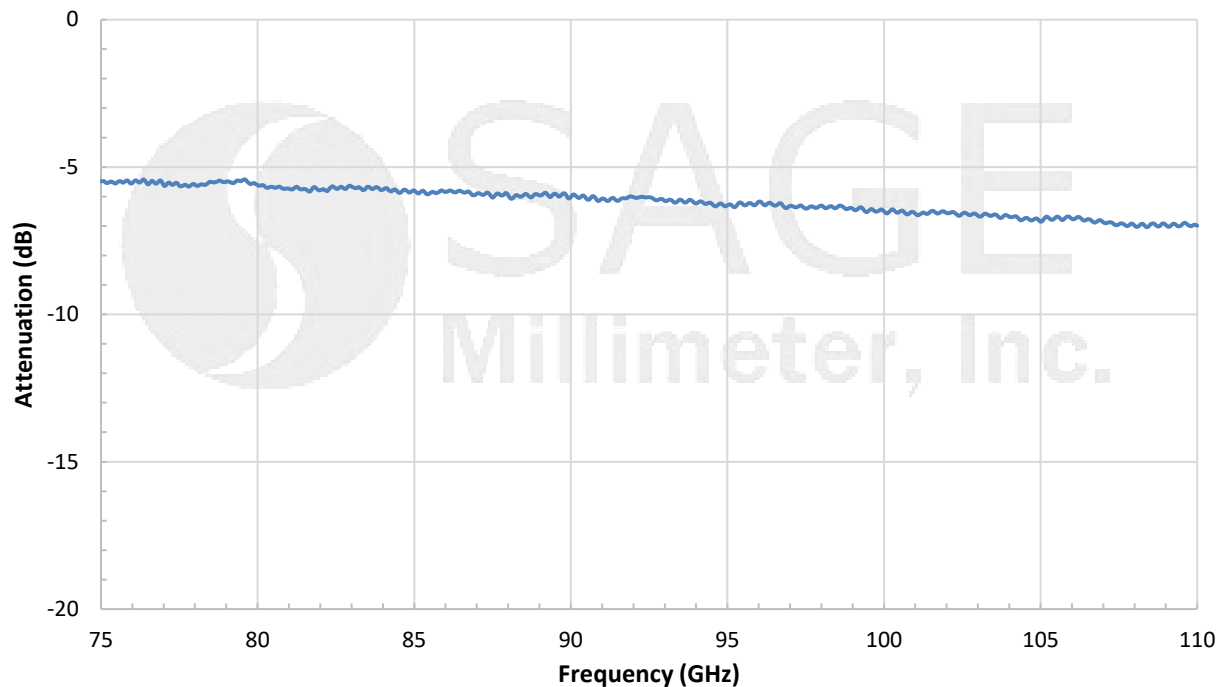


Typical Return Loss vs. Frequency

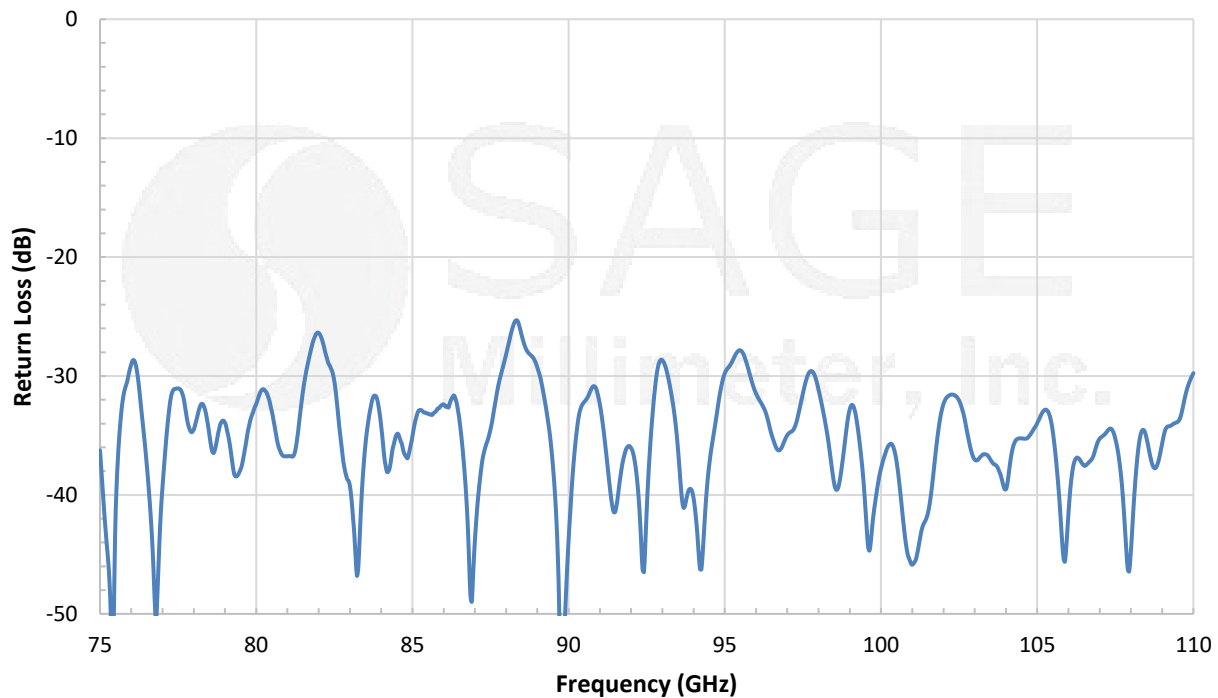

W-Band Fixed Attenuator, 6 dB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

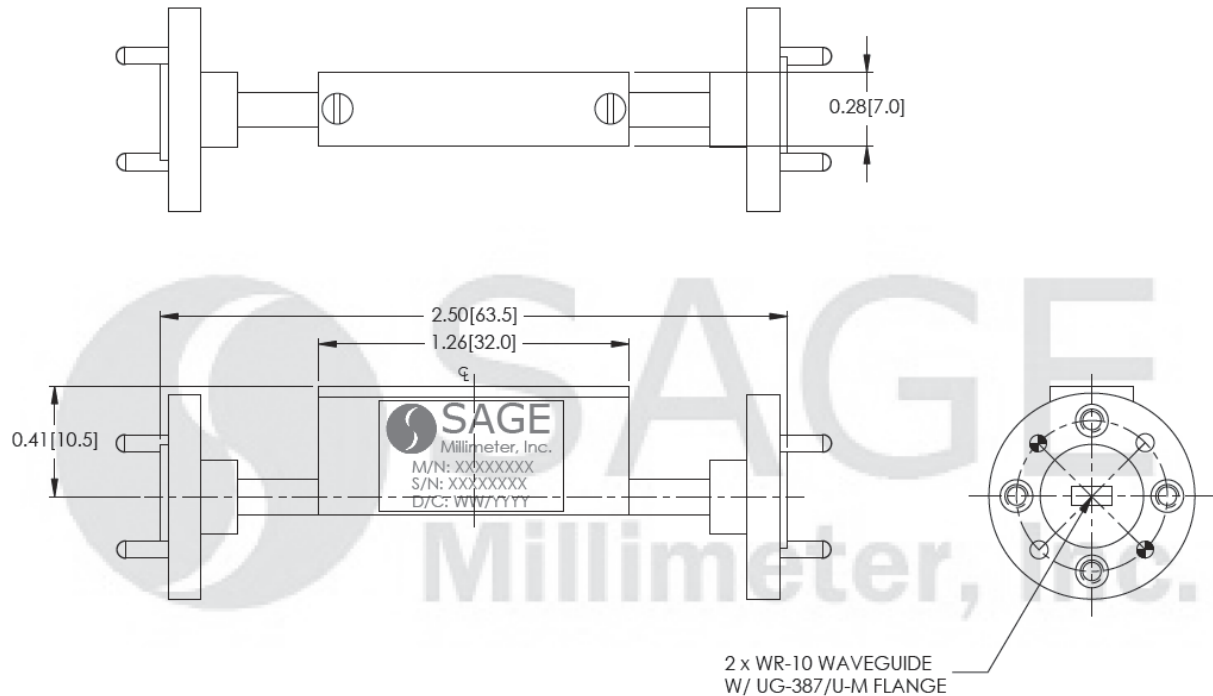

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- RF power should never exceed 300 mW.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.