ADC34J2x 具有 JESD204B 接口的四通道 12 位 50MSPS 至 160MSPS 模数转换器

1 特性

- 四通道
- 12 位分辨率
- 1.8V 单电源
- 支持 1 分频，2 分频和 4 分频的灵活输入时钟缓冲器
- f_{IN} = 70MHz 时，信噪比 (SNR) = 69.6dBFS，无杂散动态范围 (SFDR) = 86dBc
- 超低功耗：
  - 160MSPS 时为每通道 203mW
- 通道隔离：105dB
- 内部抖动
- JESD204B 串口：
  - 兼容子类 0、1、2，速率最高达 3.2Gbps
  - 支持每个 ADC 一条通道（高达 160MSPS）
- 支持多芯片同步
- 与 14 位版本器件引脚到引脚兼容
- 封装：超薄四方扁平无引线 (VQFN)-48 (7mm x 7mm)

2 应用

- 多载波、多模式蜂窝基站
- 雷达和智能天线阵列
- 炮弹制导
- 电机控制反馈
- 网络和矢量分析器
- 通信测试设备
- 无损检测
- 微波接收器
- 软件定义无线电 (SDR)
- 正交和分集无线电接收器

3 说明

ADC34J2x 属于高线性度、超低功耗、双通道、12 位、50MSPS 至 160MSPS 模数转换器 (ADC) 系列。此类器件专门设计用于支持具有宽动态范围需求且要求苛刻的高输入频率信号。 当 SYSREF 输入实现整个系统同步时，时钟输入分频器将给予系统时钟架构设计更高的灵活性。 该器件支持 JESD204B 接口，从而减少接口线路的数量，实现高系统集成度。 JESD204B 接口是串行接口，仅通过一个差分对即可串行输出每个 ADC 的数据。 内部锁相环 (PLL) 会将传入的 ADC 采样时钟乘以 20，以获得串行输出各通道的 12 位数据时所使用的位时钟。 该器件支持子类 1，接口速率高达 3.2Gbps。

器件信息(1)

器件型号	封装	采样速率 (MSPS)
ADC34J22	VQFN (48)	50
ADC34J23		80
ADC34J24		125
ADC34J25		160

(1) 如需了解所有可用封装，请见数据表末尾的可订购产品附录。

启用抖动功能时的快速傅立叶变换 (FFT)（f_S = 160MSPS，f_{IN} = 10MHz，SNR = 70.3dBFS，SFDR = 84dBc）

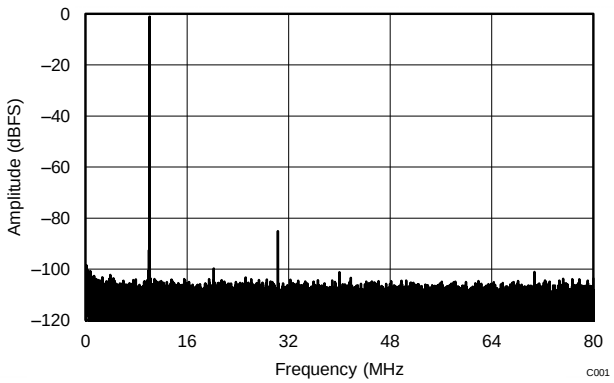

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

目录

1 特性 ... 1
2 应用 ... 1
3 说明 ... 1
4 修订历史记录 ... 2
5 **Device Comparison Table** ... 3
6 **Pin Configuration and Functions** ... 3
7 **Specifications** ... 5
7.1 Absolute Maximum Ratings ... 5
7.2 ESD Ratings ... 5
7.3 Recommended Operating Conditions ... 5
7.4 Summary of Special Mode Registers ... 6
7.5 Thermal Information ... 6
7.6 Electrical Characteristics: ADC34J24, ADC34J25 ... 7
7.7 Electrical Characteristics: ADC34J22, ADC34J23 ... 7
7.8 Electrical Characteristics: General ... 8
7.9 AC Performance: ADC34J25 ... 9
7.10 AC Performance: ADC34J24 ... 11
7.11 AC Performance: ADC34J23 ... 13
7.12 AC Performance: ADC34J22 ... 15
7.13 Digital Characteristics ... 16
7.14 Timing Characteristics ... 17
7.15 Typical Characteristics: ADC34J25 ... 18
7.16 Typical Characteristics: ADC34J24 ... 24
7.17 Typical Characteristics: ADC34J23 ... 30
7.18 Typical Characteristics: ADC34J22 ... 36
7.19 Typical Characteristics: Common Plots ... 42
7.20 Typical Characteristics: Contour Plots ... 43
8 **Parameter Measurement Information** ... 45
8.1 Timing Diagrams ... 45
9 **Detailed Description** ... 47
9.1 Overview ... 47
9.2 Functional Block Diagram ... 47
9.3 Feature Description ... 48
9.4 Device Functional Modes ... 55
9.5 Programming ... 55
9.6 Register Map ... 59
10 **Application and Implementation** ... 75
10.1 Application Information ... 75
10.2 Typical Applications ... 75
11 **Power-Supply Recommendations** ... 78
12 **Layout** ... 79
12.1 Layout Guidelines ... 79
12.2 Layout Example ... 79
13 器件和文档支持 ... 80
13.1 相关链接 ... 80
13.2 商标 ... 80
13.3 静电放电警告 ... 80
13.4 术语表 ... 80
14 机械封装和可订购信息 ... 80

4 修订历史记录

Changes from Original (May 2014) to Revision A **Page**

- 已将文档状态从产品预览更改为量产数据 ... 1

Copyright © 2014–2015, Texas Instruments Incorporated

5 Device Comparison Table

INTERFACE	RESOLUTION (Bits)	25 MSPS	50 MSPS	80 MSPS	125 MSPS	160 MSPS
Serial LVDS	12	ADC3421	ADC3422	ADC3423	ADC3424	—
	14	ADC3441	ADC3442	ADC3443	ADC3444	—
JESD204B	12	—	ADC34J22	ADC34J23	ADC34J24	ADC34J25
	14	—	ADC34J42	ADC34J43	ADC34J44	ADC34J45

6 Pin Configuration and Functions

RGZ Package
VQFN-48
(Top View)

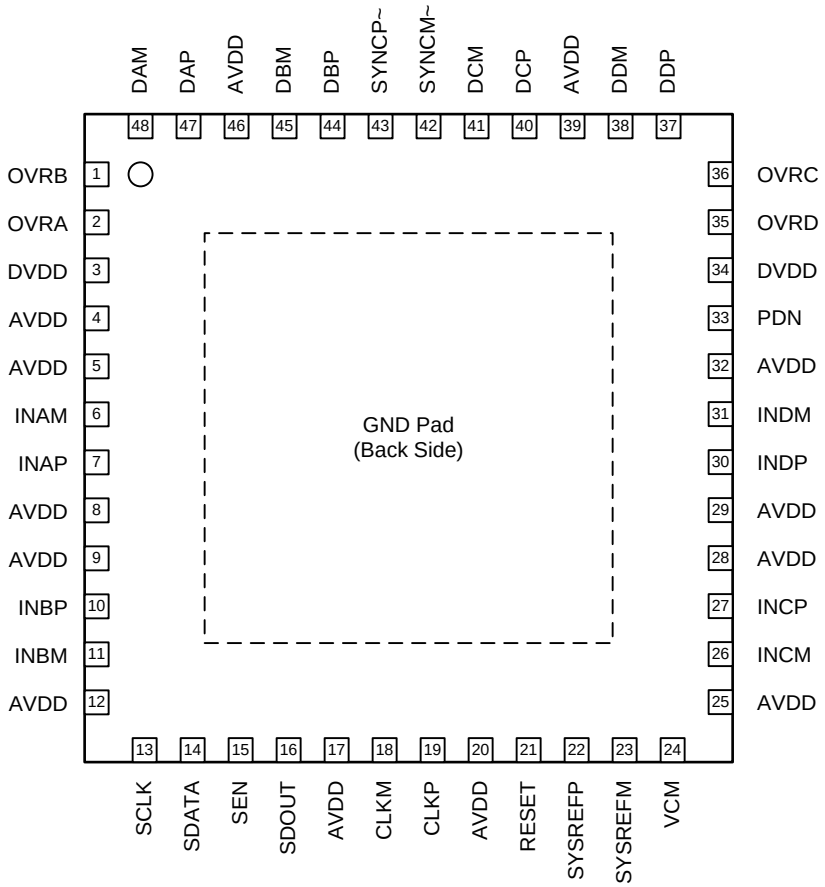

Copyright © 2014–2015, Texas Instruments Incorporated

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
AVDD	4, 5, 8, 9, 12, 17, 20, 25, 28, 29, 32, 39, 46	I	Analog 1.8-V power supply
CLKM	18	I	Negative differential clock input for the ADC
CLKP	19	I	Positive differential clock input for the ADC
DAM	48	O	Negative serial JESD204B output for channel A
DAP	47	O	Positive serial JESD204B output for channel A
DBM	45	O	Negative serial JESD204B output for channel B
DBP	44	O	Positive serial JESD204B output for channel B
DCM	41	O	Negative serial JESD204B output for channel C
DCP	40	O	Positive serial JESD204B output for channel C
DDM	38	O	Negative serial JESD204B output for channel D
DDP	37	O	Positive serial JESD204B output for channel D
DVDD	3, 34	I	Digital 1.8-V power supply
GND	PowerPAD™	I	Ground, 0 V
INAM	6	I	Negative differential analog input for channel A
INAP	7	I	Positive differential analog input for channel A
INBM	11	I	Negative differential analog input for channel B
INBP	10	I	Positive differential analog input for channel B
INCM	26	I	Negative differential analog input for channel C
INCP	27	I	Positive differential analog input for channel C
INDM	31	I	Negative differential analog input for channel D
INDP	30	I	Positive differential analog input for channel D
OVRA	2	O	Overrange indicator for channel A
OVRB	1	O	Overrange indicator for channel B
OVRC	36	O	Overrange indicator for channel C
OVRD	35	O	Overrange indicator for channel D
PDN	33	I	Power-down control. This pin has an internal 150-kΩ pull-down resistor.
RESET	21	I	Hardware reset; active high. This pin has an internal 150-kΩ, pull-down resistor.
SCLK	13	I	Serial interface clock input. This pin has an internal 150-kΩ pull-down resistor.
SDATA	14	I	Serial interface data input. This pin has an internal 150-kΩ pull-down resistor.
SDOUT	16	O	Serial interface data output
SEN	15	I	Serial interface enable. Active low. This pin has an internal 150-kΩ pull-up resistor to AVDD.
SYNCM~	42	I	Negative JESD204B synch input
SYNCP~	43	I	Positive JESD204B synch input
SYSREFM	23	I	Negative external SYSREF input
SYSREFP	22	I	Positive external SYSREF input
VCM	24	O	Common-mode voltage output for the analog inputs

Copyright © 2014–2015, Texas Instruments Incorporated

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Supply voltage range, AVDD		–0.3	2.1	V
Supply voltage range, DVDD		–0.3	2.1	V
Voltage applied to input pins:	INAP, INBP, INCP, INDP, INAM, INBM, INCM, INDM	–0.3	Minimum (AVDD + 0.3, 2.1)	V
	CLKP, CLKM (2)	–0.3	Minimum (AVDD + 0.3, 2.1)	V
	SYSREFP, SYSREFM, SYNCP~, SYNCM~	–0.3	Minimum (AVDD + 0.3, 2.1)	V
	SCLK, SEN, SDATA, RESET, PDN	–0.3	3.6	V
Temperature	Operating free-air, T_A	–40	85	°C
	Operating junction, T_J		125	°C
	Storage, T_{stg}	–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) When AVDD is turned off, TI recommends switching off the input clock (or ensuring the voltage on CLKP, CLKM is less than |0.3 V|). This configuration prevents the ESD protection diodes at the clock input pins from turning on.

7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2000	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions (1)

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
SUPPLIES						
AVDD	Analog supply voltage range		1.7	1.8	1.9	V
DVDD	Digital supply voltage range		1.7	1.8	1.9	V
ANALOG INPUT						
V_{ID}	Differential input voltage	For input frequencies < 450 MHz		2		V_{PP}
		For input frequencies < 600 MHz		1		V_{PP}
V_{IC}	Input common-mode voltage			VCM ± 0.025		V
CLOCK INPUT						
	Input clock frequency	Sampling clock frequency	25		160 (2)	MSPS
	Input clock amplitude (differential)	Sine wave, ac-coupled	0.2	1.5		V
		LPECL, ac-coupled		1.6		V
		LVDS, ac-coupled		0.7		V
	Input clock duty cycle		35	50	65	%
	Input clock common-mode voltage			0.95		V
DIGITAL OUTPUTS						
C_{LOAD}	Maximum external load capacitance from each output pin to GND			3.3		pF
R_{LOAD}	Single-ended load resistance			100		Ω

(1) After power-up, to reset the device for the first time, only use the RESET pin; see the Register Initialization section.
(2) With the clock divider enabled by default for divide-by-1. Maximum sampling clock frequency for the divide-by-4 option is 640 MSPS.

Copyright © 2014–2015, Texas Instruments Incorporated

7.4 Summary of Special Mode Registers

Table 1 lists the location, value, and functions of special mode registers in the device.

Table 1. Special Modes Summary

MODE		LOCATION	VALUE AND FUNCTION
Dither mode	DIS DITH CHA	01h [7:6], 134h[5,3]	Creates a noise floor cleaner and improves SFDR; see the *Internal Dither Algorithm* section. 0000 = Dither disabled 1111 = Dither enabled
	DIS DITH CHB	01h [5:4], 434h[5,3]	
	DIS DITH CHC	01h [3:2], 534h[5,3]	
	DIS DITH CHD	01h [1:0], 234h[5,3]	
Special mode 1	SPECIAL MODE 1 CHA	06h[4:2]	Use for better HD3. 000 = Default after reset 010 = Use for frequency < 120 MHz 111 = Use for frequency > 120 MHz
	SPECIAL MODE 1 CHB	07h[4:2]	
	SPECIAL MODE 1 CHC	08h[4:2]	
	SPECIAL MODE 1 CHD	09h[4:2]	
Special mode 2	SPECIAL MODE 2 CHA	122h[1:0]	Helps improve HD2. 00 = Default after reset 11 = Improves HD2
	SPECIAL MODE 2 CHB	422h[1:0]	
	SPECIAL MODE 2 CHC	522h[1:0]	
	SPECIAL MODE 2 CHD	222h[1:0]	

7.5 Thermal Information

THERMAL METRIC(1)		ADC34J2x RGZ (VQFN) 48 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	25.7	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	18.9	
$R_{\theta JB}$	Junction-to-board thermal resistance	3.0	
ψ_{JT}	Junction-to-top characterization parameter	0.2	
ψ_{JB}	Junction-to-board characterization parameter	3	
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	0.5	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2014–2015, Texas Instruments Incorporated

7.6 Electrical Characteristics: ADC34J24, ADC34J25

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, maximum sampling rate, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER	ADC34J24			ADC34J25			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	
ADC clock frequency			125			160	MSPS
Resolution	12			12			Bits
1.8-V analog supply (AVDD) current		318	490		354	490	mA
1.8-V digital supply current		79	150		97	150	mA
Total power dissipation		715	1010		812	1010	mW
Global power-down dissipation		22			22		mW
Wake-up time from global power-down		85	100		85	100	µs
Standby power-down dissipation		177			185		mW
Wake-up time from standby power-down		35	300		35	300	µs

7.7 Electrical Characteristics: ADC34J22, ADC34J23

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, maximum sampling rate, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER	ADC34J22			ADC34J23			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	
ADC clock frequency			50			80	MSPS
Resolution	12			12			Bits
1.8-V analog supply current		233	490		269	490	mA
1.8-V digital supply current		39	150		56	150	mA
Total power dissipation		491	1010		584	1010	mW
Global power-down dissipation		22			22		mW
Wake-up time from global power-down		85	100		85	100	µs
Standby power-down dissipation		155			166		mW
Wake-up time from standby power-down		35	300		35	300	µs

Copyright © 2014–2015, Texas Instruments Incorporated

7.8 Electrical Characteristics: General

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, Maximum sampling rate, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
ANALOG INPUT							
	Differential input full-scale				2.0		V_{PP}
r_i	Input resistance	Differential at dc			6.5		kΩ
c_i	Input capacitance	Differential at dc			5.2		pF
$V_{OC(VCM)}$	VCM common-mode voltage output				0.95		V
	VCM output current capability				10		mA
	Input common-mode current	Per analog input pin			1.5		µA/MSPS
	Analog input bandwidth (3 dB)	50-Ω differential source driving 50-Ω termination across INP and INM			450		MHz
DC ACCURACY							
E_O	Offset error			–20		20	mV
$E_{G(REF)}$	Gain error as a result of internal reference inaccuracy alone			–3		3	%FS
$E_{G(CHAN)}$	Gain error of channel alone				±1		%FS
CHANNEL-TO-CHANNEL ISOLATION							
	Crosstalk(1)	f_{IN} = 10 MHz	Near channel		105		dB
			Far channel		105		dB
		f_{IN} = 100 MHz	Near channel		95		dB
			Far channel		105		dB
		f_{IN} = 200 MHz	Near channel		94		dB
			Far channel		105		dB
		f_{IN} = 230 MHz	Near channel		93		dB
			Far channel		105		dB
		f_{IN} = 300 MHz	Near channel		85		dB
			Far channel		105		dB

(1) Crosstalk is measured with a –1-dBFS input signal on aggressor channel and no input on victim channel.

Copyright © 2014–2015, Texas Instruments Incorporated

7.9 AC Performance: ADC34J25

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J25 (f_S = 160 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio	f_{IN} = 10 MHz		70.2			70.4		dBFS
		f_{IN} = 70 MHz	68.5	69.6			69.9		
		f_{IN} = 100 MHz		69.3			69.6		
		f_{IN} = 170 MHz		68.4			68.9		
		f_{IN} = 230 MHz		67.5			68.1		
NSD	Noise spectral density (averaged across Nyquist zone)	f_{IN} = 10 MHz		149.2			149.4		dBFS/Hz
		f_{IN} = 70 MHz	147.5	148.6			148.9		
		f_{IN} = 100 MHz		148.3			148.6		
		f_{IN} = 170 MHz		147.4			147.9		
		f_{IN} = 230 MHz		146.5			147.1		
SINAD	Signal-to-noise and distortion ratio	f_{IN} = 10 MHz		70.1			70.3		dBFS
		f_{IN} = 70 MHz	67.6	69.5			69.7		
		f_{IN} = 100 MHz		69.2			69.4		
		f_{IN} = 170 MHz		68.2			68.6		
		f_{IN} = 230 MHz		67.2			67.5		
ENOB	Effective number of bits	f_{IN} = 10 MHz		11.4			11.4		Bits
		f_{IN} = 70 MHz	10.9	11.3			11.3		
		f_{IN} = 100 MHz		11.2			11.3		
		f_{IN} = 170 MHz		11.1			11.1		
		f_{IN} = 230 MHz		10.9			10.9		
SFDR	Spurious-free dynamic range	f_{IN} = 10 MHz		85			86		dBc
		f_{IN} = 70 MHz	81	86			85		
		f_{IN} = 100 MHz		86			87		
		f_{IN} = 170 MHz		85			84		
		f_{IN} = 230 MHz		81			80		
HD2	Second harmonic distortion	f_{IN} = 10 MHz		91			92		dBc
		f_{IN} = 70 MHz	81	94			93		
		f_{IN} = 100 MHz		93			91		
		f_{IN} = 170 MHz		83			83		
		f_{IN} = 230 MHz		81			79		
HD3	Third harmonic distortion	f_{IN} = 10 MHz		85			86		dBc
		f_{IN} = 70 MHz	81	85			85		
		f_{IN} = 100 MHz		86			87		
		f_{IN} = 170 MHz		93			87		
		f_{IN} = 230 MHz		85			82		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f_{IN} = 10 MHz		98			94		dBc
		f_{IN} = 70 MHz	87	97			94		
		f_{IN} = 100 MHz		96			93		
		f_{IN} = 170 MHz		92			92		
		f_{IN} = 230 MHz		90			89		

Copyright © 2014–2015, Texas Instruments Incorporated

AC Performance: ADC34J25 (continued)

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J25 (f_S = 160 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
THD	Total harmonic distortion	f_{IN} = 10 MHz		84			83		dBc
		f_{IN} = 70 MHz	76.5	84			83		
		f_{IN} = 100 MHz		84			84		
		f_{IN} = 170 MHz		82			80		
		f_{IN} = 230 MHz		78			76		
IMD3	Third-order intermodulation distortion	f_{IN1} = 45 MHz, f_{IN2} = 50 MHz		92			92		dBFS
		f_{IN1} = 185 MHz, f_{IN2} = 190 MHz		87			87		

Copyright © 2014–2015, Texas Instruments Incorporated

7.10 AC Performance: ADC34J24

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J24 (f_S = 125 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio	f_{IN} = 10 MHz		70.3			70.6		dBFS
		f_{IN} = 70 MHz	68.8	70.1			70.4		
		f_{IN} = 100 MHz		69.9			70.2		
		f_{IN} = 170 MHz		69.1			69.7		
		f_{IN} = 230 MHz		68.6			69.1		
NSD	Noise spectral density (averaged across Nyquist zone)	f_{IN} = 10 MHz		148.3			148.6		dBFS/Hz
		f_{IN} = 70 MHz	146.8	148.1			148.4		
		f_{IN} = 100 MHz		147.9			148.2		
		f_{IN} = 170 MHz		147.1			147.7		
		f_{IN} = 230 MHz		146.6			147.1		
SINAD	Signal-to-noise and distortion ratio	f_{IN} = 10 MHz		70.3			70.5		dBFS
		f_{IN} = 70 MHz	67.6	70			70.3		
		f_{IN} = 100 MHz		69.8			70.1		
		f_{IN} = 170 MHz		68.9			69.3		
		f_{IN} = 230 MHz		68.4			68.8		
ENOB	Effective number of bits	f_{IN} = 10 MHz		11.4			11.4		Bits
		f_{IN} = 70 MHz	10.9	11.4			11.4		
		f_{IN} = 100 MHz		11.3			11.4		
		f_{IN} = 170 MHz		11.2			11.3		
		f_{IN} = 230 MHz		11.1			11.1		
SFDR	Spurious-free dynamic range	f_{IN} = 10 MHz		94			92		dBc
		f_{IN} = 70 MHz	81	93			91		
		f_{IN} = 100 MHz		93			92		
		f_{IN} = 170 MHz		85			83		
		f_{IN} = 230 MHz		83			82		
HD2	Second harmonic distortion	f_{IN} = 10 MHz		93			93		dBc
		f_{IN} = 70 MHz	81	94			94		
		f_{IN} = 100 MHz		92			92		
		f_{IN} = 170 MHz		83			83		
		f_{IN} = 230 MHz		82			82		
HD3	Third harmonic distortion	f_{IN} = 10 MHz		96			93		dBc
		f_{IN} = 70 MHz	83	94			91		
		f_{IN} = 100 MHz		95			93		
		f_{IN} = 170 MHz		88			86		
		f_{IN} = 230 MHz		87			88		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f_{IN} = 10 MHz		99			95		dBc
		f_{IN} = 70 MHz	87	98			95		
		f_{IN} = 100 MHz		97			95		
		f_{IN} = 170 MHz		97			92		
		f_{IN} = 230 MHz		95			92		

Copyright © 2014–2015, Texas Instruments Incorporated

AC Performance: ADC34J24 (continued)

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J24 (f_S = 125 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
THD	Total harmonic distortion	f_{IN} = 10 MHz		89			87		dBc
		f_{IN} = 70 MHz	76.5	89			87		
		f_{IN} = 100 MHz		89			87		
		f_{IN} = 170 MHz		82			80		
		f_{IN} = 230 MHz		81			80		
IMD3	Third-order intermodulation distortion	f_{IN1} = 45 MHz, f_{IN2} = 50 MHz		97			97		dBFS
		f_{IN1} = 185 MHz, f_{IN2} = 190 MHz		89			89		

Copyright © 2014–2015, Texas Instruments Incorporated

7.11 AC Performance: ADC34J23

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J23 (f_S = 80 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio	f_{IN} = 10 MHz		70.2			70.4		dBFS
		f_{IN} = 70 MHz	68.7	70			70.3		
		f_{IN} = 100 MHz		69.9			70.1		
		f_{IN} = 170 MHz		69.3			69.6		
		f_{IN} = 230 MHz		68.7			68.9		
NSD	Noise spectral density (averaged across Nyquist zone)	f_{IN} = 10 MHz		146.1			146.3		dBFS/Hz
		f_{IN} = 70 MHz	144.8	145.9			146.2		
		f_{IN} = 100 MHz		145.8			146.0		
		f_{IN} = 170 MHz		145.2			145.5		
		f_{IN} = 230 MHz		144.6			144.8		
SINAD	Signal-to-noise and distortion ratio	f_{IN} = 10 MHz		70.2			70.3		dBFS
		f_{IN} = 70 MHz	67.6	70			70.2		
		f_{IN} = 100 MHz		69.8			69.9		
		f_{IN} = 170 MHz		69.1			69.3		
		f_{IN} = 230 MHz		68.2			68.4		
ENOB	Effective number of bits	f_{IN} = 10 MHz		11.4			11.4		Bits
		f_{IN} = 70 MHz	10.9	11.4			11.4		
		f_{IN} = 100 MHz		11.3			11.3		
		f_{IN} = 170 MHz		11.2			11.3		
		f_{IN} = 230 MHz		11.1			11.1		
SFDR	Spurious-free dynamic range	f_{IN}= 10 MHz		95			91		dBc
		f_{IN} = 70 MHz	82	95			90		
		f_{IN} = 100 MHz		90			89		
		f_{IN} = 170 MHz		87			84		
		f_{IN} = 230 MHz		80			80		
HD2	Second harmonic distortion	f_{IN} = 10 MHz		95			95		dBc
		f_{IN} = 70 MHz	82	95			94		
		f_{IN} = 100 MHz		91			92		
		f_{IN} = 170 MHz		83			83		
		f_{IN} = 230 MHz		81			82		
HD3	Third harmonic distortion	f_{IN} = 10 MHz		99			94		dBc
		f_{IN} = 70 MHz	83	101			94		
		f_{IN} = 100 MHz		91			90		
		f_{IN} = 170 MHz		92			90		
		f_{IN} = 230 MHz		80			80		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f_{IN} = 10 MHz		98			92		dBc
		f_{IN} = 70 MHz	87	98			92		
		f_{IN} = 100 MHz		97			91		
		f_{IN} = 170 MHz		96			91		
		f_{IN} = 230 MHz		93			91		

Copyright © 2014–2015, Texas Instruments Incorporated

AC Performance: ADC34J23 (continued)

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J23 (f_S = 80 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
THD	Total harmonic distortion	f_{IN} = 10 MHz		91			86		dBc
		f_{IN} = 70 MHz	76.5	91			86		
		f_{IN} = 100 MHz		87			84		
		f_{IN} = 170 MHz		82			81		
		f_{IN} = 230 MHz		77			77		
IMD3	Third-order intermodulation distortion	f_{IN1} = 45 MHz, f_{IN2} = 50 MHz		95			95		dBFS
		f_{IN1} = 185 MHz, f_{IN2} = 190 MHz		88			88		

Copyright © 2014–2015, Texas Instruments Incorporated

7.12 AC Performance: ADC34J22

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J22 (f_S = 50 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio	f_{IN} = 10 MHz	69.3	70.2			70.5		dBFS
		f_{IN} = 70 MHz		70			70.3		
		f_{IN} = 100 MHz		69.9			70.2		
		f_{IN} = 170 MHz		69.3			69.5		
		f_{IN} = 230 MHz		67.9			68		
NSD	Noise spectral density (averaged across Nyquist zone)	f_{IN} = 10 MHz	143.3	144.2			144.5		dBFS/Hz
		f_{IN} = 70 MHz		144			144.3		
		f_{IN} = 100 MHz		143.9			144.2		
		f_{IN} = 170 MHz		143.3			143.5		
		f_{IN} = 230 MHz		141.9			142		
SINAD	Signal-to-noise and distortion ratio	f_{IN} = 10 MHz	67.6	70.2			70.4		dBFS
		f_{IN} = 70 MHz		69.9			70.1		
		f_{IN} = 100 MHz		69.8			70		
		f_{IN} = 170 MHz		69.1			69.3		
		f_{IN} = 230 MHz		67.5			67.6		
ENOB	Effective number of bits	f_{IN} = 10 MHz	10.9	11.4			11.4		Bits
		f_{IN} = 70 MHz		11.3			11.3		
		f_{IN} = 100 MHz		11.3			11.3		
		f_{IN} = 170 MHz		11.2			11.2		
		f_{IN} = 230 MHz		10.9			10.9		
SFDR	Spurious-free dynamic range	f_{IN} = 10 MHz	84.5	95			91		dBc
		f_{IN} = 70 MHz		93			90		
		f_{IN} = 100 MHz		90			89		
		f_{IN} = 170 MHz		85			84		
		f_{IN} = 230 MHz		80			80		
HD2	Second harmonic distortion	f_{IN} = 10 MHz	84.5	94			93		dBc
		f_{IN} = 70 MHz		93			93		
		f_{IN} = 100 MHz		90			90		
		f_{IN} = 170 MHz		83			83		
		f_{IN} = 230 MHz		81			81		
HD3	Third harmonic distortion	f_{IN} = 10 MHz	84.5	102			96		dBc
		f_{IN} = 70 MHz		94			92		
		f_{IN} = 100 MHz		90			89		
		f_{IN} = 170 MHz		91			90		
		f_{IN} = 230 MHz		80			80		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f_{IN} = 10 MHz	87	98			92		dBc
		f_{IN} = 70 MHz		97			92		
		f_{IN} = 100 MHz		96			92		
		f_{IN} = 170 MHz		95			91		
		f_{IN} = 230 MHz		93			91		

Copyright © 2014–2015, Texas Instruments Incorporated

AC Performance: ADC34J22 (continued)

Typical values are at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	ADC34J22 (f_S = 50 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
THD	Total harmonic distortion	f_{IN} = 10 MHz	76.5	91			86		dBc
		f_{IN} = 70 MHz		89			85		
		f_{IN} = 100 MHz		86			84		
		f_{IN} = 170 MHz		82			81		
		f_{IN} = 230 MHz		77			77		
IMD3	Third-order intermodulation distortion	f_{IN1} = 45 MHz, f_{IN2} = 50 MHz		93			93		dBFS
		f_{IN1} = 185 MHz, f_{IN2} = 190 MHz		86			86		

7.13 Digital Characteristics

The dc specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1. AVDD = DVDD = 1.8 V and –1-dBFS differential input, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUTS (RESET, SCLK, SEN, SDATA, PDN)(1)						
V_{IH}	High-level input voltage	All digital inputs support 1.8-V and 3.3-V logic levels	1.2			V
V_{IL}	Low-level input voltage	All digital inputs support 1.8-V and 3.3-V logic levels			0.4	V
I_{IH}	High-level input current	SEN		0		µA
		RESET, SCLK, SDATA, PDN		10		µA
I_{IL}	Low-level input current	SEN		10		µA
		RESET, SCLK, SDATA, PDN		0		µA
DIGITAL INPUTS (SYNCP~, SYNCM~, SYSREFP, SYSREFM)						
V_{IH}	High-level input voltage			1.3		V
V_{IL}	Low-level input voltage			0.5		V
$V_{(CM_DIG)}$	Common-mode voltage for SYNC~ and SYSREF			0.9		V
DIGITAL OUTPUTS (SDOUT, OVRA, OVRB, OVRC, OVRD)						
V_{OH}	High-level output voltage		DVDD – 0.1	DVDD		V
V_{OL}	Low-level output voltage				0.1	V
DIGITAL OUTPUTS (JESD204B Interface: DxP, DxM)(2)						
V_{OH}	High-level output voltage			DVDD		V
V_{OL}	Low-level output voltage			DVDD – 0.4		V
V_{OD}	Output differential voltage			0.4		V
V_{OC}	Output common-mode voltage			DVDD – 0.2		V
	Transmitter short-circuit current	Transmitter pins shorted to any voltage between –0.25 V and 1.45 V	–100		100	mA
z_{os}	Single-ended output impedance			50		Ω
	Output capacitance	Output capacitance inside the device, from either output to ground		2		pF

(1) RESET, SCLK, SDATA, and PDN pins have 150-kΩ (typical) internal pull-down resistor to ground, while SEN pin has 150-kΩ (typical) pull-up resistor to AVDD.
(2) 50-Ω, single-ended external termination to 1.8 V.

Copyright © 2014–2015, Texas Instruments Incorporated

7.14 Timing Characteristics

Typical values are at 25°C, AVDD = DVDD = 1.8 V, and –1-dBFS differential input, unless otherwise noted. Minimum and maximum values are across the full temperature range: T_{MIN} = –40°C to T_{MAX} = 85°C. See Figure 143.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SAMPLE TIMING CHARACTERISTICS						
	Aperture delay		0.85	1.25	1.65	ns
	Aperture delay matching	Between two channels on the same device		±70		ps
		Between two devices at the same temperature and supply voltage		±150		ps
	Aperture jitter			200		f_S rms
	Wake-up time	Time to valid data after coming out of STANDBY mode		35	100	µs
		Time to valid data after coming out of global power-down		85	300	µs
$t_{SU_SYNC\sim}$	Setup time for SYNC~	Referenced to input clock rising edge	1			ns
$t_{H_SYNC\sim}$	Hold time for SYNC~	Referenced to input clock rising edge	100			ps
t_{SU_SYSREF}	Setup time for SYSREF	Referenced to input clock rising edge	1			ns
t_{H_SYSREF}	Hold time for SYSREF	Referenced to input clock rising edge	100			ps
CML OUTPUT TIMING CHARACTERISTICS						
	Unit interval		312.5		1667	ps
	Serial output data rate				3.2	Gbps
	Total jitter	3.125 Gbps (20x mode, f_S = 156.25 MSPS)		0.3		$_{P\text{-}P}$UI
t_R, t_F	Data rise time, data fall time	Rise and fall times measured from 20% to 80%, differential output waveform, 600 Mbps ≤ bit rate ≤ 3.125 Gbps		105		ps

Table 2. Latency in Different Modes(1)(2)

MODE	PARAMETER	LATENCY (N Cycles)	TYPICAL DATA DELAY (t_D, ns)
20x	ADC latency	17	0.29 × t_S + 3
	Normal OVR latency	9	0.5 × t_S + 2
	Fast OVR latency	7	0.5 × t_S + 2
	From SYNC~ falling edge to CGS phase(3)	15	0.3 × t_S + 4
	From SYNC~ rising edge to ILA sequence(4)	17	0.3 × t_S + 4
40x	ADC latency	16	0.85 × t_S + 3.9
	Normal OVR latency	9	0.5 × t_S + 2
	Fast OVR latency	7	0.5 × t_S + 2
	From SYNC~ falling edge to CGS phase(3)	14	0.9 × t_S + 4
	From SYNC~ rising edge to ILA sequence(4)	12	0.9 × t_S + 4

(1) Overall latency = latency + t_D.
(2) t_S is the time period of the ADC conversion clock.
(3) Latency is specified for subclass 2. In subclass 0, the SYNC~ falling edge to CGS phase latency is 16 clock cycles in 10x mode and 15 clock cycles in 20x mode.
(4) Latency is specified for subclass 2. In subclass 0, the SYNC~ rising edge to ILA sequence latency is 11 clock cycles in 10x mode and 11 clock cycles in 20x mode.

Copyright © 2014–2015, Texas Instruments Incorporated

7.15 Typical Characteristics: ADC34J25

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

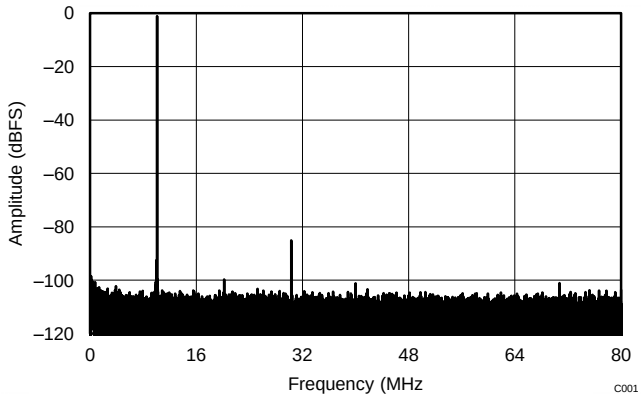

f_S = 160 MSPS, SNR = 70.3 dBFS, f_{IN} = 10 MHz, SFDR = 84 dBc

Figure 1. FFT for 10-MHz Input Signal (Dither On)

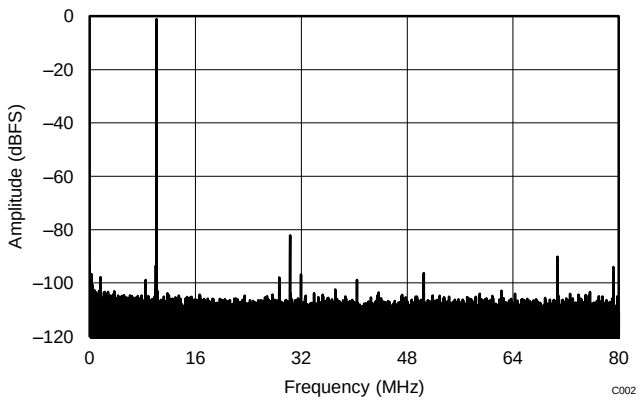

f_S = 160 MSPS, SNR = 70.7 dBFS, f_{IN} = 10 MHz, SFDR = 81.1 dBc

Figure 2. FFT for 10-MHz Input Signal (Dither Off)

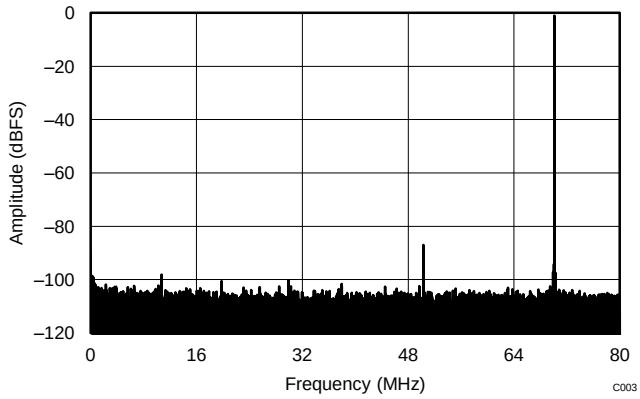

f_S = 160 MSPS, SNR = 69.7 dBFS, f_{IN} = 70 MHz, SFDR = 86 dBc

Figure 3. FFT for 70-MHz Input Signal (Dither On)

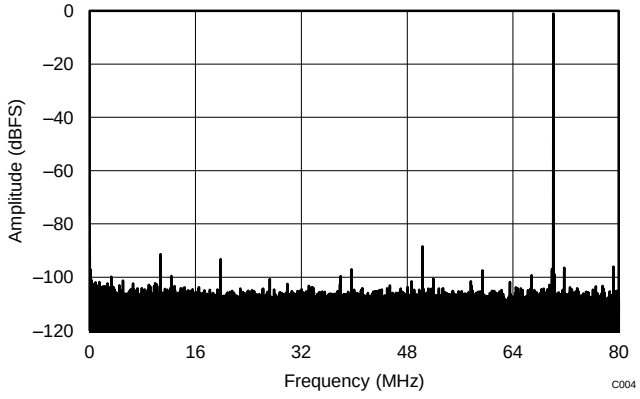

f_S = 160 MSPS, SNR = 70.1 dBFS, f_{IN} = 70 MHz, SFDR = 87.5 dBc

Figure 4. FFT for 70-MHz Input Signal (Dither Off)

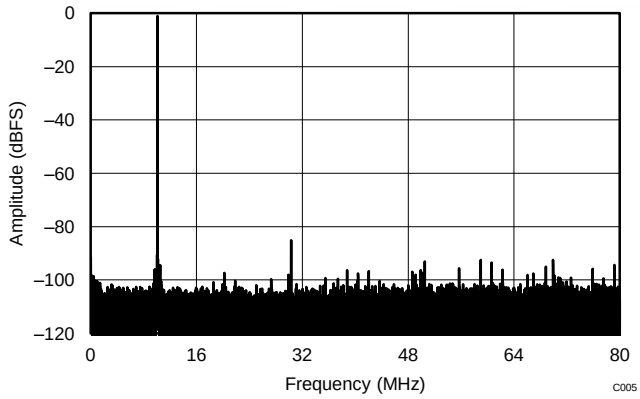

f_S = 160 MSPS, SNR = 67.9 dBFS, f_{IN} = 170 MHz, SFDR = 84.1 dBc

Figure 5. FFT for 170-MHz Input Signal (Dither On)

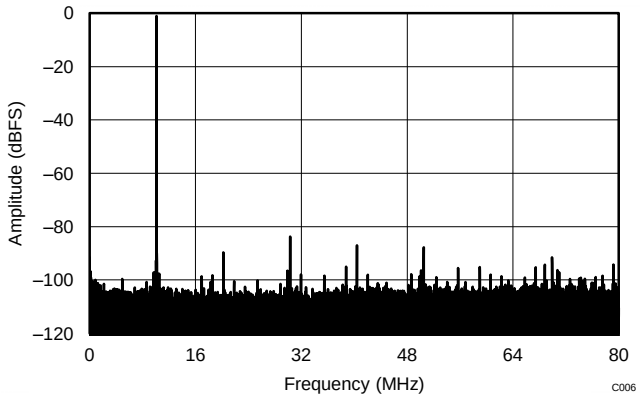

f_S = 160 MSPS, SNR = 68.1 dBFS, f_{IN} = 70 MHz, SFDR = 82.7 dBc

Figure 6. FFT for 170-MHz Input Signal (Dither Off)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J25 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

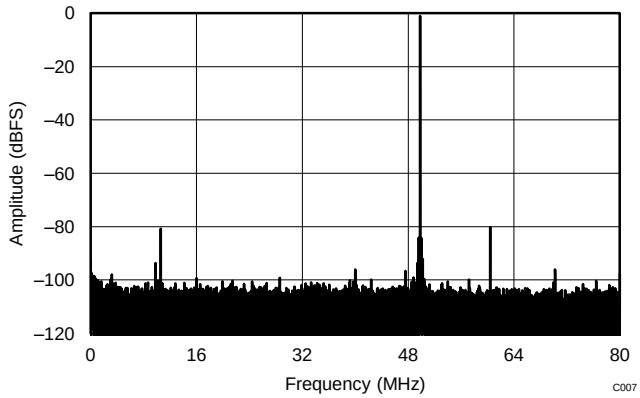

f_S = 160 MSPS, SNR = 67.0 dBFS, f_{IN} = 270 MHz, SFDR = 76.2 dBc

Figure 7. FFT for 270-MHz Input Signal (Dither On)

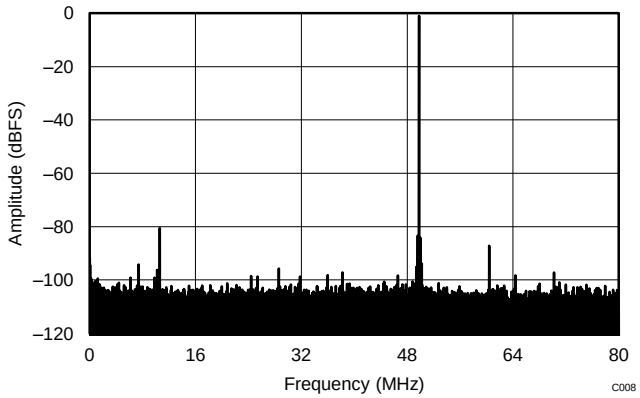

f_S = 160 MSPS, SNR = 67.5 dBFS, f_{IN} = 270 MHz, SFDR = 75.9 dBc

Figure 8. FFT for 270-MHz Input Signal (Dither Off)

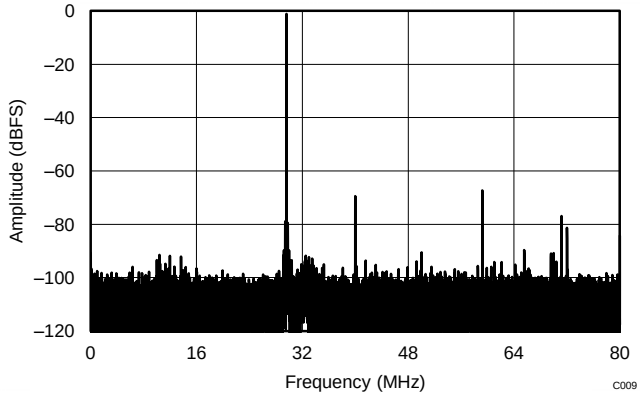

f_S = 160 MSPS, SNR = 62.9 dBFS, f_{IN} = 450 MHz, SFDR = 67.8 dBc

Figure 9. FFT for 450-MHz Input Signal (Dither On)

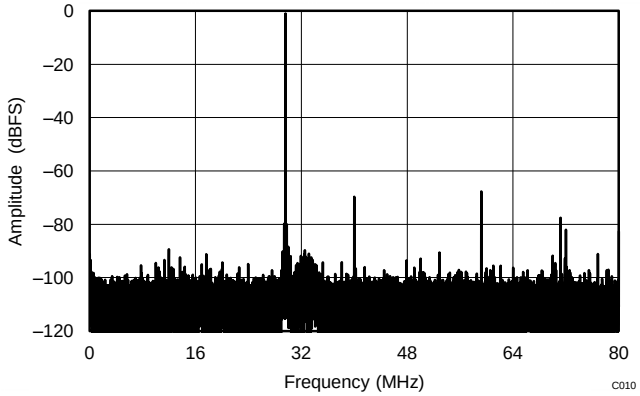

f_S = 160 MSPS, SNR = 63.6 dBFS, f_{IN} = 450 MHz, SFDR = 67.6 dBc

Figure 10. FFT for 450-MHz Input Signal (Dither Off)

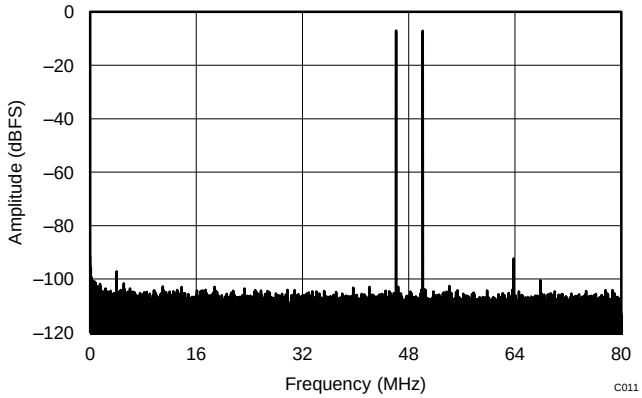

f_S = 160 MSPS, IMD = 92 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 96 dBFS

Figure 11. FFT for Two-Tone Input Signal (–7 dBFS at 46 MHz and 50 MHz)

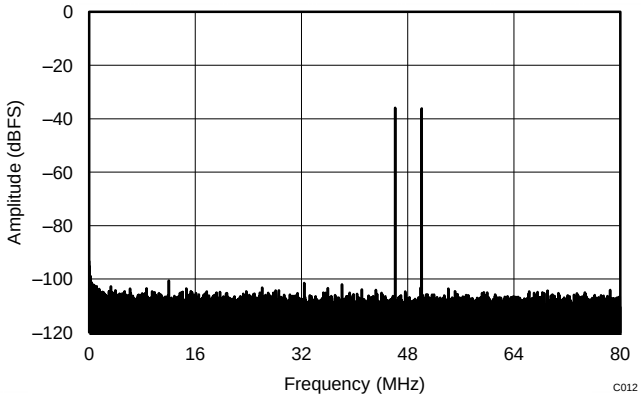

f_S = 160 MSPS, IMD = 98 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 102 dBFS

Figure 12. FFT for Two-Tone Input Signal (–36 dBFS at 46 MHz and 50 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J25 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

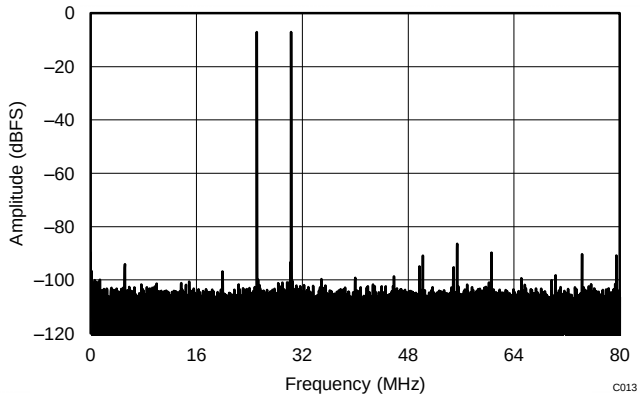

f_S = 160 MSPS, IMD = 87 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 90 dBFS

Figure 13. FFT for Two-Tone Input Signal (–7 dBFS at 185 MHz and 190 MHz)

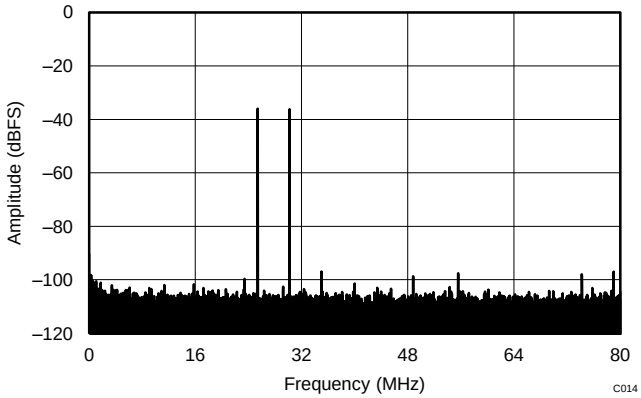

f_S = 160 MSPS, IMD = 98 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 102 dBFS

Figure 14. FFT for Two-Tone Input Signal (–36 dBFS at 185 MHz and 190 MHz)

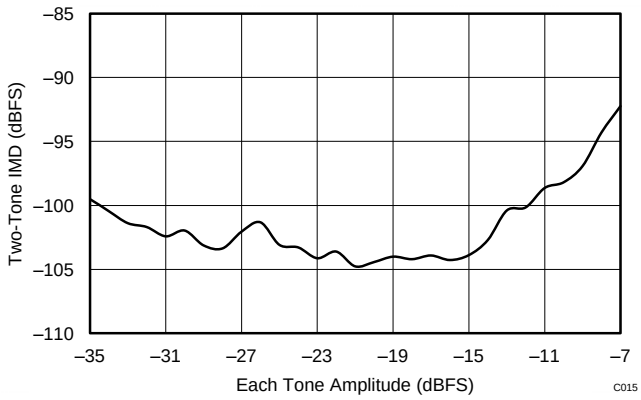

Figure 15. Intermodulation Distortion vs Input Amplitude (46 MHz and 50 MHz)

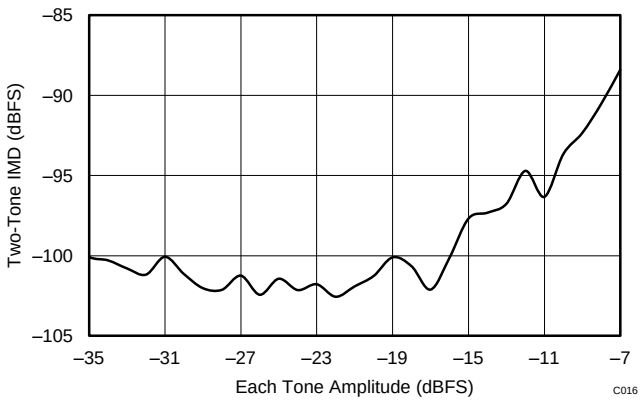

Figure 16. Intermodulation Distortion vs Input Amplitude (185 MHz and 190 MHz)

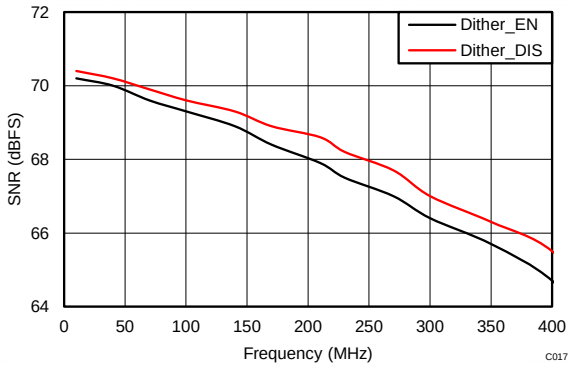

Figure 17. Signal-to-Noise Ratio vs Input Frequency

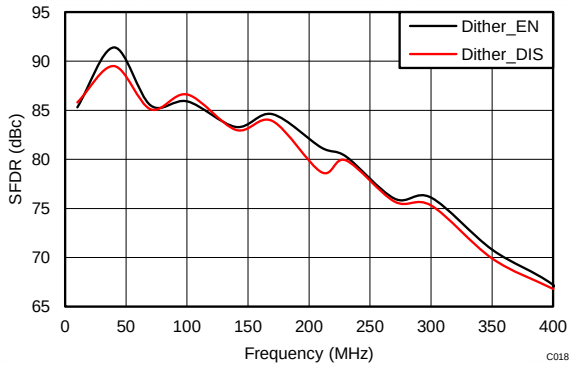

Figure 18. Spurious-Free Dynamic Range vs Input Frequency

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J25 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

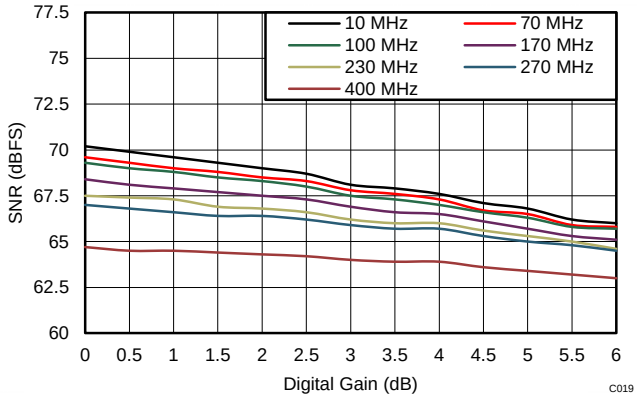

Figure 19. Signal-to-Noise Ratio vs Digital Gain and Input Frequency

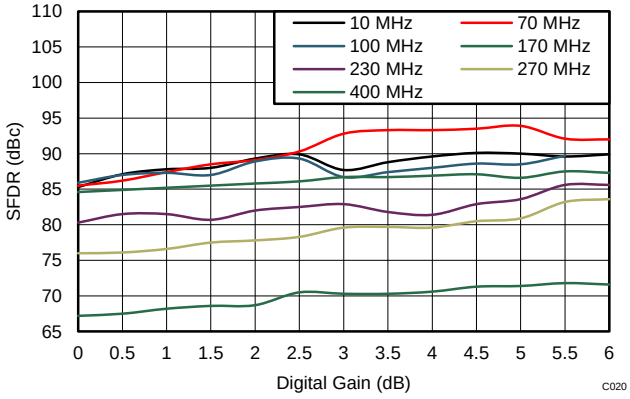

Figure 20. Spurious-Free Dynamic Range vs Digital Gain and Input Frequency

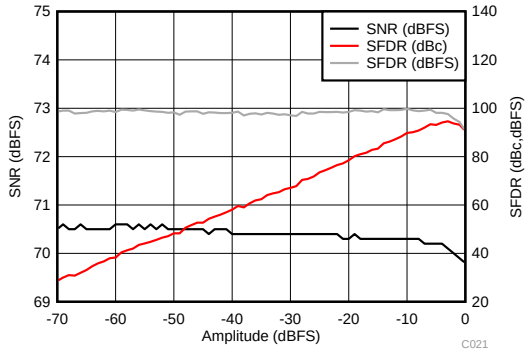

Figure 21. Performance vs Input Amplitude (30 MHz)

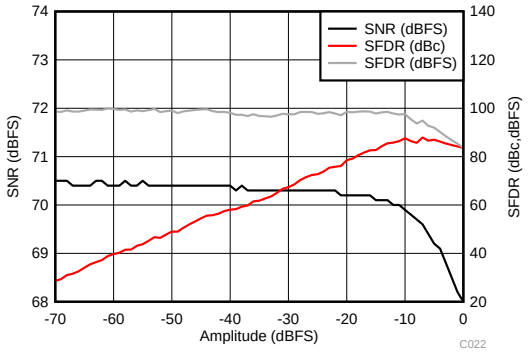

Figure 22. Performance vs Input Amplitude (170 MHz)

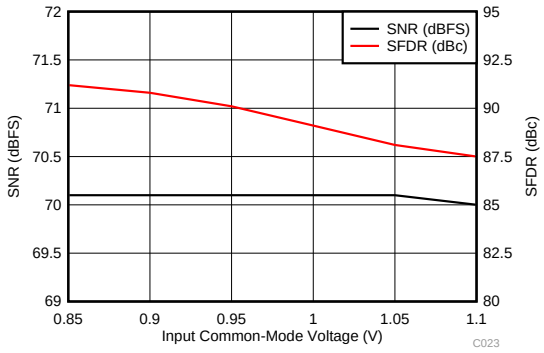

Figure 23. Performance vs Input Common-Mode Voltage (30 MHz)

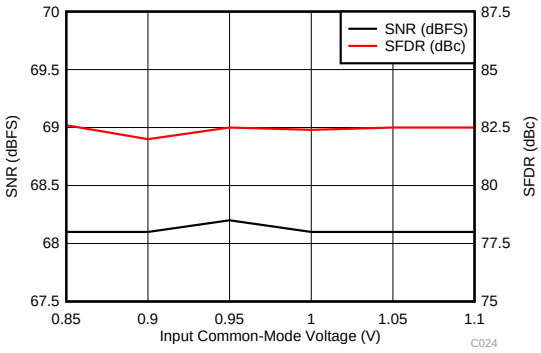

Figure 24. Performance vs Input Common-Mode Voltage (170 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J25 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

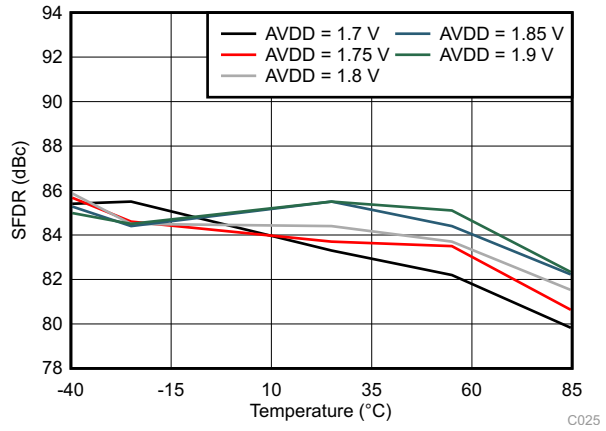

Figure 25. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

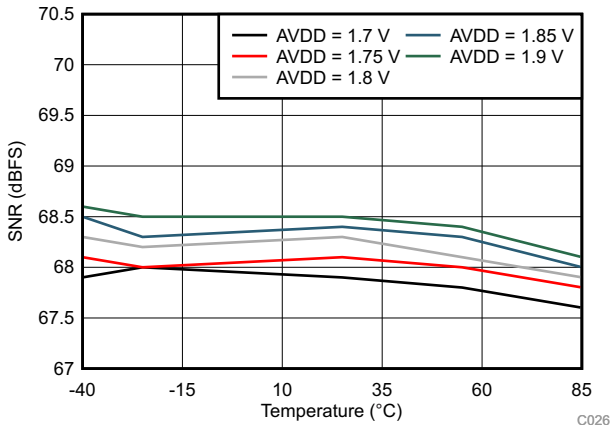

Figure 26. Signal-to-Noise Ratio vs AVDD Supply and Temperature

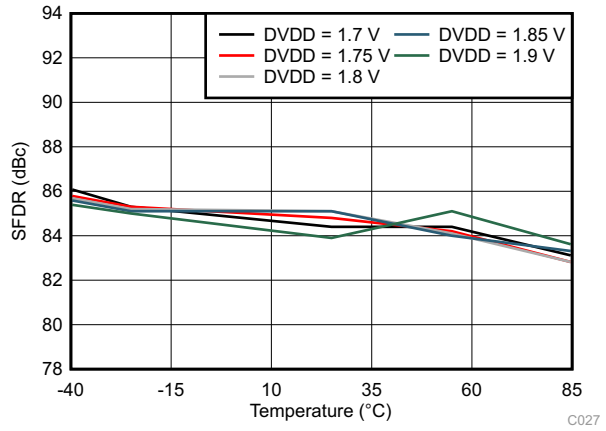

Figure 27. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

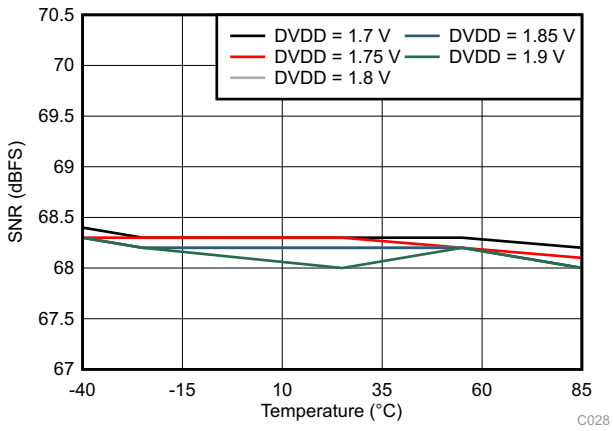

Figure 28. Signal-to-Noise Ratio vs DVDD Supply and Temperature

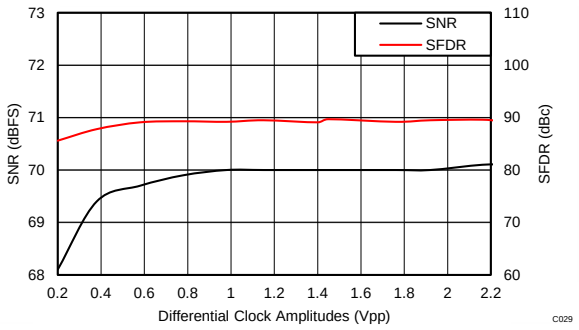

Figure 29. Performance vs Clock Amplitude (40 MHz)

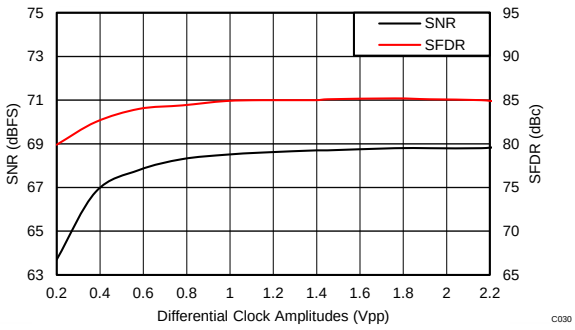

Figure 30. Performance vs Clock Amplitude (150 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J25 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, 32k-point FFT, dither enabled, and special modes written, unless otherwise noted.

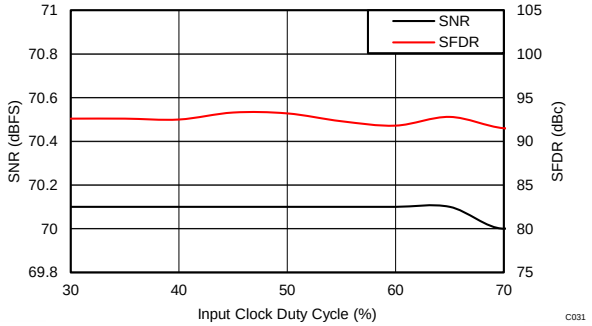

Figure 31. Performance vs Clock Duty Cycle (40 MHz)

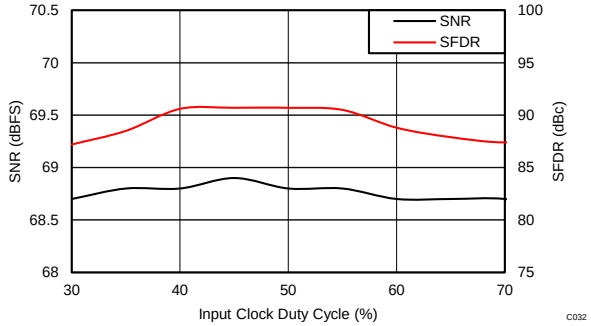

Figure 32. Performance vs Clock Duty Cycle (150 MHz)

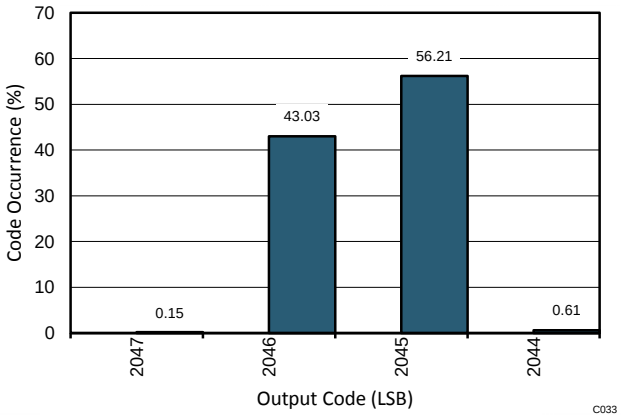

RMS noise = 1.3 LSBs

Figure 33. Idle Channel Histogram

7.16 Typical Characteristics: ADC34J24

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

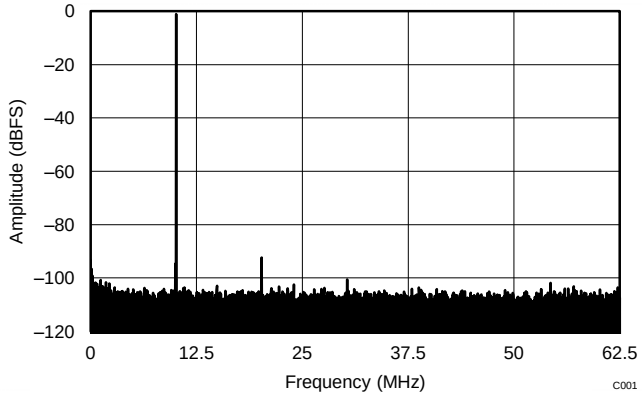

f_S = 125 MSPS, SNR = 70.3 dBFS, f_{IN} = 10 MHz, SFDR = 91.3 dBc

Figure 34. FFT for 10-MHz Input Signal (Dither On)

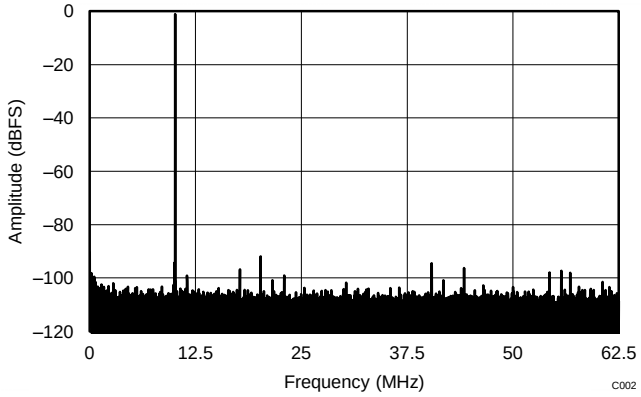

f_S = 125 MSPS, SNR = 70.5 dBFS, f_{IN} = 10 MHz, SFDR = 90.9 dBc

Figure 35. FFT for 10-MHz Input Signal (Dither Off)

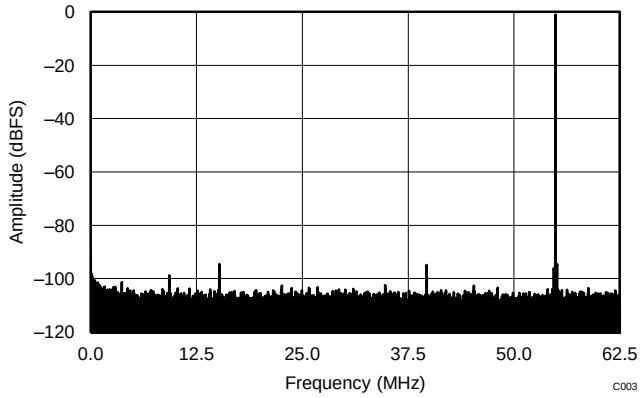

f_S = 125 MSPS, SNR = 70 dBFS, f_{IN} = 70 MHz, SFDR = 93.5 dBc

Figure 36. FFT for 70-MHz Input Signal (Dither On)

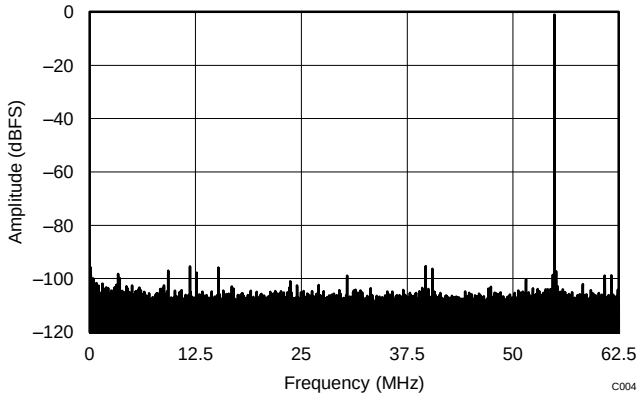

f_S = 125 MSPS, SNR = 70.3 dBFS, f_{IN} = 70 MHz, SFDR = 94.3 dBc

Figure 37. FFT for 70-MHz Input Signal (Dither Off)

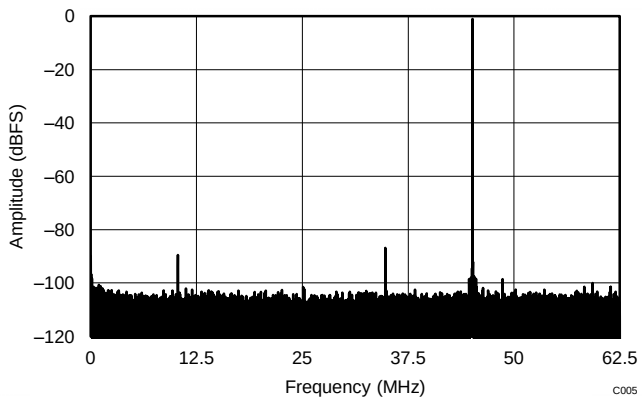

f_S = 125 MSPS, SNR = 69 dBFS, f_{IN} = 170 MHz, SFDR = 85.9 dBc

Figure 38. FFT for 170-MHz Input Signal (Dither On)

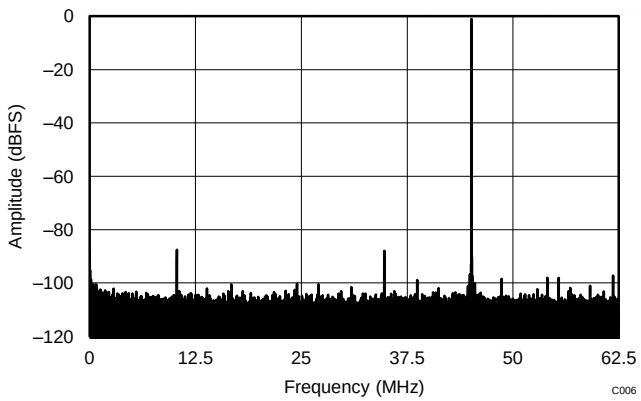

f_S = 125 MSPS, SNR = 69.6 dBFS, f_{IN} = 70 MHz, SFDR = 86.5 dBc

Figure 39. FFT for 170-MHz Input Signal (Dither Off)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J24 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

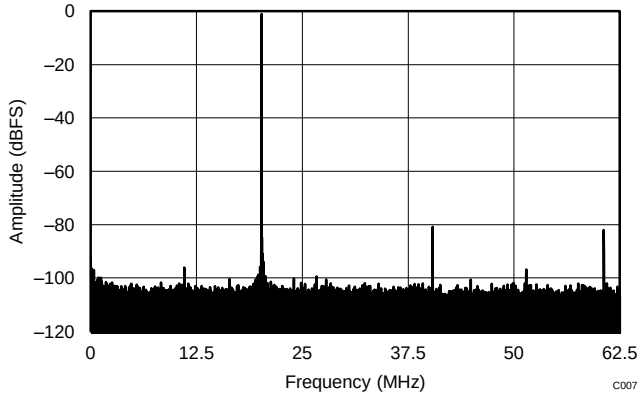

f_S = 125 MSPS, SNR = 68.4 dBFS, f_{IN} = 270 MHz, SFDR = 79.8 dBc

Figure 40. FFT for 270-MHz Input Signal (Dither On)

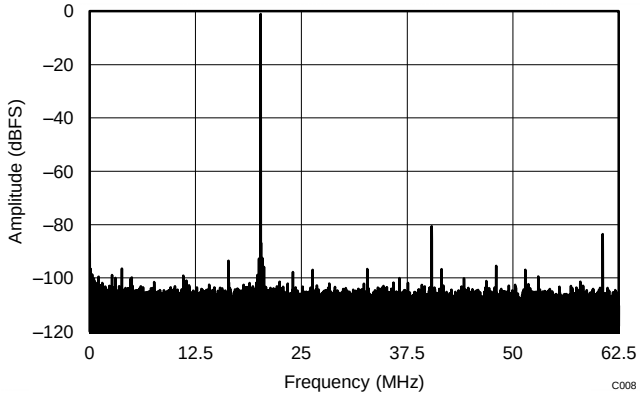

f_S = 125 MSPS, SNR = 68.8 dBFS, f_{IN} = 270 MHz, SFDR = 79.6 dBc

Figure 41. FFT for 270-MHz Input Signal (Dither Off)

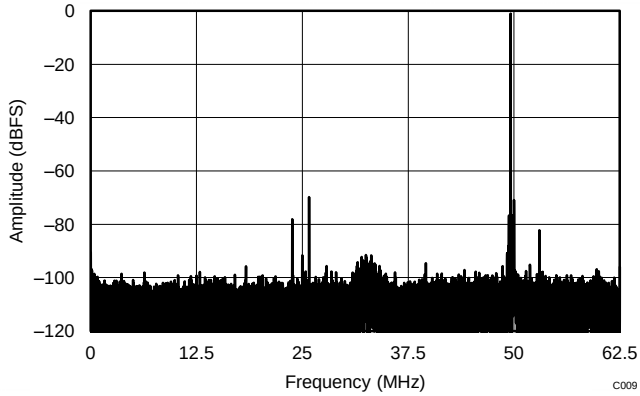

f_S = 125 MSPS, SNR = 65.2 dBFS, f_{IN} = 450 MHz, SFDR = 62.9 dBc

Figure 42. FFT for 450-MHz Input Signal (Dither On)

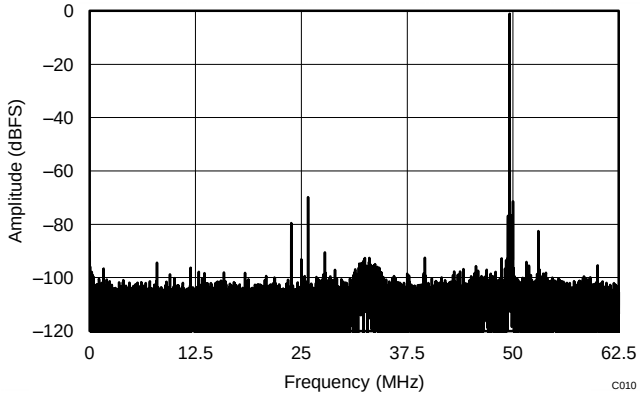

f_S = 125 MSPS, SNR = 66.1 dBFS, f_{IN} = 450 MHz, SFDR = 63.1 dBc

Figure 43. FFT for 450-MHz Input Signal (Dither Off)

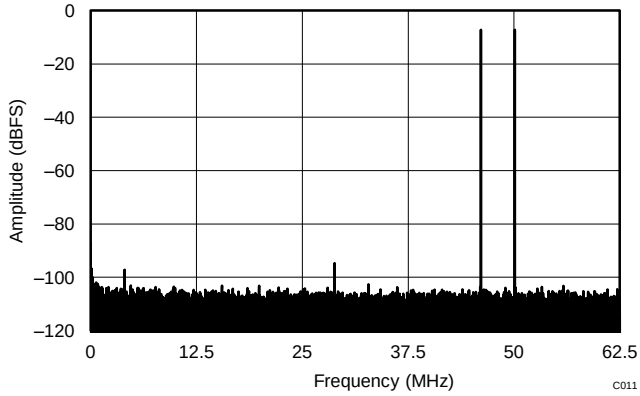

f_S = 125 MSPS, IMD = 93 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 97 dBFS

Figure 44. FFT for Two-Tone Input Signal (–7dBFS at 46 MHz and 50 MHz)

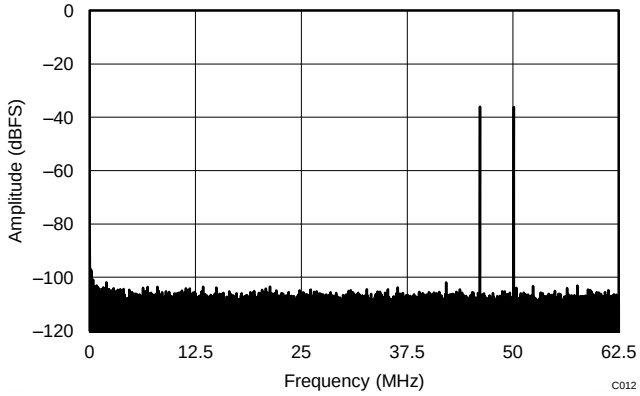

f_S = 125 MSPS, IMD = 101 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 106 dBFS

Figure 45. FFT for Two-Tone Input Signal (–36 dBFS at 46 MHz and 50 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J24 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

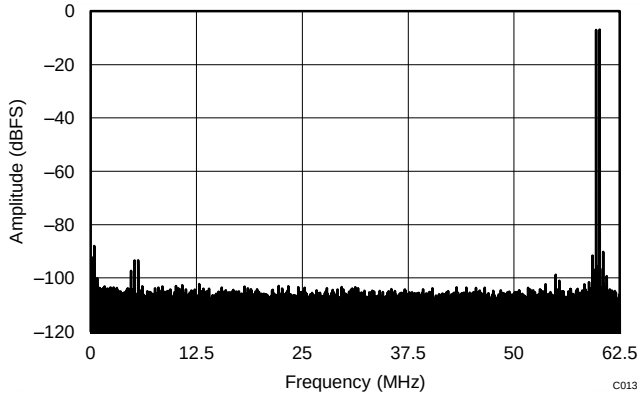

f_S = 125 MSPS, IMD = 89 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 92 dBFS

Figure 46. FFT for Two-Tone Input Signal (–7 dBFS at 185 MHz and 190 MHz)

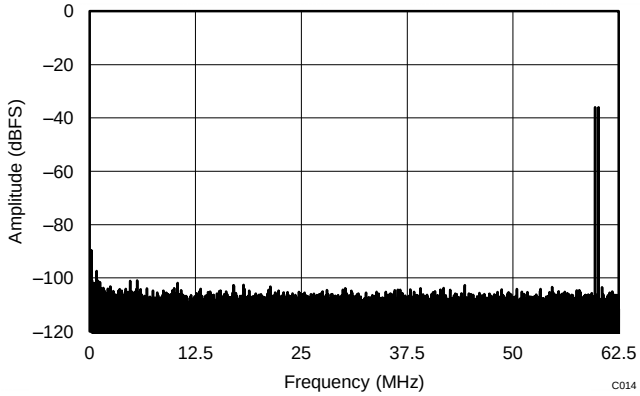

f_S = 125 MSPS, IMD = 99 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 103 dBFS

Figure 47. FFT for Two-Tone Input Signal (–36 dBFS at 185 MHz and 190 MHz)

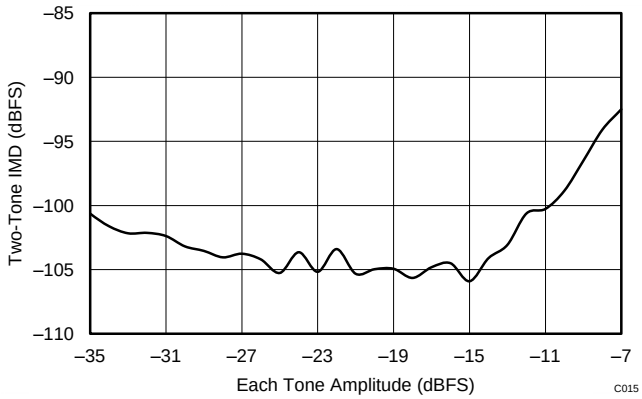

Figure 48. Intermodulation Distortion vs Input Amplitude (46 MHz and 50 MHz)

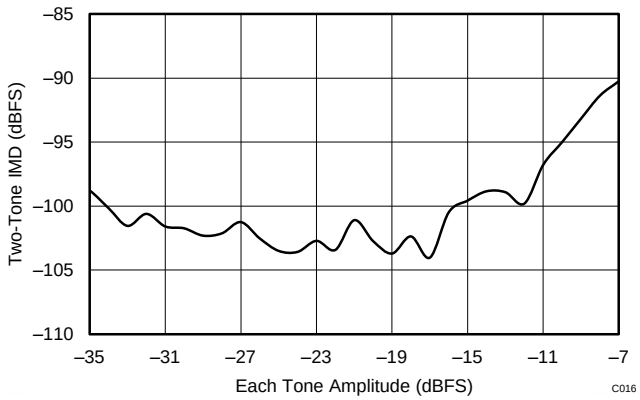

Figure 49. Intermodulation Distortion vs Input Amplitude (185 MHz and 190 MHz)

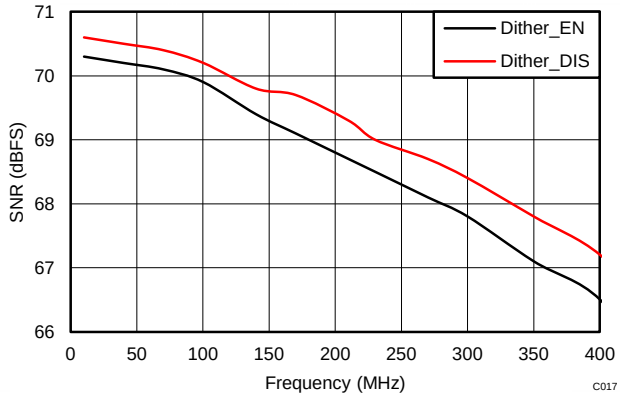

Figure 50. Signal-to-Noise Ratio vs Input Frequency

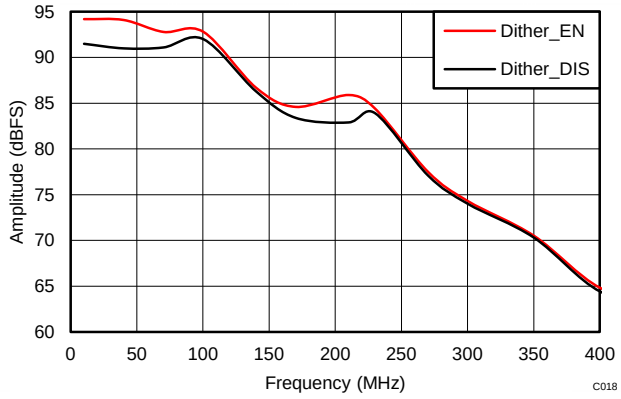

Figure 51. Spurious-Free Dynamic Range vs Input Frequency

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J24 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

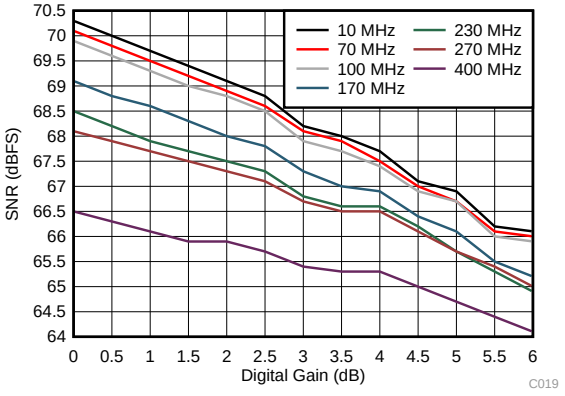

Figure 52. Signal-to-Noise Ratio vs Digital Gain and Input Frequency

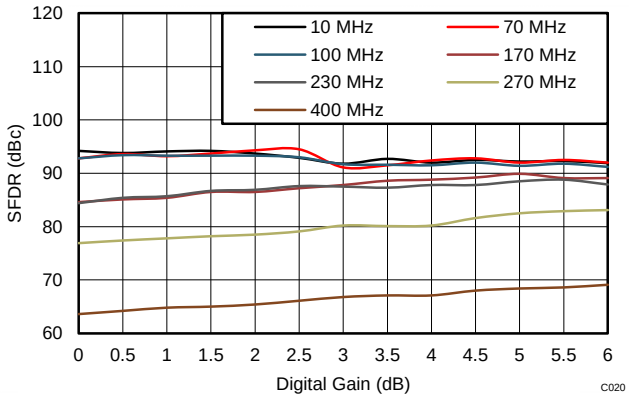

Figure 53. Spurious-Free Dynamic Range vs Digital Gain and Input Frequency

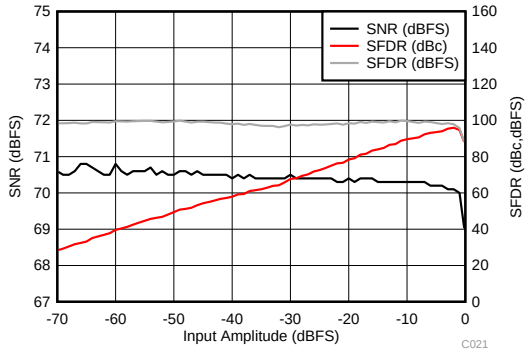

Figure 54. Performance vs Input Amplitude (30 MHz)

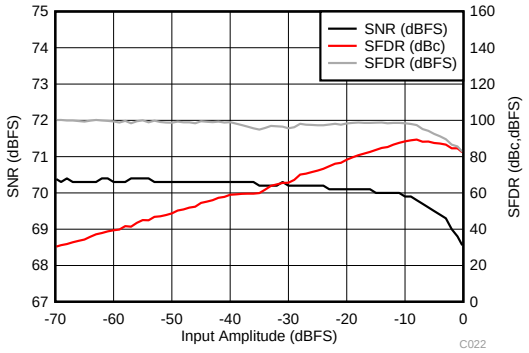

Figure 55. Performance vs Input Amplitude (170 MHz)

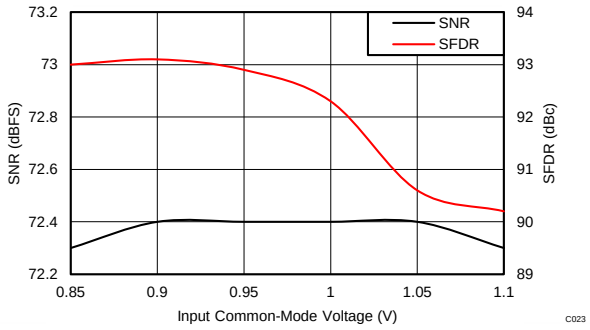

Figure 56. Performance vs Input Common-Mode Voltage (30 MHz)

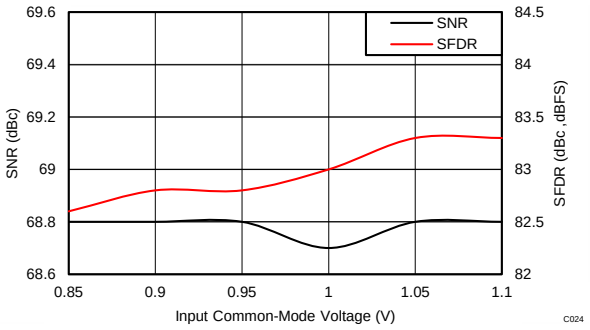

Figure 57. Performance vs Input Common-Mode Voltage (170 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J24 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

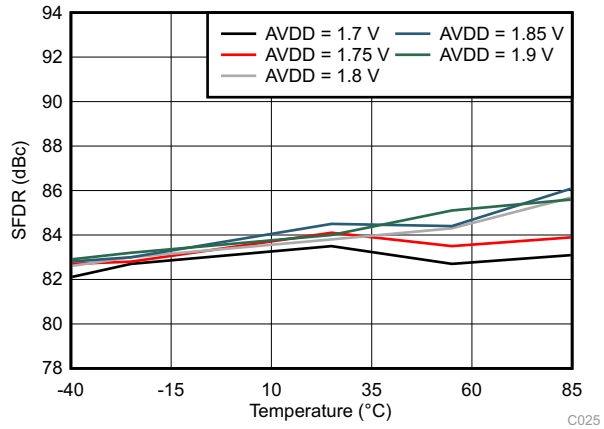

Figure 58. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

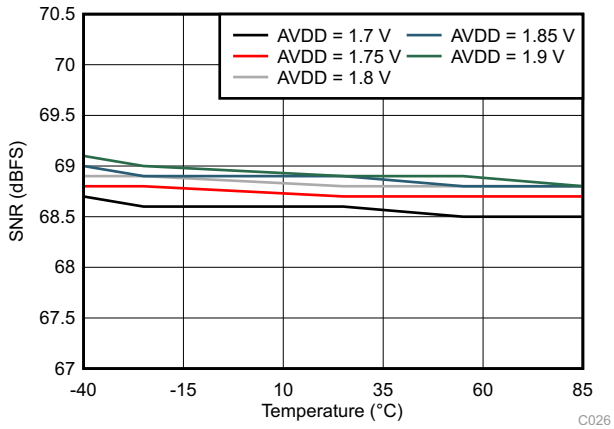

Figure 59. Signal-to-Noise Ratio vs AVDD Supply and Temperature

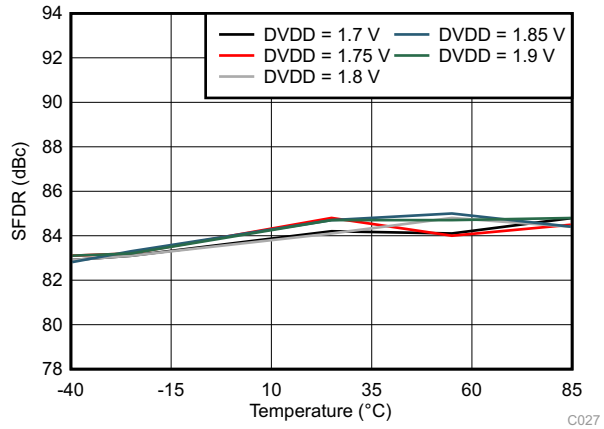

Figure 60. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

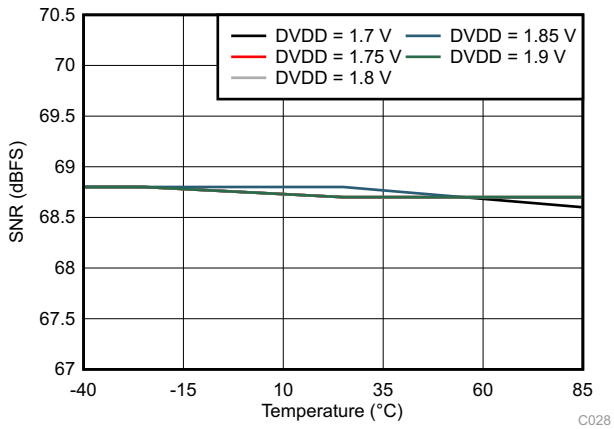

Figure 61. Signal-to-Noise Ratio vs DVDD Supply and Temperature

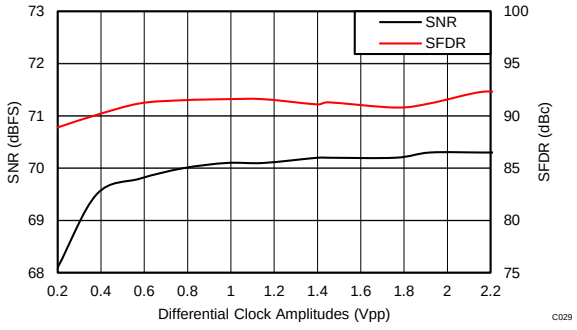

Figure 62. Performance vs Clock Amplitude (40 MHz)

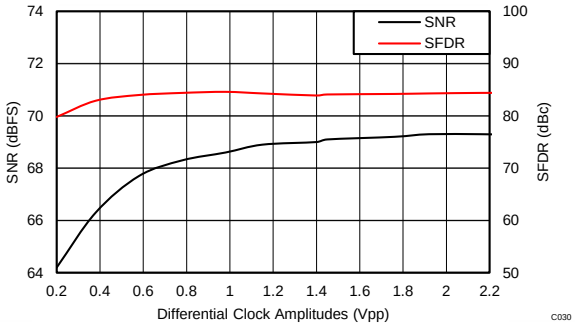

Figure 63. Performance vs Clock Amplitude (150 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J24 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 125 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

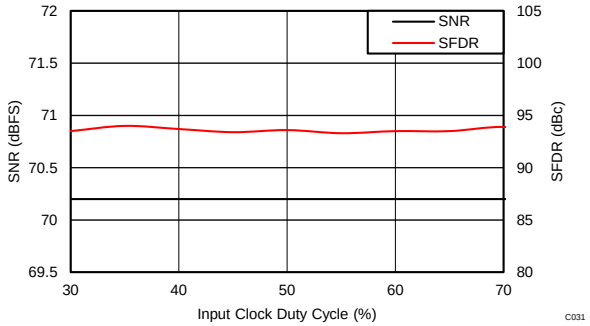

Figure 64. Performance vs Clock Duty Cycle (40 MHz)

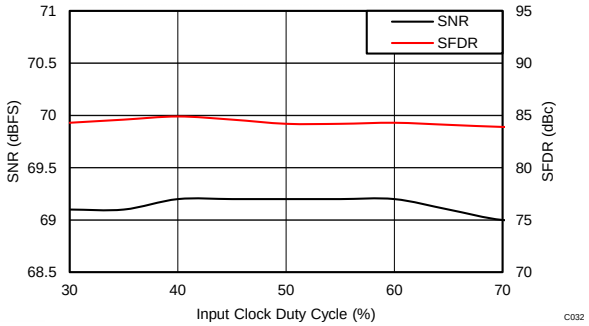

Figure 65. Performance vs Clock Duty Cycle (150 MHz)

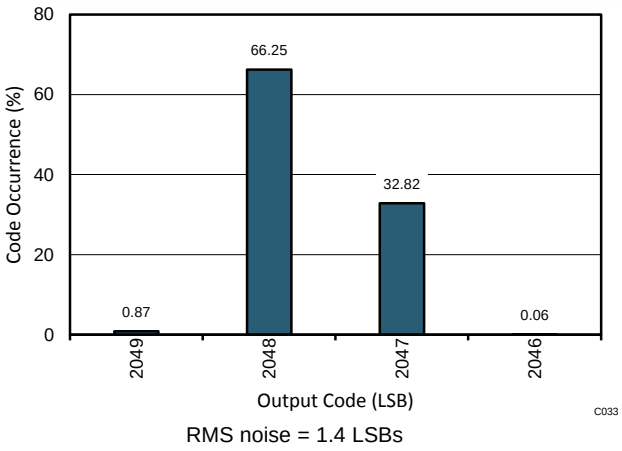

RMS noise = 1.4 LSBs

Figure 66. Idle Channel Histogram

Copyright © 2014–2015, Texas Instruments Incorporated

7.17 Typical Characteristics: ADC34J23

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

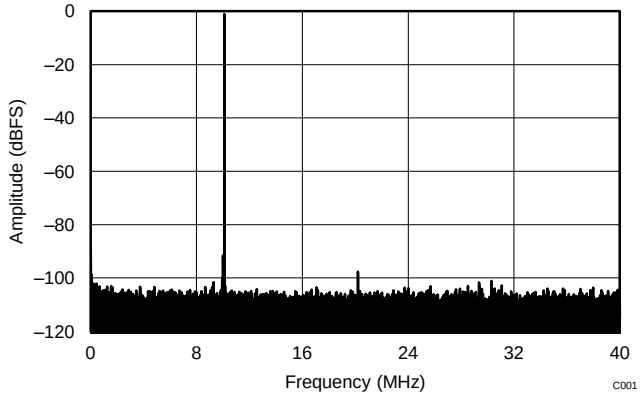

f_S = 80 MSPS, SNR = 70.3 dBFS, f_{IN} = 10 MHz, SFDR = 96.6 dBc

Figure 67. FFT for 10-MHz Input Signal (Dither On)

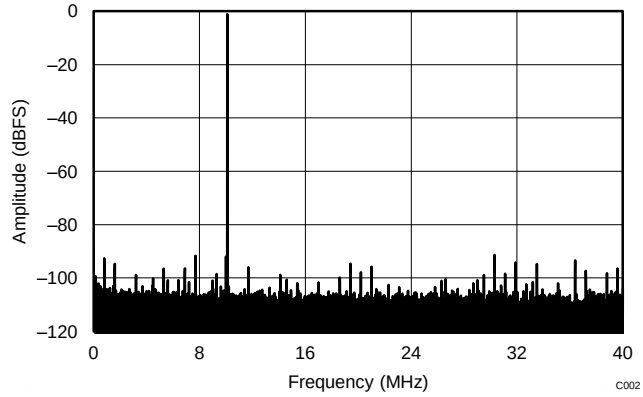

f_S = 80 MSPS, SNR = 70.6 dBFS, f_{IN} = 10 MHz, SFDR = 90.3 dBc

Figure 68. FFT for 10-MHz Input Signal (Dither Off)

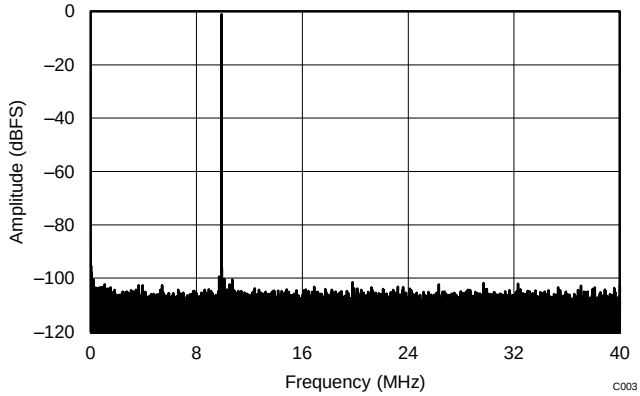

f_S = 80 MSPS, SNR = 70 dBFS, f_{IN} = 70 MHz, SFDR = 99.5 dBc

Figure 69. FFT for 70-MHz Input Signal (Dither On)

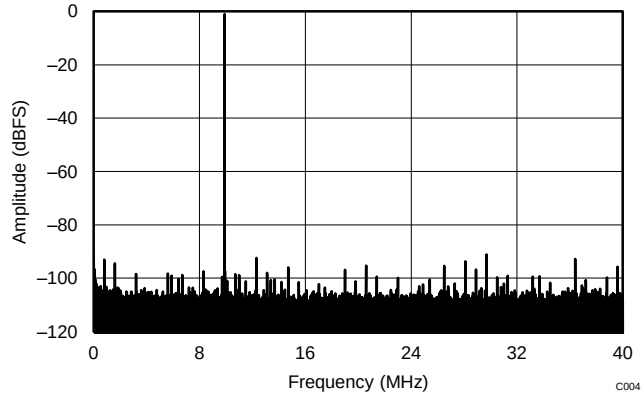

f_S = 80 MSPS, SNR = 70.4 dBFS, f_{IN} = 70 MHz, SFDR = 90.1 dBc

Figure 70. FFT for 70-MHz Input Signal (Dither Off)

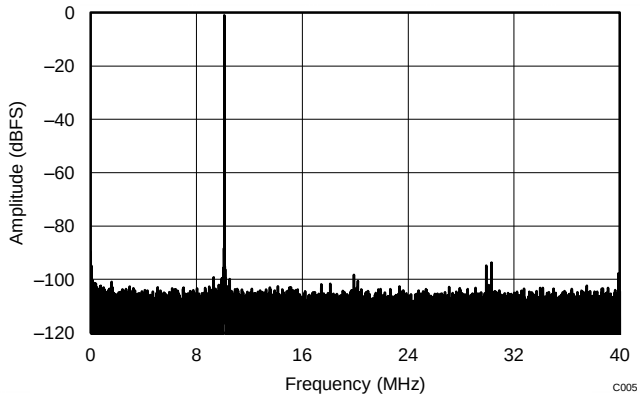

f_S = 80 MSPS, SNR = 69.3 dBFS, f_{IN} = 170 MHz, SFDR = 92.7 dBc

Figure 71. FFT for 170-MHz Input Signal (Dither On)

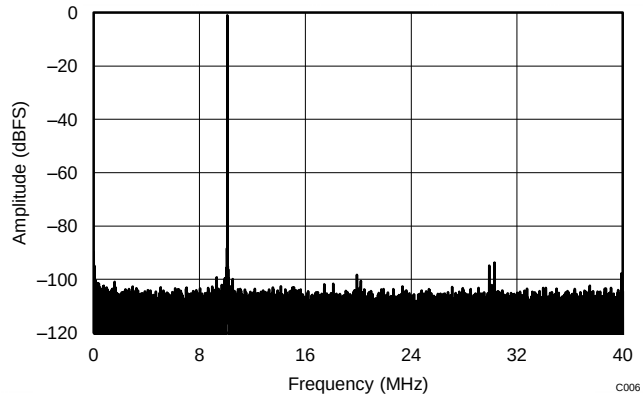

f_S = 80 MSPS, SNR = 69.6 dBFS, f_{IN} = 10 MHz, SFDR = 92.9 dBc

Figure 72. FFT for 170-MHz Input Signal (Dither Off)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J23 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

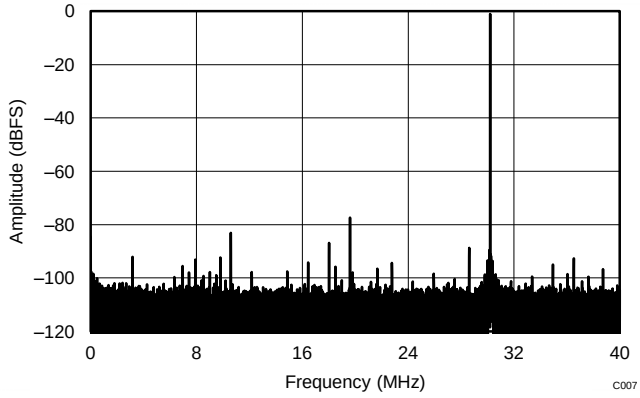

f_S = 80 MSPS, SNR = 68.4 dBFS, f_{IN} = 270 MHz, SFDR = 76.4 dBc

Figure 73. FFT for 270-MHz Input Signal (Dither On)

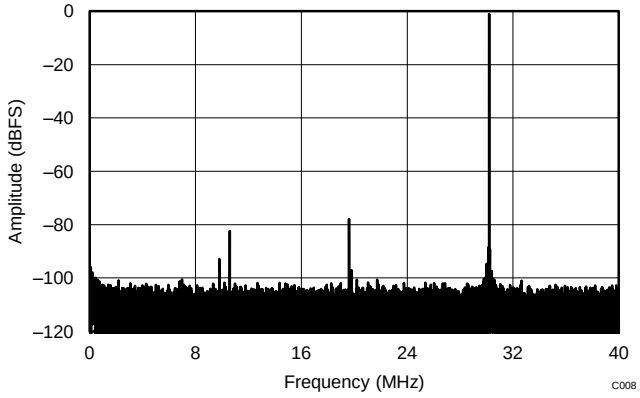

f_S = 80 MSPS, SNR = 68.3 dBFS, f_{IN} = 270 MHz, SFDR = 76.9 dBc

Figure 74. FFT for 270-MHz Input Signal (Dither Off)

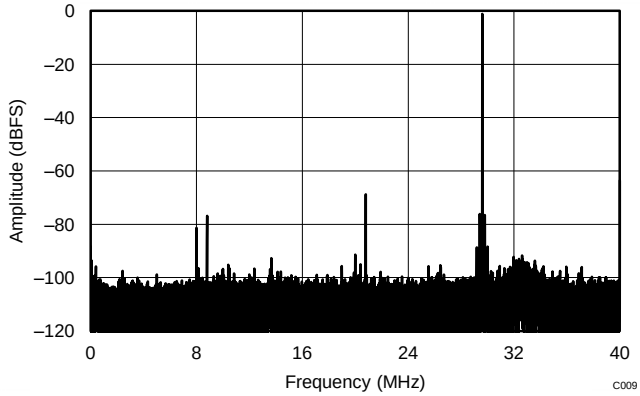

f_S = 80 MSPS, SNR = 65.5 dBFS, f_{IN} = 450 MHz, SFDR = 63.3 dBc

Figure 75. FFT for 450-MHz Input Signal (Dither On)

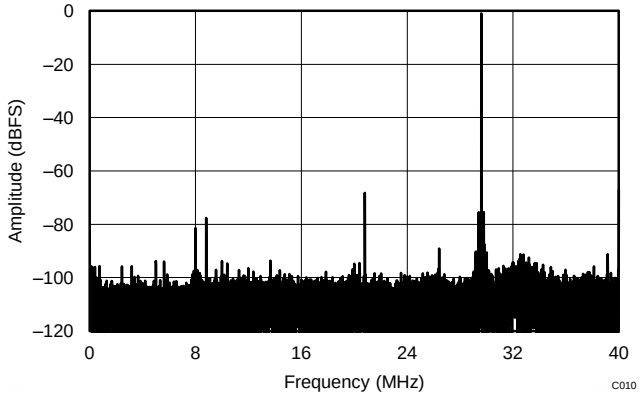

f_S = 80 MSPS, SNR = 66.2 dBFS, f_{IN} = 450 MHz, SFDR = 62.9 dBc

Figure 76. FFT for 450-MHz Input Signal (Dither Off)

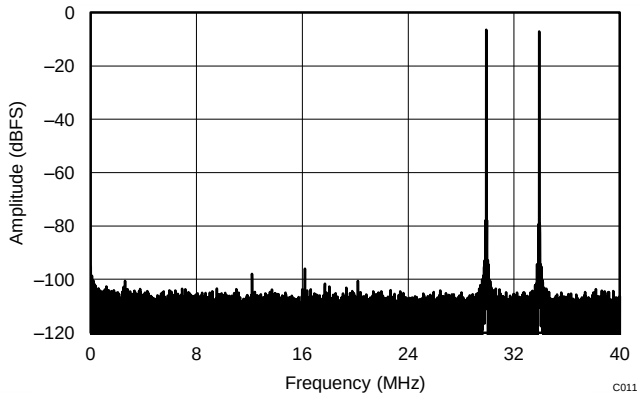

f_S = 80 MSPS, IMD = 95 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 99 dBFS

Figure 77. FFT for Two-Tone Input Signal (–7 dBFS at 46 MHz and 50 MHz)

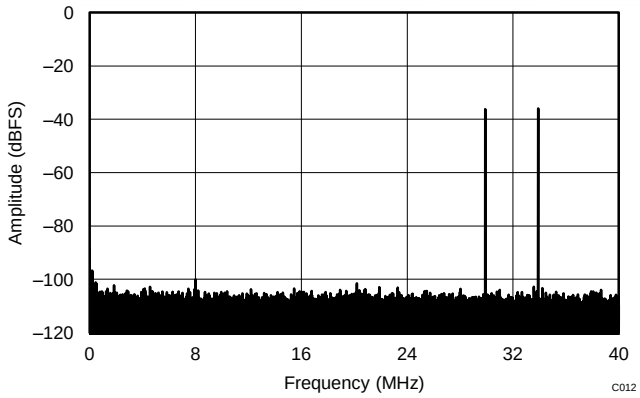

f_S = 80 MSPS, IMD = 101 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 106 dBFS

Figure 78. FFT for Two-Tone Input Signal (–36 dBFS at 46 MHz and 50 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J23 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

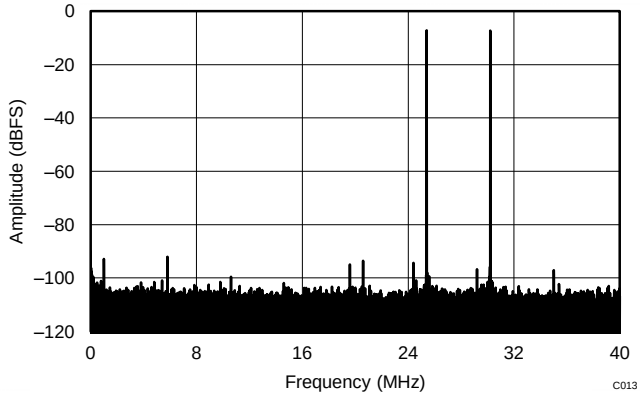

f_S = 80 MSPS, IMD = 88 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 94 dBFS

Figure 79. FFT for Two-Tone Input Signal (–7 dBFS at 185 MHz and 190 MHz)

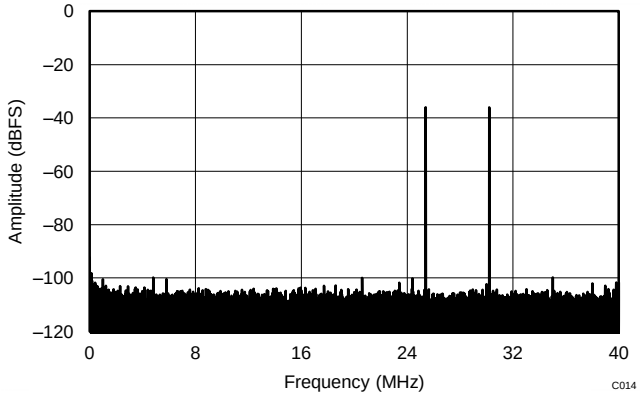

f_S = 80 MSPS, IMD = 100 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 102 dBFS

Figure 80. FFT for Two-Tone Input Signal (–36 dBFS at 185 MHz and 190 MHz)

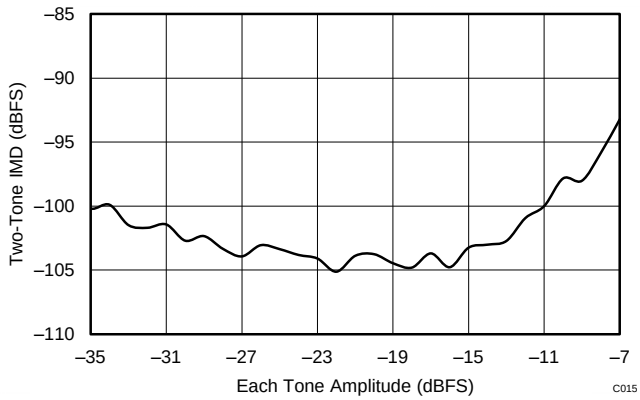

Figure 81. Intermodulation Distortion vs Input Amplitude (46 MHz and 50 MHz)

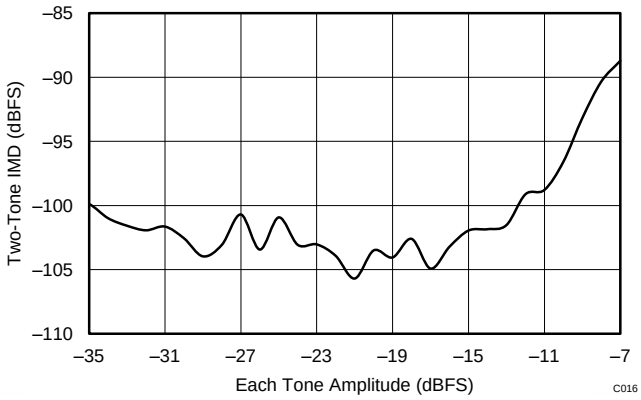

Figure 82. Intermodulation Distortion vs Input Amplitude (185 MHz and 190 MHz)

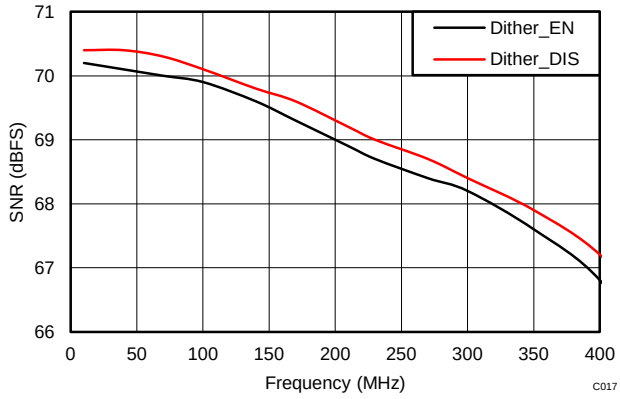

Figure 83. Signal-to-Noise Ratio vs Input Frequency

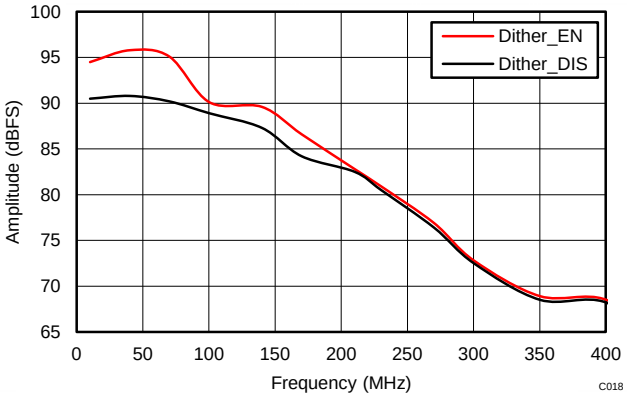

Figure 84. Spurious-Free Dynamic Range vs Input Frequency

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J23 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

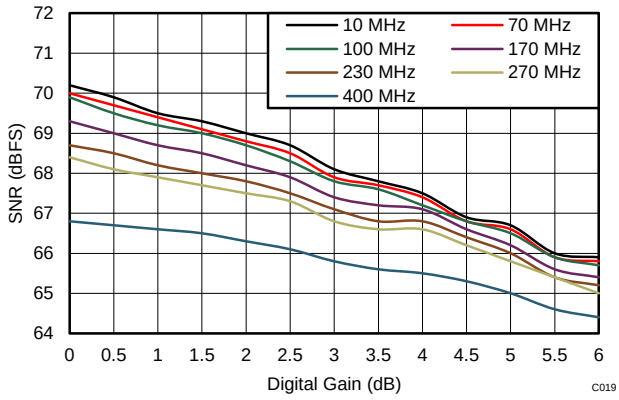

Figure 85. Signal-to-Noise Ratio vs Digital Gain and Input Frequency

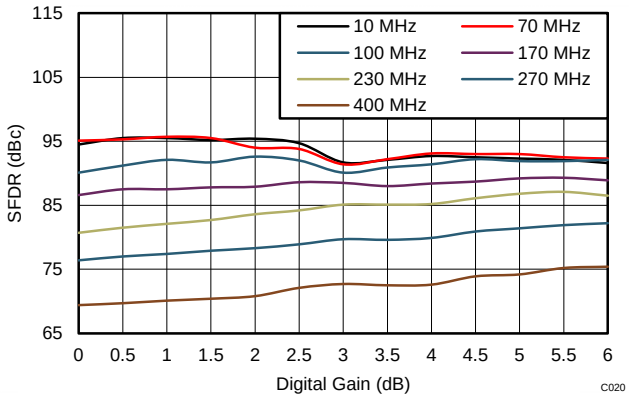

Figure 86. Spurious-Free Dynamic Range vs Digital Gain and Input Frequency

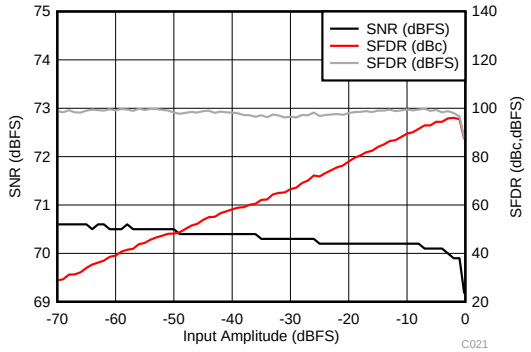

Figure 87. Performance vs Input Amplitude (30 MHz)

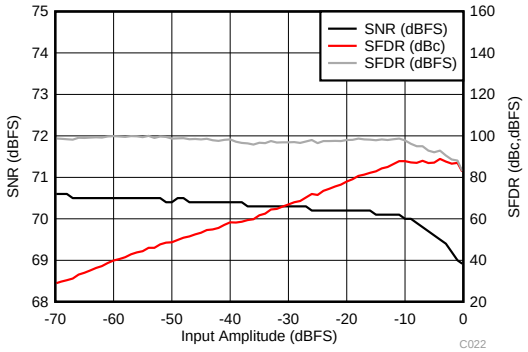

Figure 88. Performance vs Input Amplitude (170 MHz)

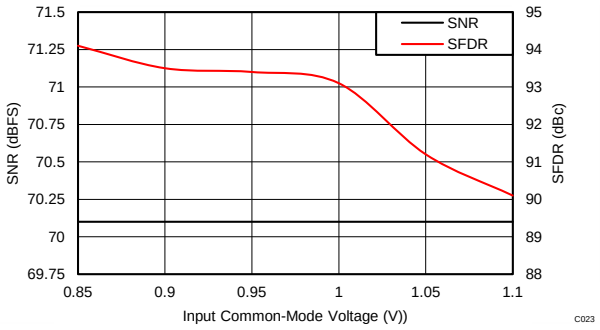

Figure 89. Performance vs Input Common-Mode Voltage (30 MHz)

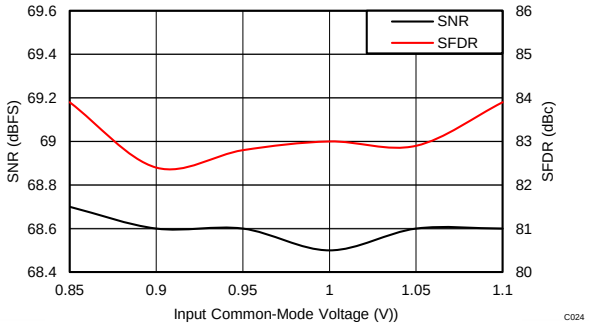

Figure 90. Performance vs Input Common-Mode Voltage (170 MHz)

Typical Characteristics: ADC34J23 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

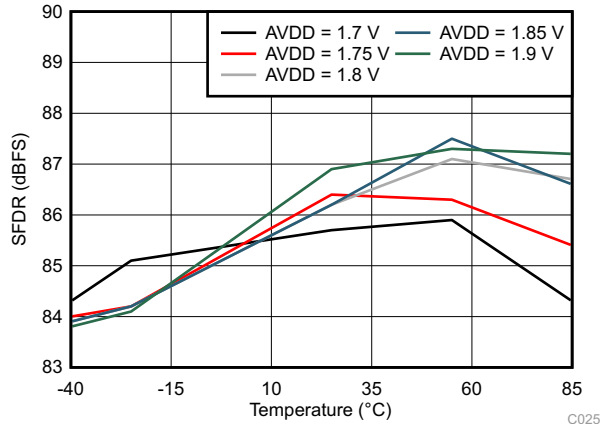

Figure 91. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

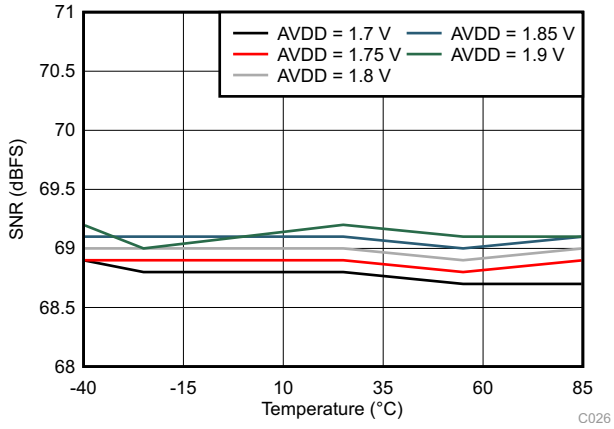

Figure 92. Signal-to-Noise Ratio vs AVDD Supply and Temperature

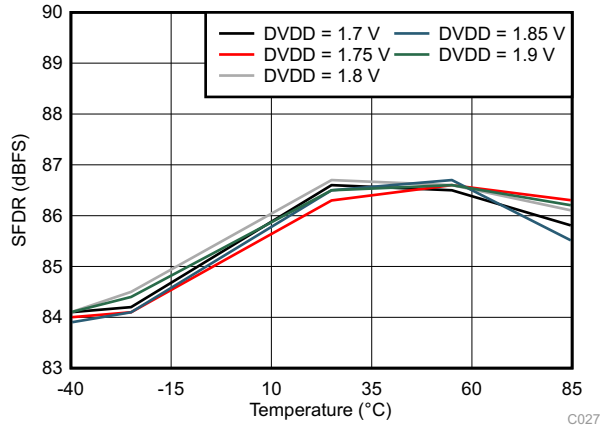

Figure 93. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

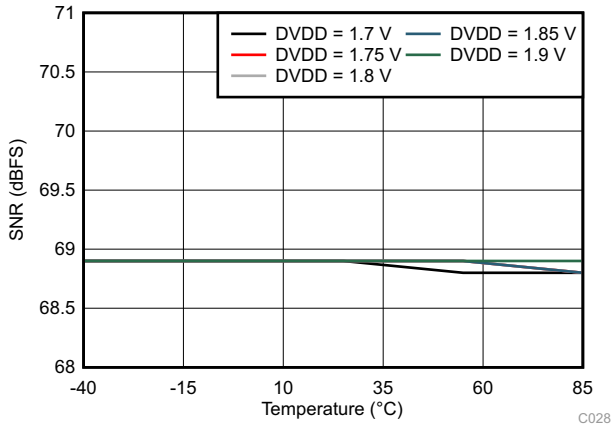

Figure 94. Signal-to-Noise Ratio vs DVDD Supply and Temperature

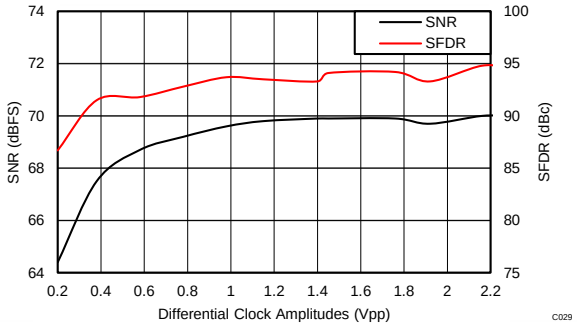

Figure 95. Performance vs Clock Amplitude (40 MHz)

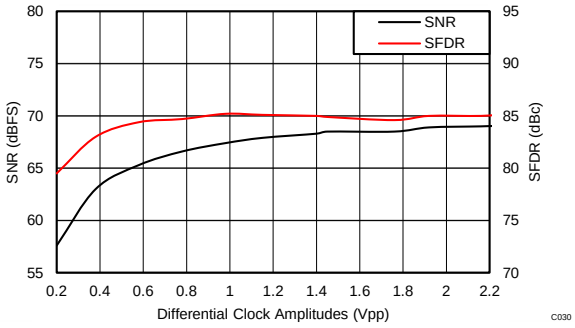

Figure 96. Performance vs Clock Amplitude (150 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J23 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

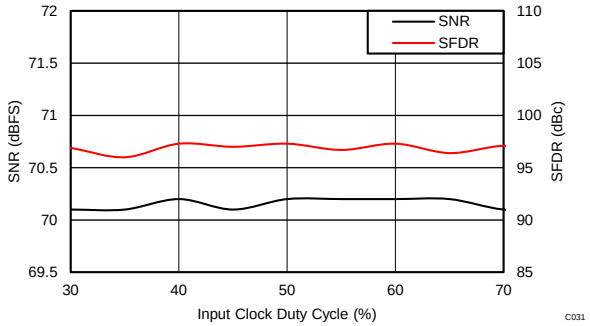

Figure 97. Performance vs Clock Duty Cycle (40 MHz)

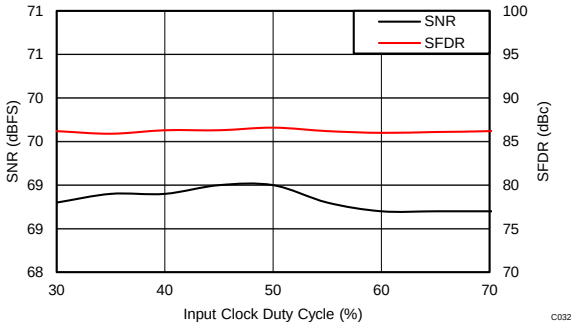

Figure 98. Performance vs Clock Duty Cycle (150 MHz)

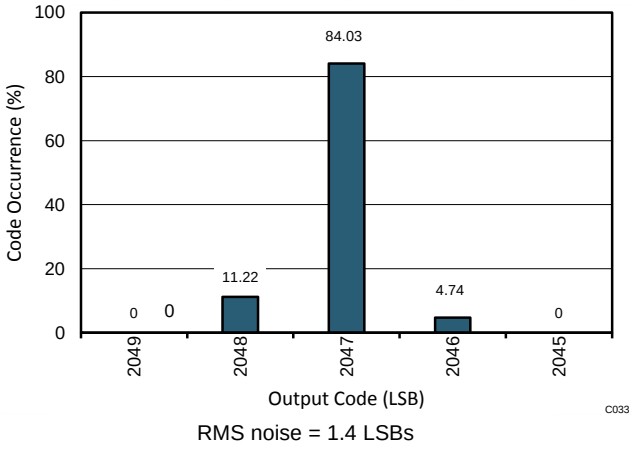

RMS noise = 1.4 LSBs

Figure 99. Idle Channel Histogram

Copyright © 2014–2015, Texas Instruments Incorporated

7.18 Typical Characteristics: ADC34J22

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

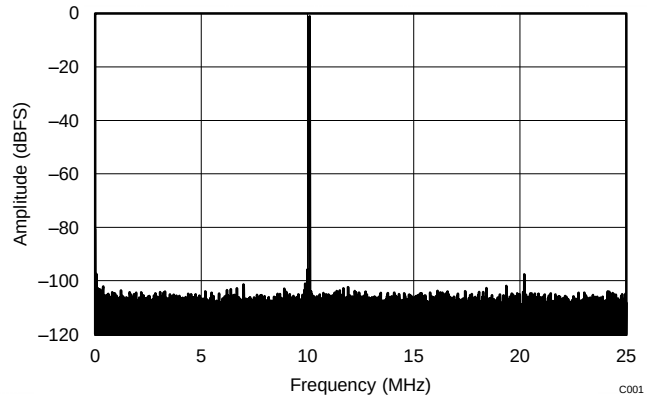

f_S = 50 MSPS, SNR = 70.2 dBFS, f_{IN} = 10 MHz, SFDR = 96.5 dBc

Figure 100. FFT for 10-MHz Input Signal (Dither On)

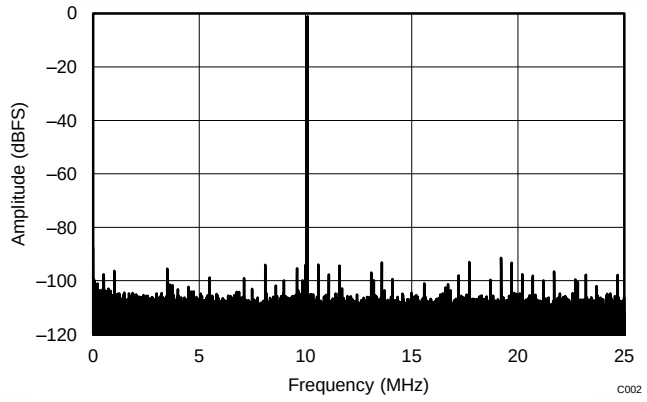

f_S = 50 MSPS, SNR = 70.6 dBFS, f_{IN} = 10 MHz, SFDR = 90.4 dBc

Figure 101. FFT for 10-MHz Input Signal (Dither Off)

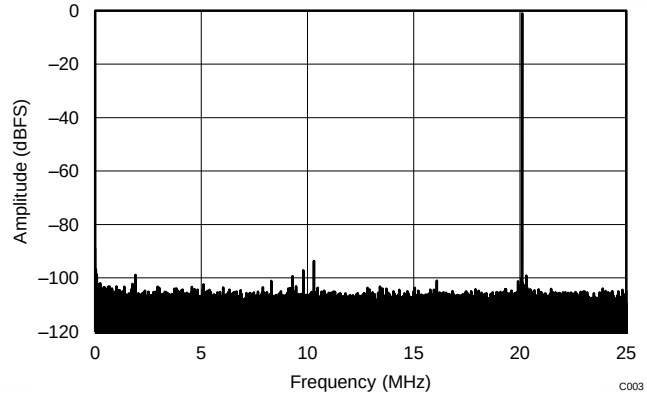

f_S = 50 MSPS, SNR = 69.9 dBFS, f_{IN} = 70 MHz, SFDR = 92.6 dBc

Figure 102. FFT for 70-MHz Input Signal (Dither On)

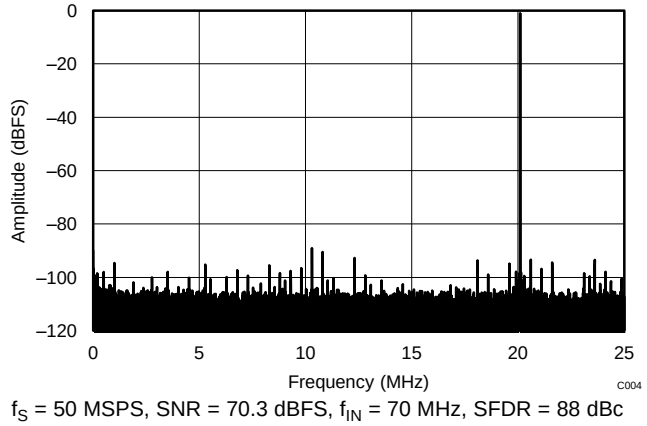

f_S = 50 MSPS, SNR = 70.3 dBFS, f_{IN} = 70 MHz, SFDR = 88 dBc

Figure 103. FFT for 70-MHz Input Signal (Dither Off)

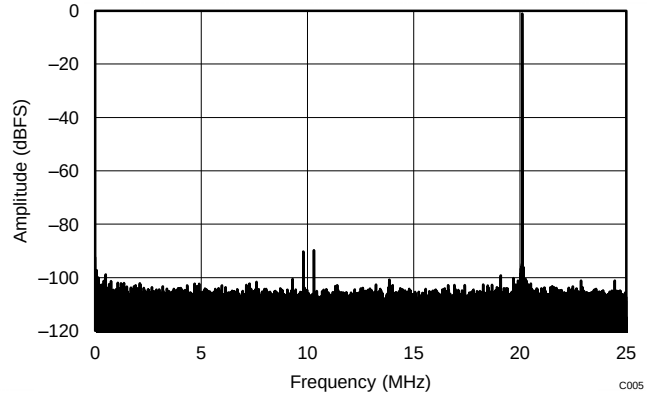

f_S = 50 MSPS, SNR = 69.3 dBFS, f_{IN} = 170 MHz, SFDR = 88.7 dBc

Figure 104. FFT for 170-MHz Input Signal (Dither On)

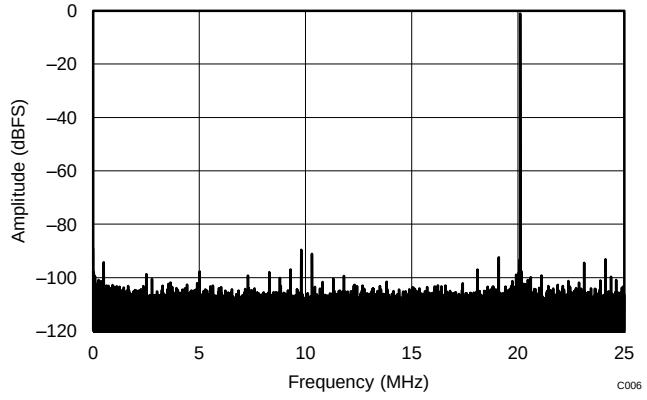

f_S = 50 MSPS, SNR = 69.5 dBFS, f_{IN} = 170 MHz, SFDR = 88.5 dBc

Figure 105. FFT for 170-MHz Input Signal (Dither Off)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J22 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

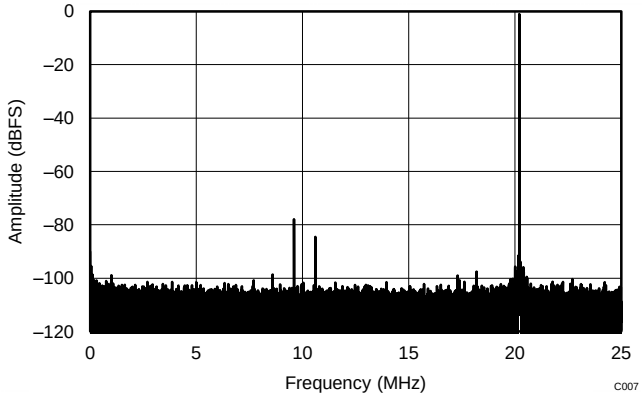

f_S = 50 MSPS, SNR = 68.3 dBFS, f_{IN} = 270 MHz, SFDR = 76.9 dBc

Figure 106. FFT for 270-MHz Input Signal (Dither On)

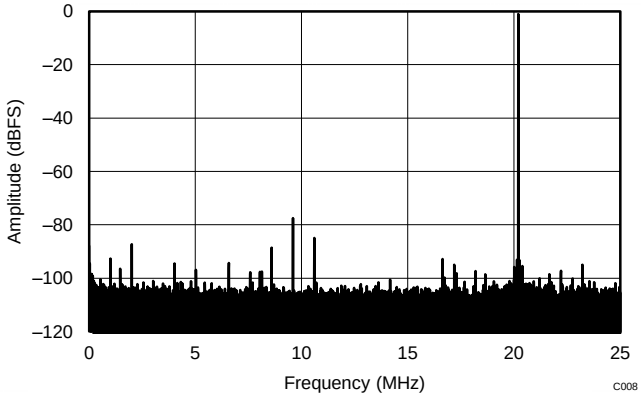

f_S = 50 MSPS, SNR = 68.4 dBFS, f_{IN} = 270 MHz, SFDR = 76.5 dBc

Figure 107. FFT for 270-MHz Input Signal (Dither Off)

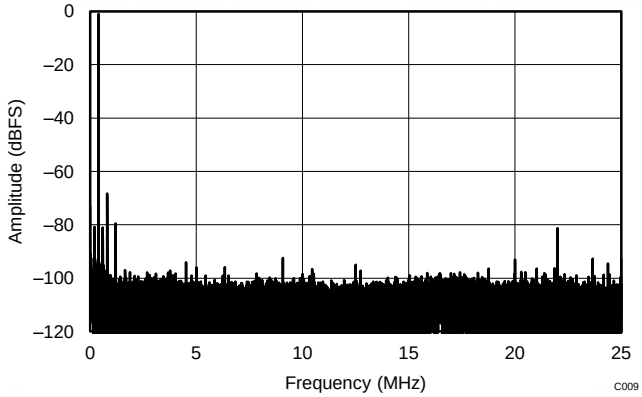

f_S = 50 MSPS, SNR = 66.1 dBFS, f_{IN} = 450 MHz, SFDR = 63.1 dBc

Figure 108. FFT for 450-MHz Input Signal (Dither On)

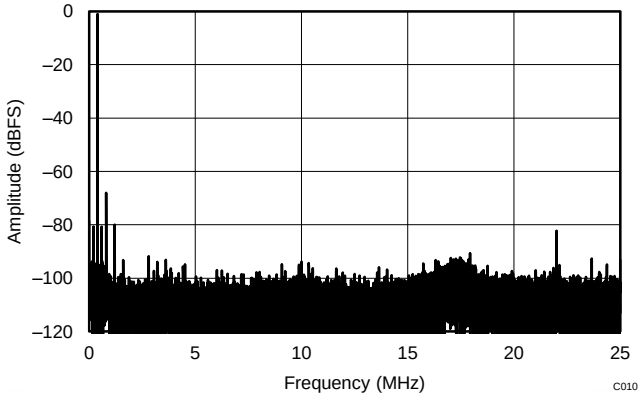

f_S = 50 MSPS, SNR = 66.3 dBFS, f_{IN} = 450 MHz, SFDR = 63.2 dBc

Figure 109. FFT for 450-MHz Input Signal (Dither Off)

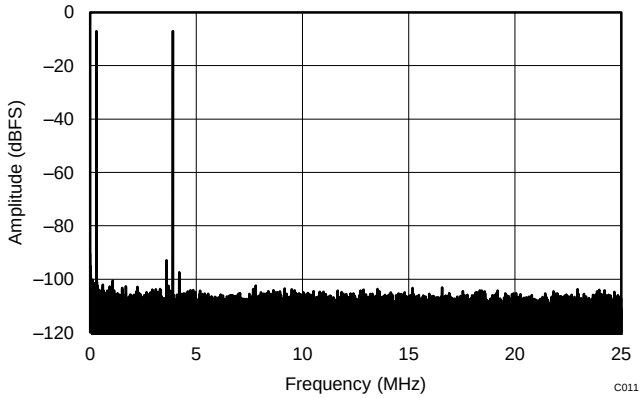

f_S = 50 MSPS, IMD = 93 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 96 dBFS

Figure 110. FFT for Two-Tone Input Signal (–7dBFS at 46 MHz and 50 MHz)

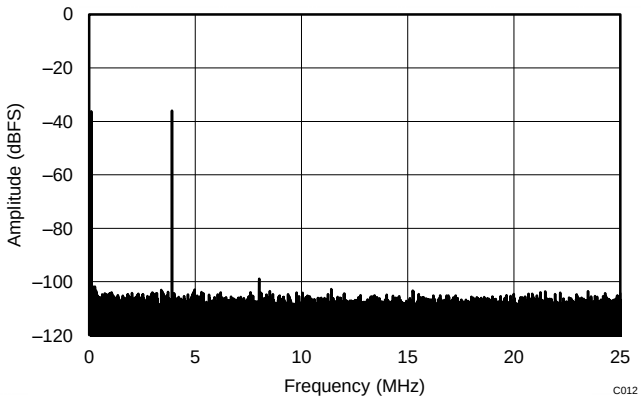

f_S = 50 MSPS, IMD = 99 dBFS, f_{IN1} = 46 MHz, f_{IN2} = 50 MHz, SFDR = 106 dBFs

Figure 111. FFT for Two-Tone Input Signal (–36 dBFS at 46 MHz and 50 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J22 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

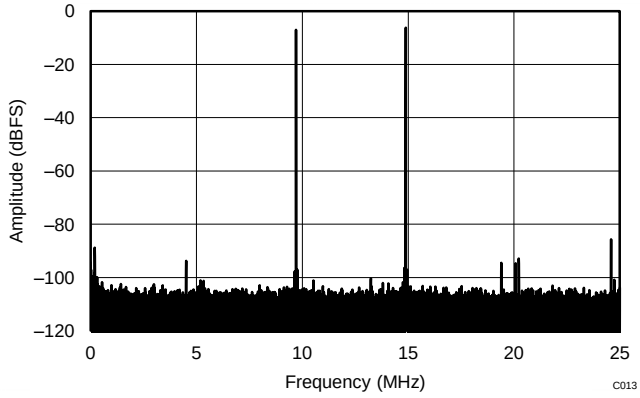

f_S = 50 MSPS, IMD = 86 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 92 dBFS

Figure 112. FFT for Two-Tone Input Signal (–7 dBFS at 185 MHz and 190 MHz)

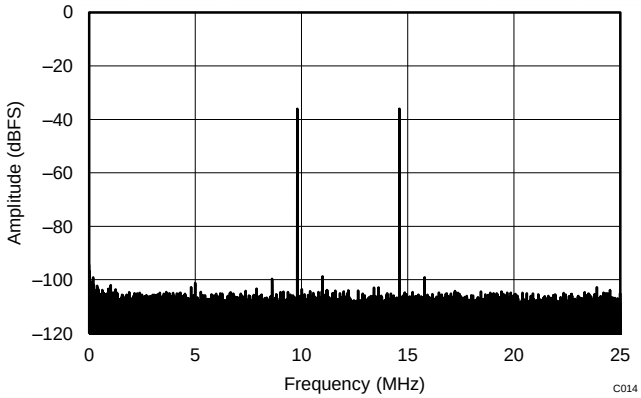

f_S = 50 MSPS, IMD = 99 dBFS, f_{IN1} = 185 MHz, f_{IN2} = 190 MHz, SFDR = 102 dBFs

Figure 113. FFT for Two-Tone Input Signal (–36 dBFS at 185 MHz and 190 MHz)

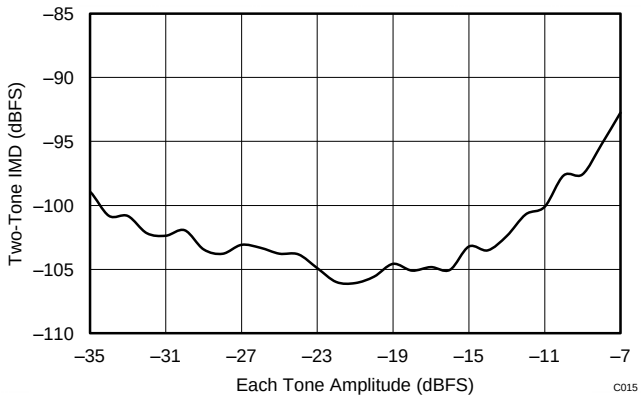

Figure 114. Intermodulation Distortion vs Input Amplitude (46 MHz and 50 MHz)

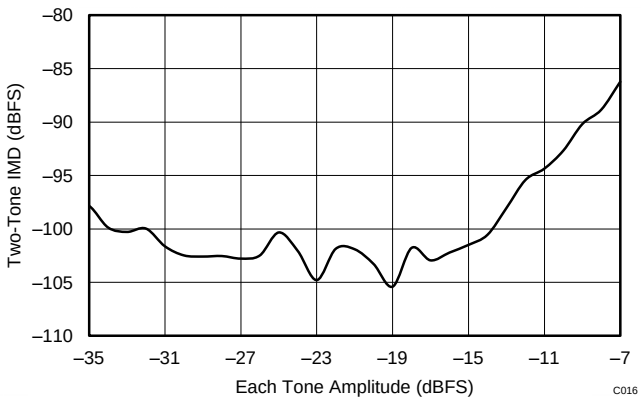

Figure 115. Intermodulation Distortion vs Input Amplitude (185 MHz and 190 MHz)

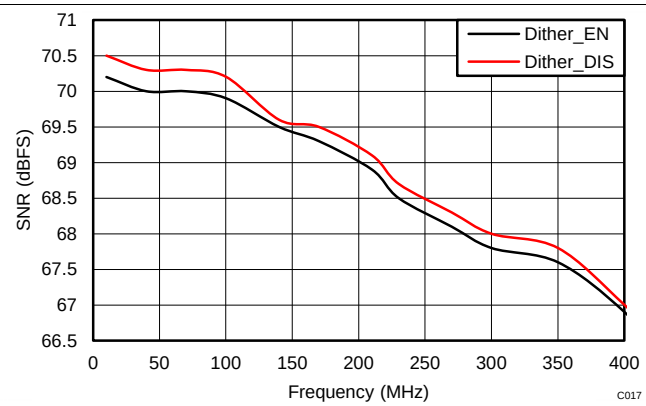

Figure 116. Signal-to-Noise Ratio vs Input Frequency

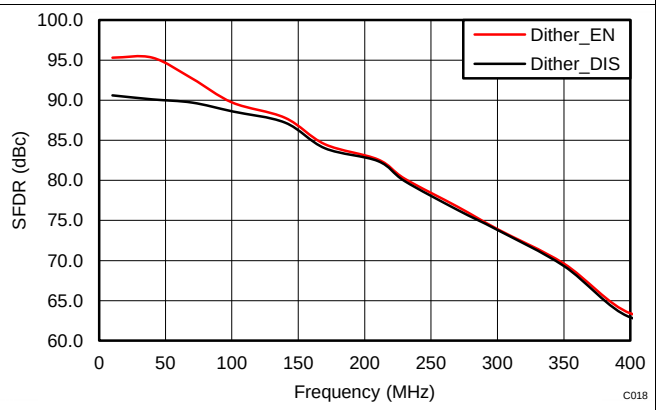

Figure 117. Spurious-Free Dynamic Range vs Input Frequency

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J22 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

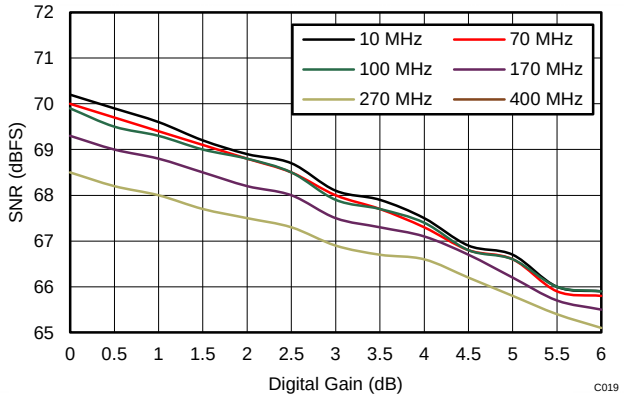

Figure 118. Signal-to-Noise Ratio vs Digital Gain and Input Frequency

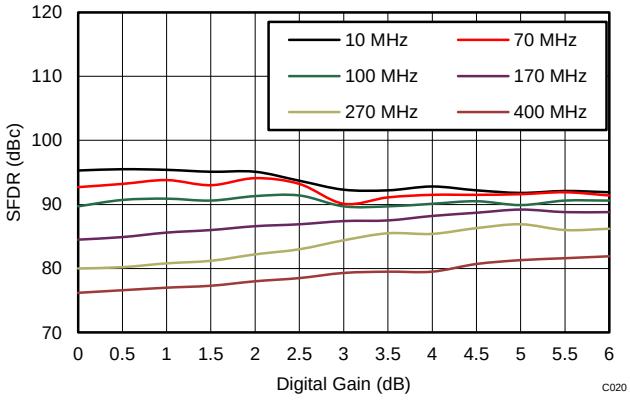

Figure 119. Spurious-Free Dynamic Range vs Digital Gain and Input Frequency

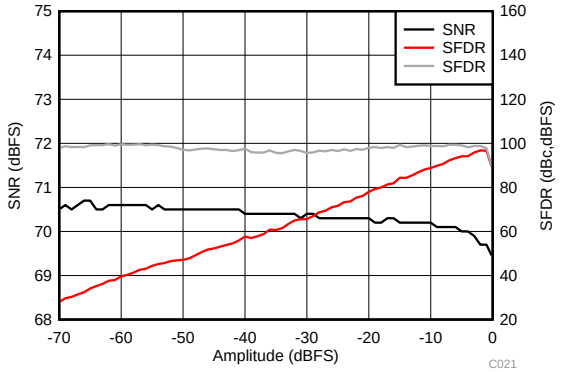

Figure 120. Performance vs Input Amplitude (30 MHz)

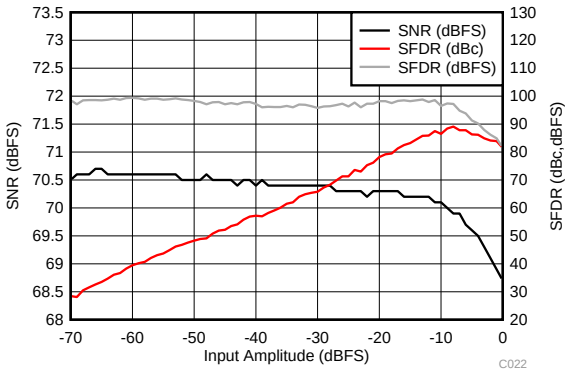

Figure 121. Performance vs Input Amplitude (170 MHz)

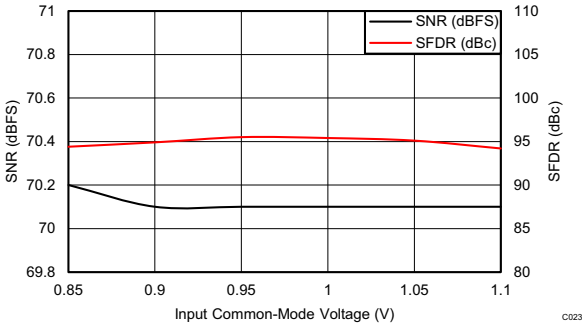

Figure 122. Performance vs Input Common-Mode Voltage (30 MHz)

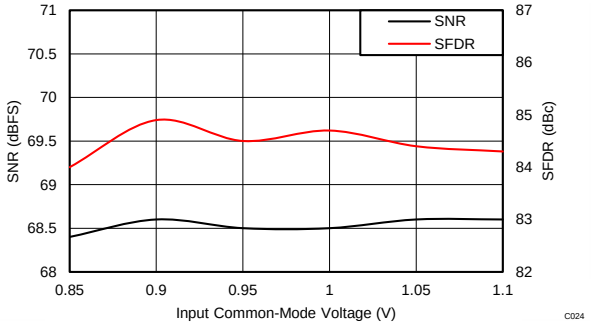

Figure 123. Performance vs Input Common-Mode Voltage (170 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J22 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

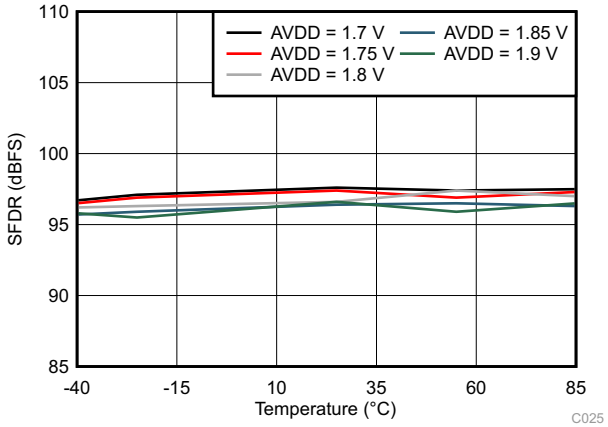

Figure 124. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

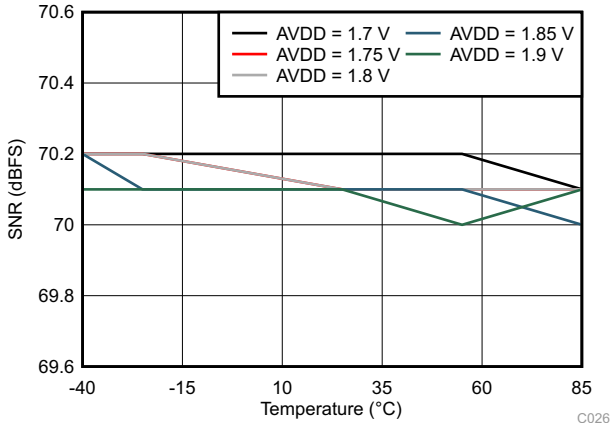

Figure 125. Signal-to-Noise Ratio vs AVDD Supply and Temperature

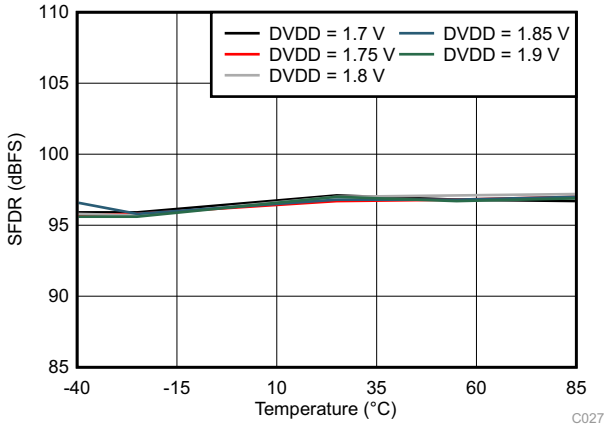

Figure 126. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

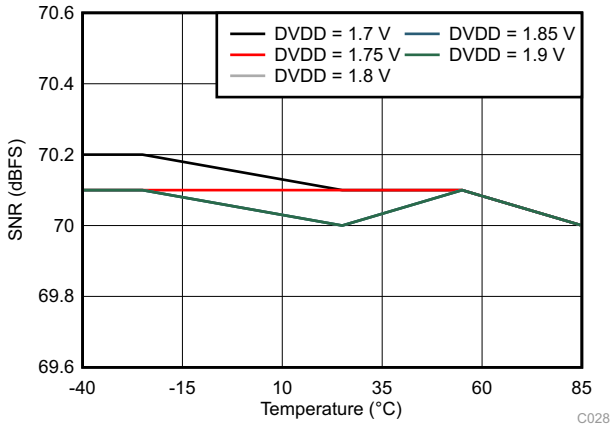

Figure 127. Signal-to-Noise Ratio vs DVDD Supply and Temperature

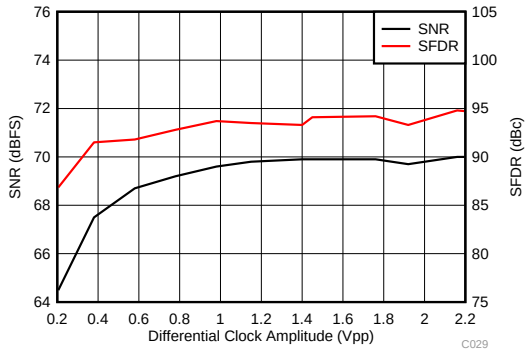

Figure 128. Performance vs Clock Amplitude (40 MHz)

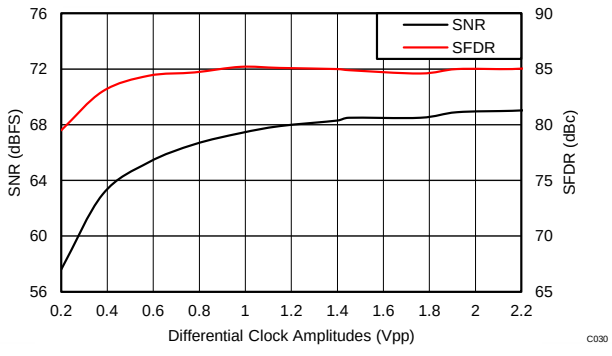

Figure 129. Performance vs Clock Amplitude (150 MHz)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: ADC34J22 (continued)

Typical values are at T_A = 25°C, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

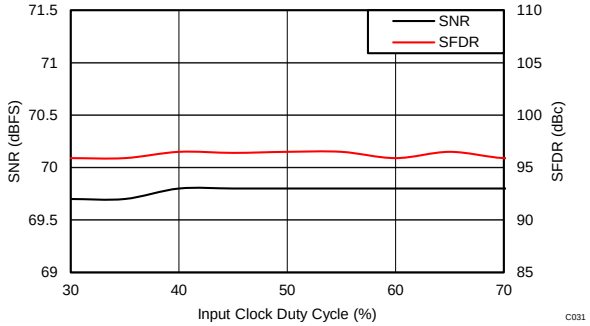

Figure 130. Performance vs Clock Duty Cycle (40 MHz)

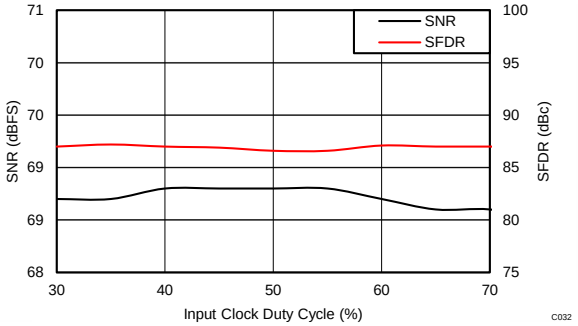

Figure 131. Performance vs Clock Duty Cycle (150 MHz)

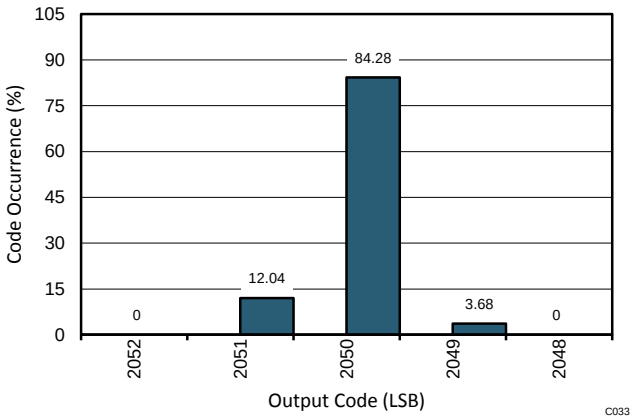

RMS noise = 1.3 LSBs

Figure 132. Idle Channel Histogram

Copyright © 2014–2015, Texas Instruments Incorporated

7.19 Typical Characteristics: Common Plots

Typical values are at T_A = 25°C, ADC sampling rate = 160 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

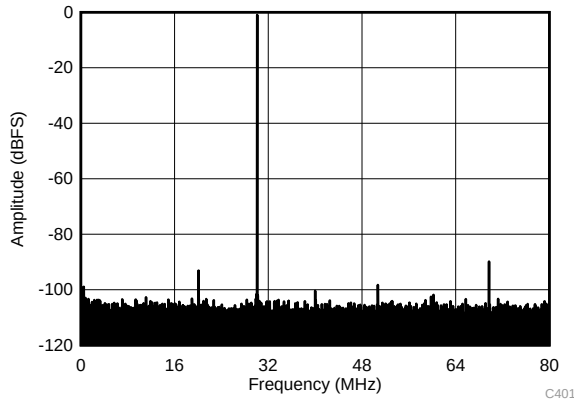

f_S = 160 MSPS, f_{CM} = 10 MHz, 50 mV_{PP}, f_{IN} = 30 MHz, Amplitude (f_{IN} + f_{CM}) = –98 dBFS, Amplitude (f_{IN} – f_{CM}) = –91 dBFS

Figure 133. Common-Mode Rejection Ratio FFT

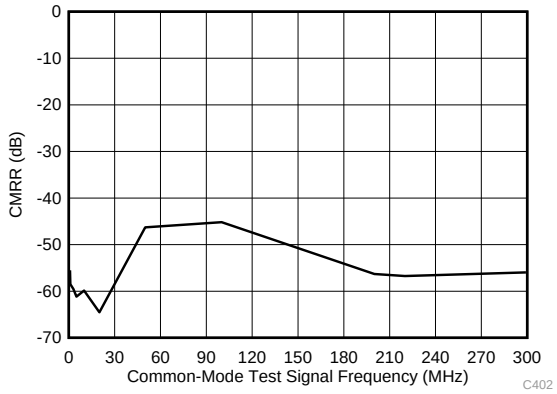

Input frequency = 30 MHz, 50-mV_{PP} signal superimposed on VCM

Figure 134. Common-Mode Rejection Ratio vs Test Signal Frequency

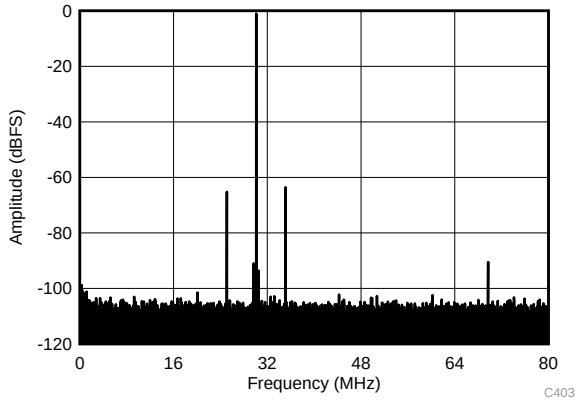

f_S = 160 MSPS, f_{PSRR} = 5 MHz, 50 mV_{PP}, f_{IN} = 30 MHz, Amplitude (f_{IN} + f_{PSRR}) = –62 dBFS, Amplitude (f_{IN} – f_{PSRR}) = –65.35 dBFS

Figure 135. Power-Supply Rejection Ratio FFT for AVDD Supply

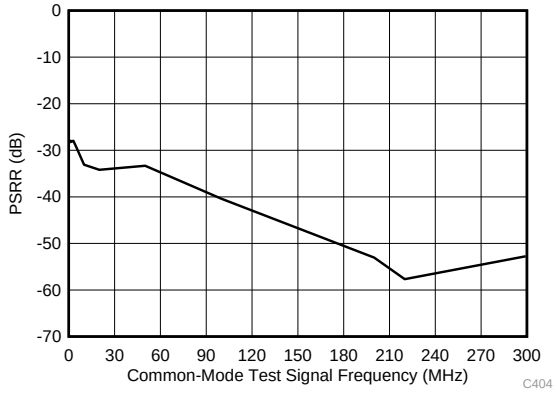

Input frequency = 30 MHz, 50-mV_{PP} signal superimposed on VCM

Figure 136. Power-Supply Rejection Ratio vs Test Signal Frequency

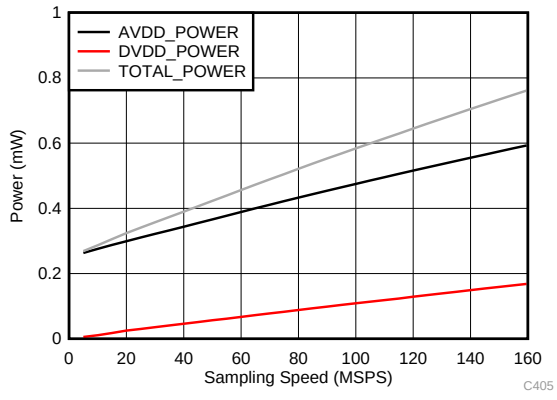

Figure 137. Power vs Sampling Frequency (20x Mode)

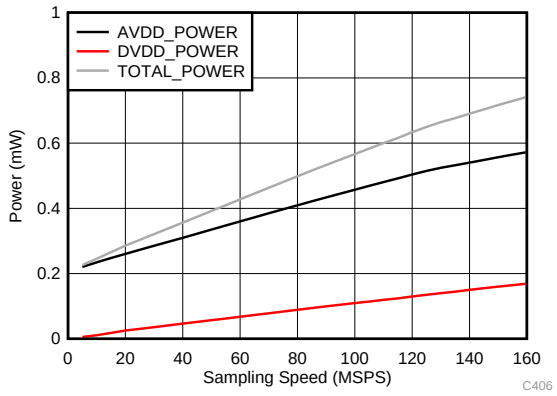

Figure 138. Power vs Sampling Frequency (40x Mode)

Copyright © 2014–2015, Texas Instruments Incorporated

7.20 Typical Characteristics: Contour Plots

Typical values are at T_A = 25°C, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

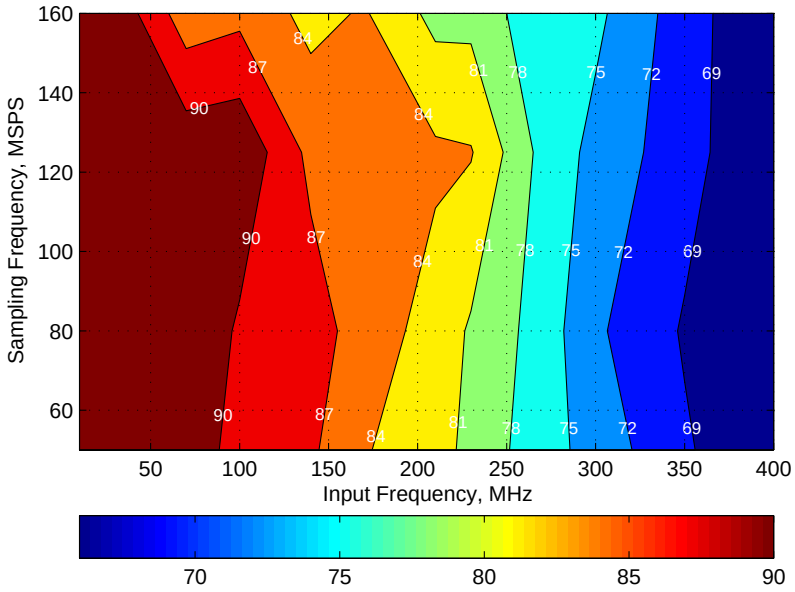

Figure 139. Spurious-Free Dynamic Range (SFDR) for 0-dB Gain

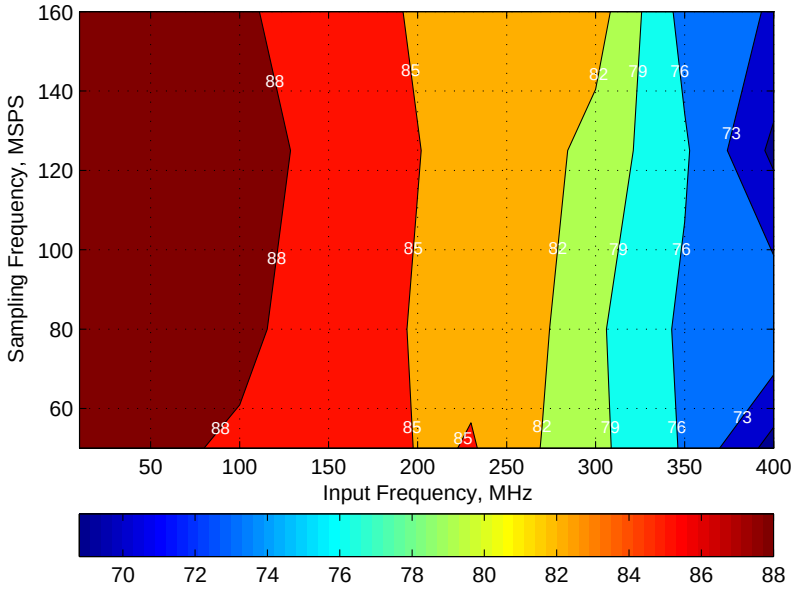

Figure 140. Spurious-Free Dynamic Range (SFDR) for 6-dB Gain

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Characteristics: Contour Plots (continued)

Typical values are at T_A = 25°C, 50% clock duty cycle, AVDD = DVDD = 1.8 V, –1-dBFS differential input, 2-V_{PP} full-scale, and 32k-point FFT, unless otherwise noted.

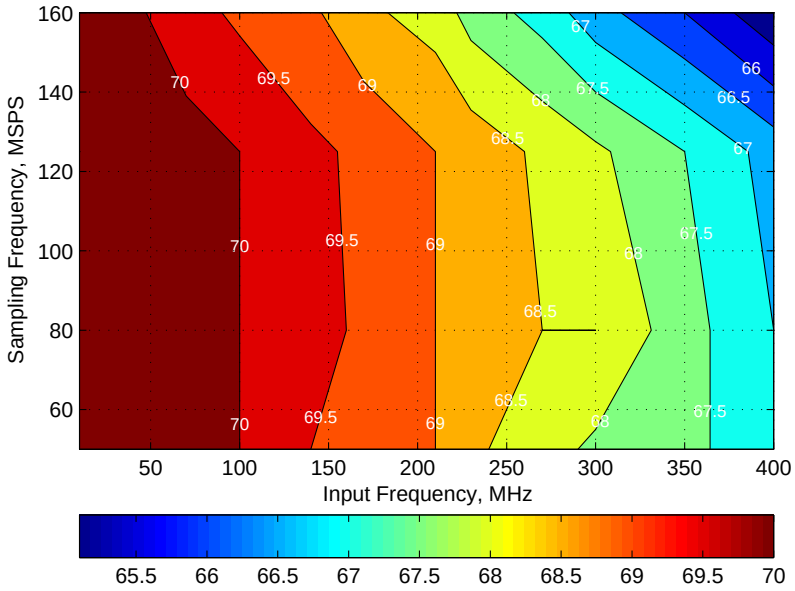

Figure 141. Signal-to-Noise Ratio (SNR) for 0-dB Gain

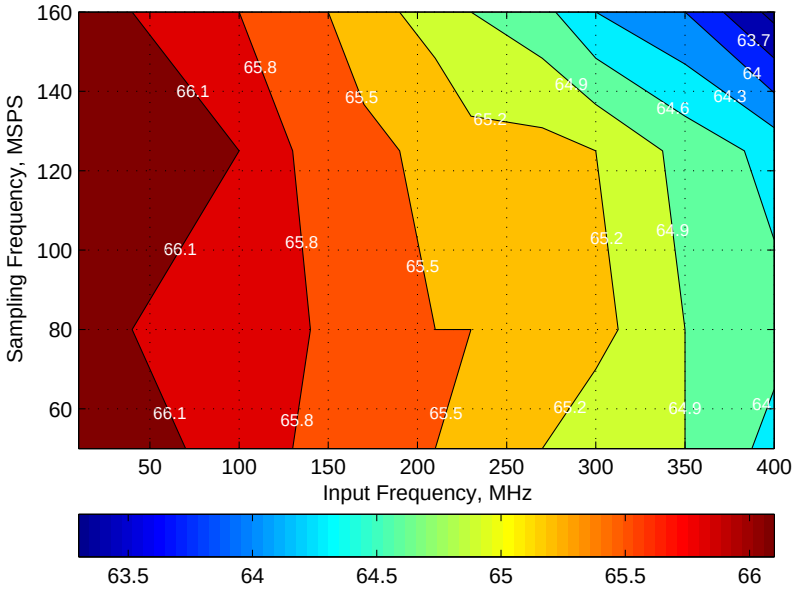

Figure 142. Signal-to-Noise Ratio (SNR) for 6-dB Gain

Copyright © 2014–2015, Texas Instruments Incorporated

8 Parameter Measurement Information

8.1 Timing Diagrams

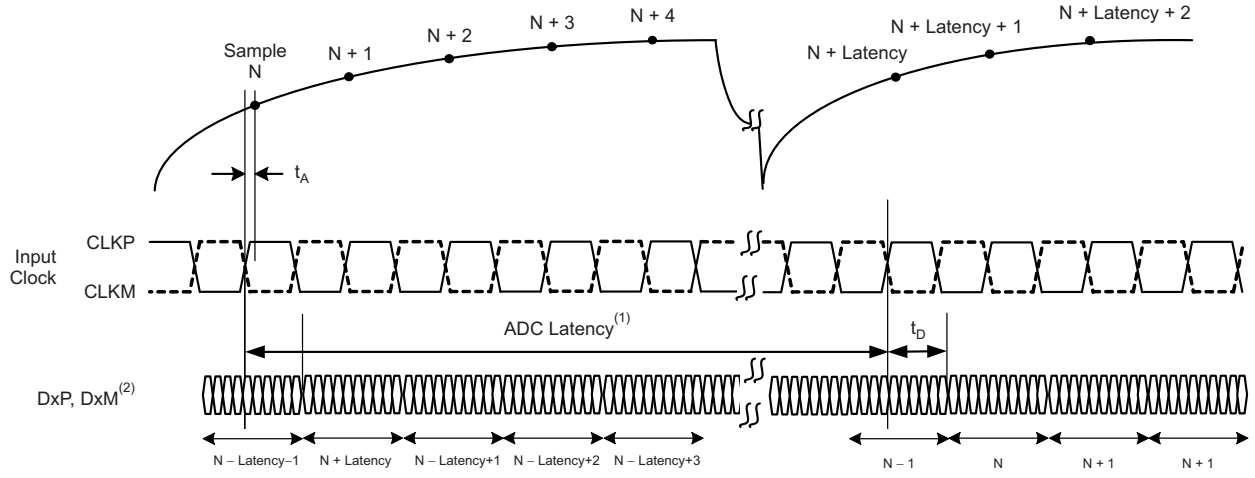

(1) Overall latency = ADC latency + t_D.

(2) x = A for channel A and B for channel B.

Figure 143. ADC Latency

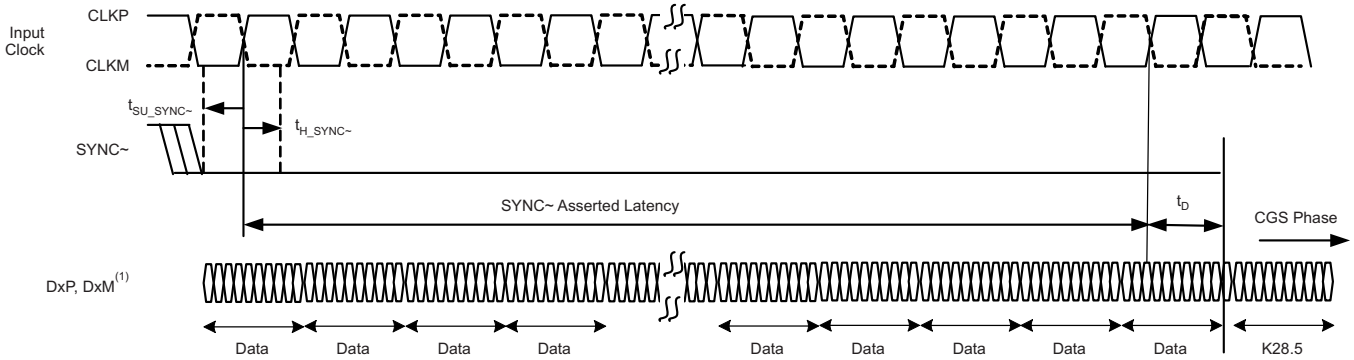

(1) x = A for channel A, B for channel B, C for channel C, and D for channel D.

Figure 144. SYNC~ Latency in CGS Phase (Two-Lane Mode)

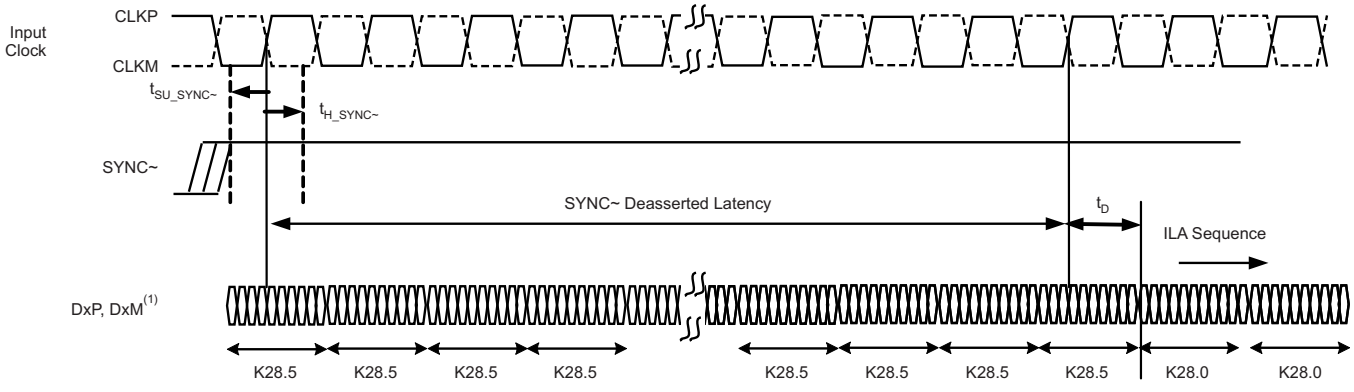

(1) x = A for channel A, B for channel B, C for channel C, and D for channel D.

Figure 145. SYNC~ Latency in ILAS Phase (Two-Lane Mode)

Copyright © 2014–2015, Texas Instruments Incorporated

Timing Diagrams (continued)

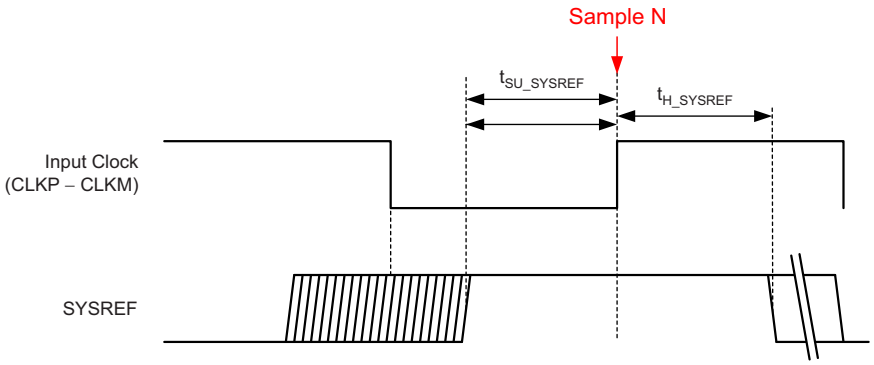

Figure 146. SYSREF Timing (Subclass 1)

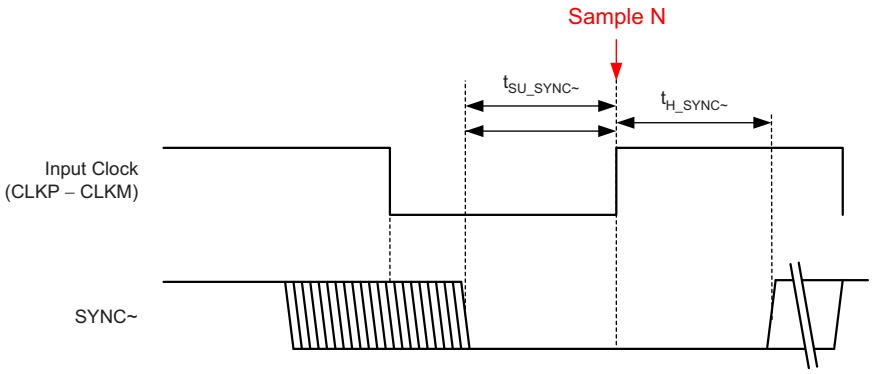

Figure 147. SYNC~ Timing (Subclass 2)

Copyright © 2014–2015, Texas Instruments Incorporated

9 Detailed Description

9.1 Overview

The ADC34J2x are a high-linearity, ultra-low power, dual-channel, 12-bit, 50-MSPS to 160-MSPS, analog-to-digital converter (ADC) family. The devices are designed specifically to support demanding, high input frequency signals with large dynamic range requirements. A clock input divider allows more flexibility for system clock architecture design while the SYSREF input enables complete system synchronization. The ADC34J2x family supports JESD204B interface in order to reduce the number of interface lines, thus allowing for high system integration density. The JESD204B interface is a serial interface, where the data of each ADC are serialized and output over only one differential pair. An internal phase-locked loop (PLL) multiplies the incoming ADC sampling clock by 20 to derive the bit clock, which is used to serialize the 12-bit data from each channel. The ADC34J2x devices support subclass 1 with interface data rates up to 3.2 Gbps.

9.2 Functional Block Diagram

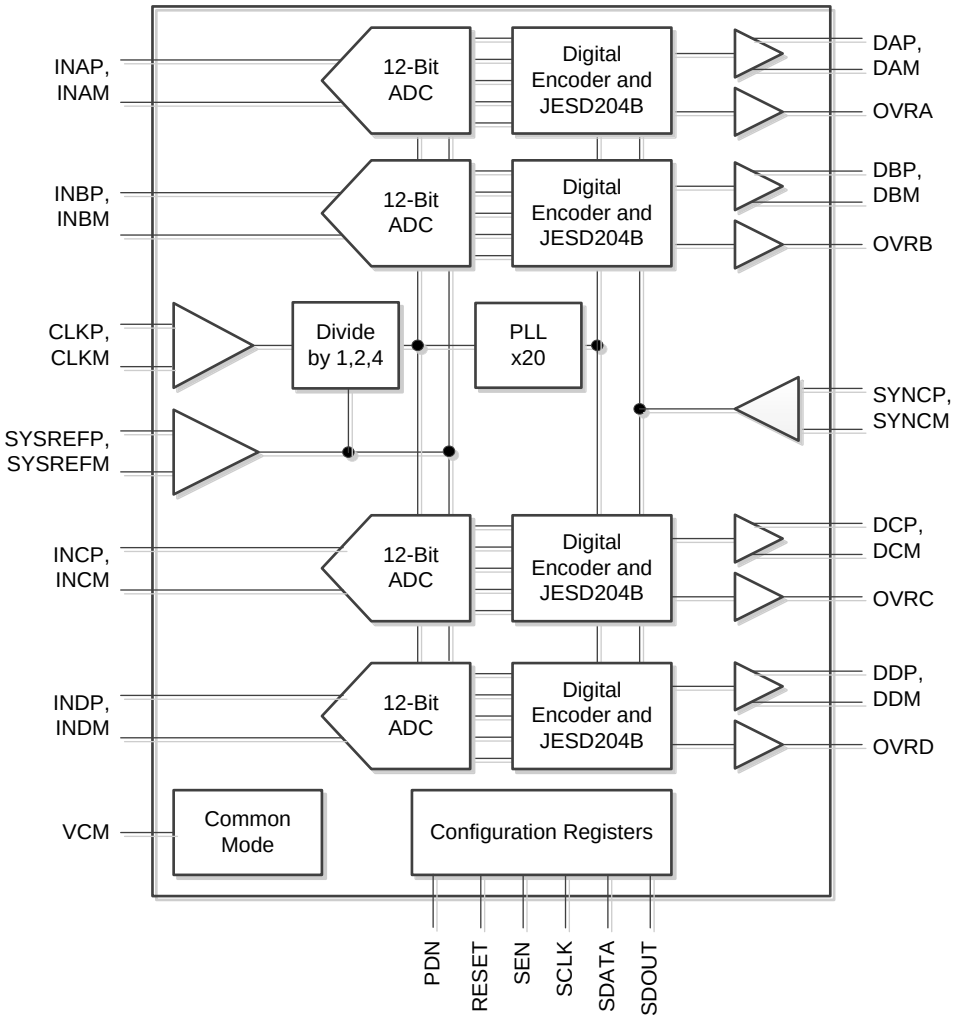

9.3 Feature Description

9.3.1 Analog Inputs

The ADC34J2x analog signal inputs are designed to be driven differentially. Each input pin (INP, INM) must swing symmetrically between (VCM + 0.5 V) and (VCM – 0.5 V), resulting in a 2-V_{PP} (default) differential input swing. The input sampling circuit has a 3-dB bandwidth that extends up to 450 MHz (50-Ω source driving 50-Ω termination between INP and INM).

9.3.2 Clock Input

The device clock inputs can be driven differentially (sine, LVPECL, or LVDS) or single-ended (LVCMOS), with little or no difference in performance between them. The common-mode voltage of the clock inputs is set to 1.4 V using internal 5-kΩ resistors. The self-bias clock inputs of the ADC34J2x can be driven by the transformer-coupled, sine-wave clock source or by the ac-coupled, LVPECL and LVDS clock sources, as shown in Figure 148, Figure 149, and Figure 150. See Figure 151 for details regarding the internal clock buffer.

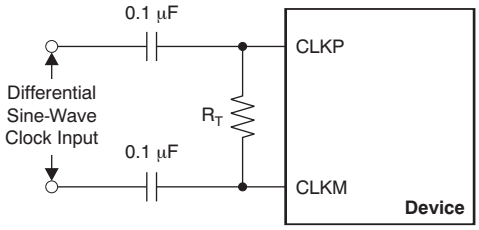

NOTE: R_T = termination resistor, if necessary.

Figure 148. Differential Sine-Wave Clock Driving Circuit

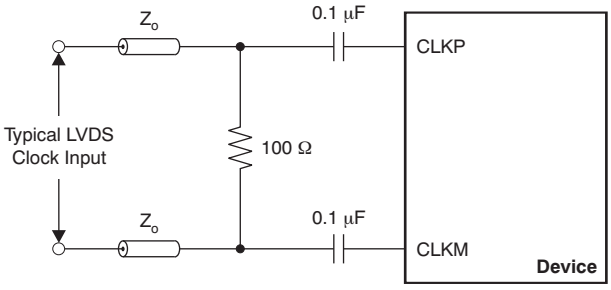

Figure 149. LVDS Clock Driving Circuit

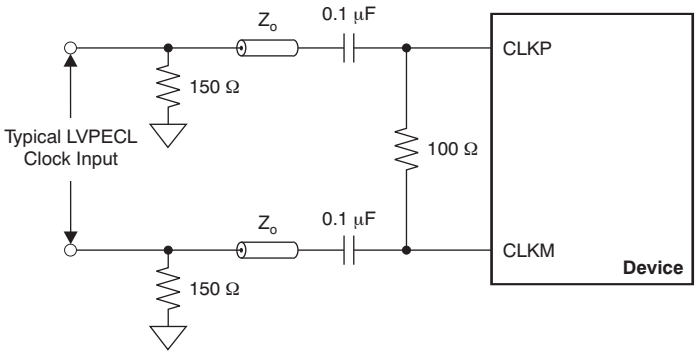

Figure 150. LVPECL Clock Driving Circuit

Copyright © 2014–2015, Texas Instruments Incorporated

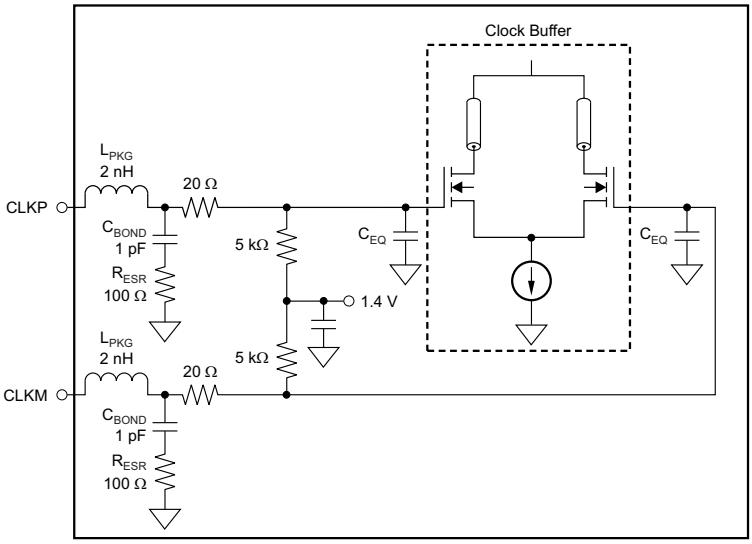

NOTE: C_{EQ} is 1 pF to 3 pF and is the equivalent input capacitance of the clock buffer.

Figure 151. Internal Clock Buffer

A single-ended CMOS clock can be ac-coupled to the CLKP input, with CLKM connected to ground with a 0.1-µF capacitor, as shown in Figure 152. However, for best performance the clock inputs must be driven differentially, thereby reducing susceptibility to common-mode noise. For high input frequency sampling, TI recommends using a clock source with very low jitter. Band-pass filtering of the clock source can help reduce the effects of jitter. There is no change in performance with a non-50% duty cycle clock input.

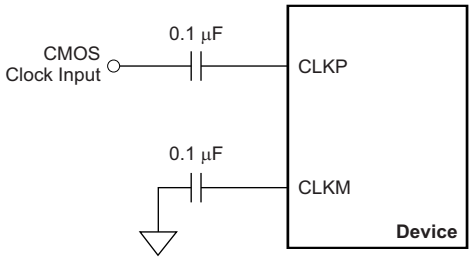

Figure 152. Single-Ended Clock Driving Circuit

9.3.2.1 SNR and Clock Jitter

The signal-to-noise ratio of the ADC is limited by three different factors: quantization noise, thermal noise, and jitter noise, as shown in Equation 1. Quantization noise is typically not noticeable in pipeline converters and is 74 dBFS for a 12-bit ADC.. Thermal noise limits SNR at low input frequencies while the clock jitter sets SNR for higher input frequencies.

$$SNR_{ADC}[dBc] = -20 \cdot \log \sqrt{\left(10^{-\frac{SNR_{Quantizatoin\ Noise}}{20}}\right)^2 + \left(10^{-\frac{SNR_{Thermal\ Noise}}{20}}\right)^2 + \left(10^{-\frac{SNR_{Jitter}}{20}}\right)^2} \quad (1)$$

The SNR limitation resulting from sample clock jitter can be calculated with Equation 2:

$$SNR_{Jitter}[dBc] = -20 \cdot \log(2\pi \cdot f_{in} \cdot T_{Jitter}) \quad (2)$$

The total clock jitter (T_{Jitter}) has two components: the internal aperture jitter (200 fs for the device) which is set by the noise of the clock input buffer and the external clock. T_{Jitter} can be calculated with Equation 3:

$$T_{Jitter} = \sqrt{(T_{Jitter,Ext.Clock_Input})^2 + (T_{Aperture_ADC})^2} \quad (3)$$

Copyright © 2014–2015, Texas Instruments Incorporated

External clock jitter can be minimized by using high-quality clock sources and jitter cleaners as well as band-pass filters at the clock input while a faster clock slew rate improves the ADC aperture jitter. The devices have a thermal noise of 73.5 dBFS and internal aperture jitter of 200 fs. The SNR, depending on the amount of external jitter for different input frequencies, is shown in Figure 153.

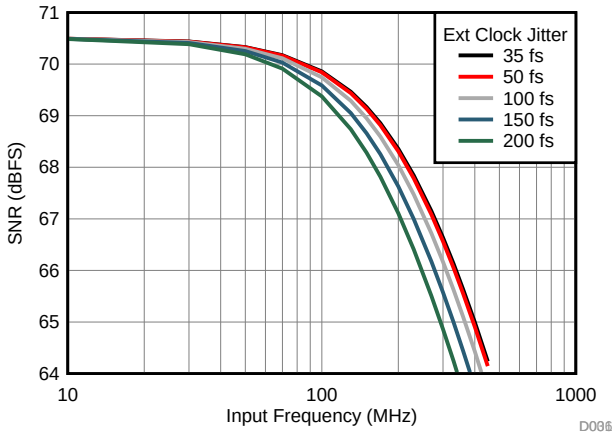

Figure 153. SNR vs Frequency vs Jitter

9.3.2.2 Input Clock Divider

The devices are equipped with an internal divider on the clock input. The divider allows operation with a faster input clock, thus simplifying the system clock distribution design. The clock divider can be bypassed (divide-by-1) for operation with a 160-MHz clock while the divide-by-2 option supports a maximum input clock of 320 MHz and the divide-by-4 option supports a maximum input clock frequency of 640 MHz.

9.3.3 Power-Down Control

The power-down functions of the ADC34J2x can be controlled either through the parallel control pin (PDN) or through an SPI register setting (see Figure 181, register 15h). The PDN pin can also be configured via SPI to a global power-down or standby functionality.

Table 3. Power-Down Modes

FUNCTION	POWER CONSUMPTION (mW)	WAKE-UP TIME (µs)
Global power-down	5	85
Standby	185	35

Copyright © 2014–2015, Texas Instruments Incorporated

9.3.4 Internal Dither Algorithm

The ADC34J2x uses an internal dither algorithm to achieve high SFDR and a clean spectrum. However, the dither algorithm marginally degrades SNR, creating a trade-off between SNR and SFDR. If desired, the dither algorithm can be turned off by using the DIS DITH CHx registers bits. Figure 154 and Figure 155 show the effect of using dither algorithms.

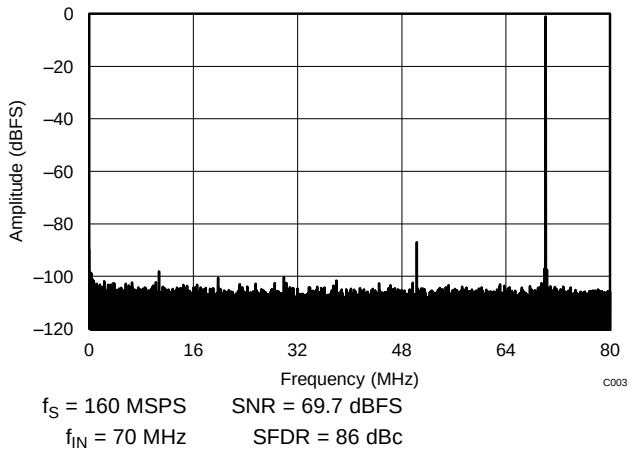

Figure 154. FFT with Dither On

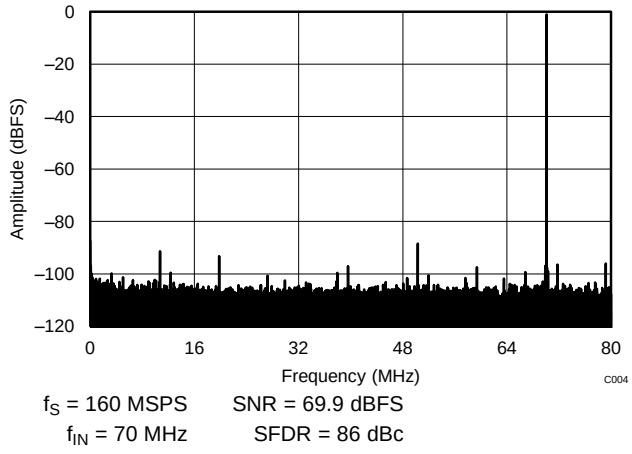

Figure 155. FFT with Dither Off

9.3.5 JESD204B Interface

The ADC34J2x support device subclass 0, 1, and 2 with a maximum output data rate of 3.2 Gbps for each serial transmitter, as shown in Figure 156. The data of each ADC are serialized by 20x using an internal PLL and then transmitted out on one differential pair each. An external SYSREF (subclass 1) or SYNC (subclass 2) signal is used to align all internal clock phases and the local multiframe clock to a specific sampling clock edge. This process allows synchronization of multiple devices in a system and minimizes timing and alignment uncertainty.

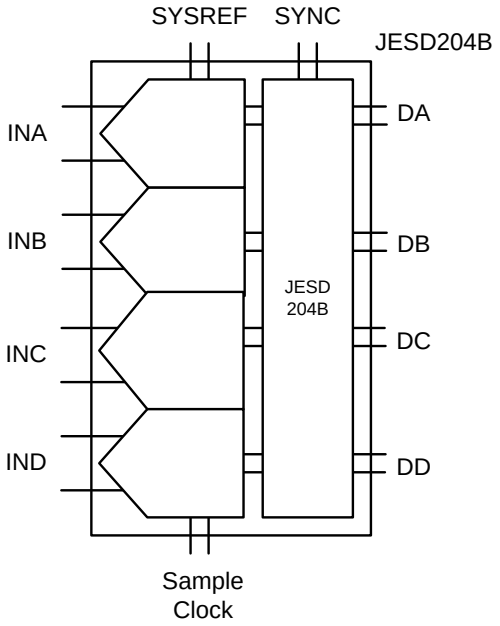

Figure 156. JESD204B Interface

Copyright © 2014–2015, Texas Instruments Incorporated

The JESD204B transmitter block consists of the transport layer, the data scrambler, and the link layer, as shown in Figure 157. The transport layer maps the ADC output data into the selected JESD204B frame data format and determines if the ADC output data or test patterns are transmitted. The link layer performs the 8b or 10b data encoding and the synchronization and initial lane alignment using the SYNC input signal. Optionally, data from the transport layer can be scrambled.

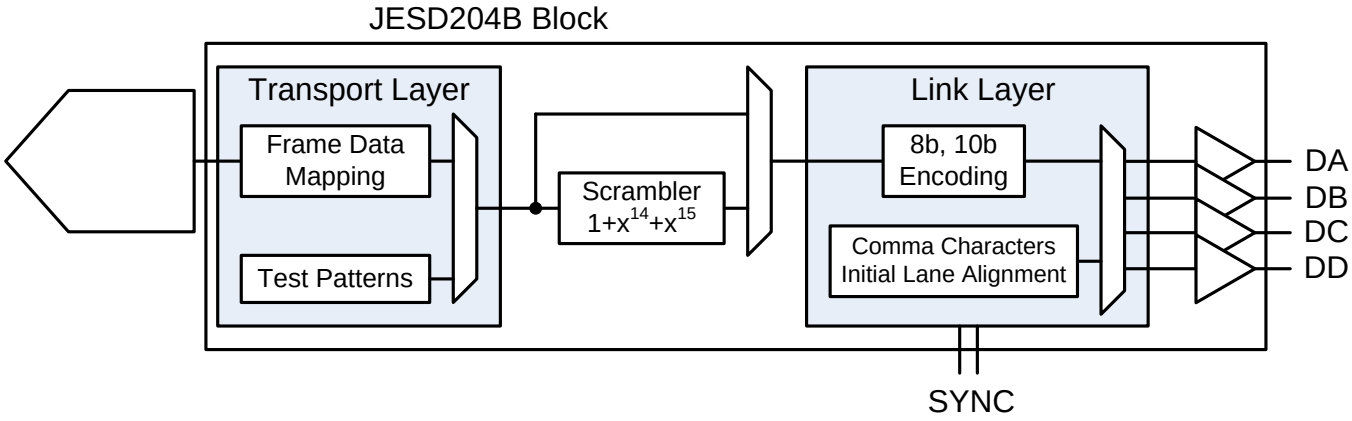

Figure 157. JESD204B Block

9.3.5.1 JESD204B Initial Lane Alignment (ILA)

The initial lane alignment process is started by the receiving device by asserting the SYNC signal. When a logic high is detected on the SYNC input pins, the ADC34J2x starts transmitting comma (K28.5) characters to establish code group synchronization. When synchronization is complete, the receiving device de-asserts the SYNC signal and the ADC34J2x starts the initial lane alignment sequence with the next local multiframe clock boundary. The ADC34J2x transmits four multiframes, each containing K frames (K is SPI programmable). Each multiframe contains the frame start and end symbols; the second multiframe also contains the JESD204 link configuration data.

9.3.5.2 JESD204B Test Patterns

There are three different test patterns available in the transport layer of the JESD204B interface. The ADC34J2x supports a clock output, an encoded, and a PRBS (2^{15} – 1) pattern. These patterns can be enabled via SPI register writes and are located in address 2Ah (bits 7:6).

9.3.5.3 JESD204B Frame Assembly

The JESD204B standard defines the following parameters:

- L is the number of lanes per link,
- M is the number of converters per device,
- F is the number of octets per frame clock period, and
- S is the number of samples per frame.

Table 4 lists the available JESD204B format and valid range for the ADC34J2x. The ranges are limited by the SERDES line rate and the maximum ADC sample frequency.

Table 4. LMFS Values and Interface Rate

L	M	F	S	MINIMUM ADC SAMPLING RATE (MSPS)	MAXIMUM f_{SERDES} (Mbps)	MAXIMUM ADC SAMPLING RATE (Msps)	MAXIMUM f_{SERDES} (GSPS)	MODE
4	4	2	1	15	300	160	3.2	20x (default)
2	4	4	1	10	400	80	3.2	40x

Copyright © 2014–2015, Texas Instruments Incorporated

The detailed frame assembly for quad-channel mode is shown in Figure 158. The frame assembly configuration can be changed from 20x (default) to 40x by setting the registers listed in Table 5.

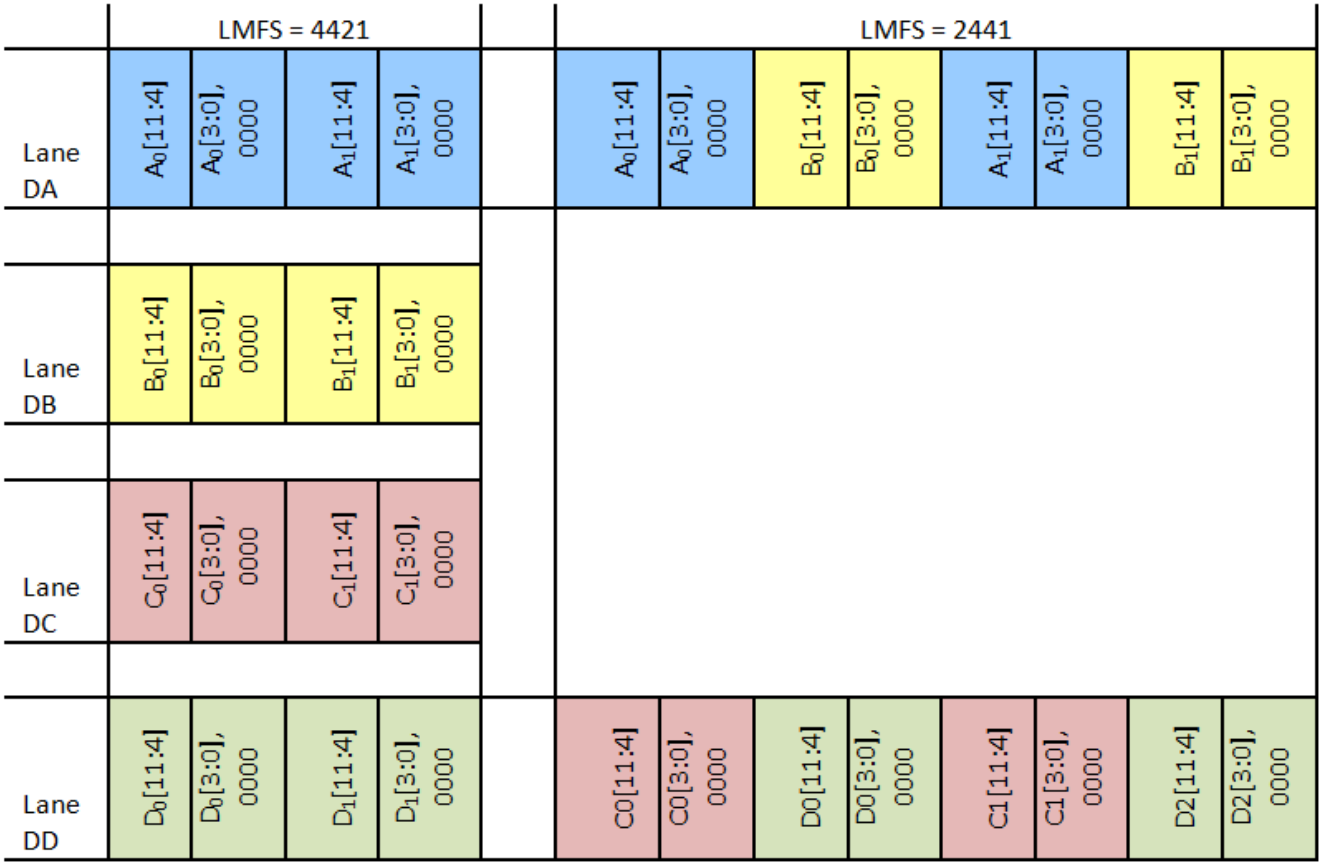

Figure 158. JESD Frame Assembly

Table 5. Configuring 40x Mode

ADDRESS	DATA
2Bh	01h
30h	11h

Copyright © 2014–2015, Texas Instruments Incorporated

9.3.5.4 Digital Outputs

The ADC34J2x JESD204B transmitter uses differential CML output drivers. The CML output current is programmable from 5 mA to 20 mA using SPI register settings. The output driver expects to drive a differential 100-Ω load impedance and the termination resistors should be placed as close to the receiver inputs as possible to avoid unwanted reflections and signal distortion. Because the JESD204B employs 8b, 10b encoding, the output data stream is dc-balanced and ac-coupling can be used to avoid the need to match up common-mode voltages between the transmitter and receivers. The termination resistors should be connected to the termination voltage as shown in Figure 159.

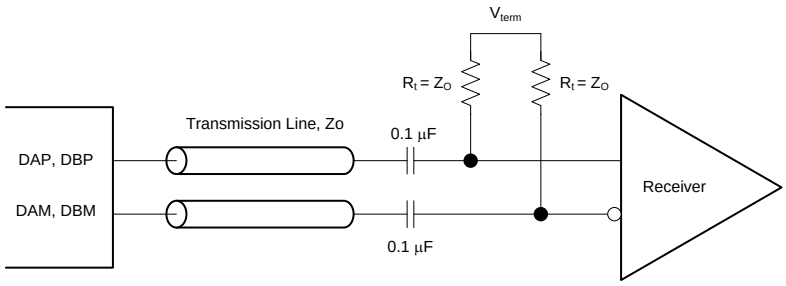

Figure 159. CML Output Connections

Figure 160 shows the data eye measurements of the device JESD204B transmitter against the JESD204B transmitter mask at 3.125 Gbps (156.25 MSPS, 20x mode), respectively.

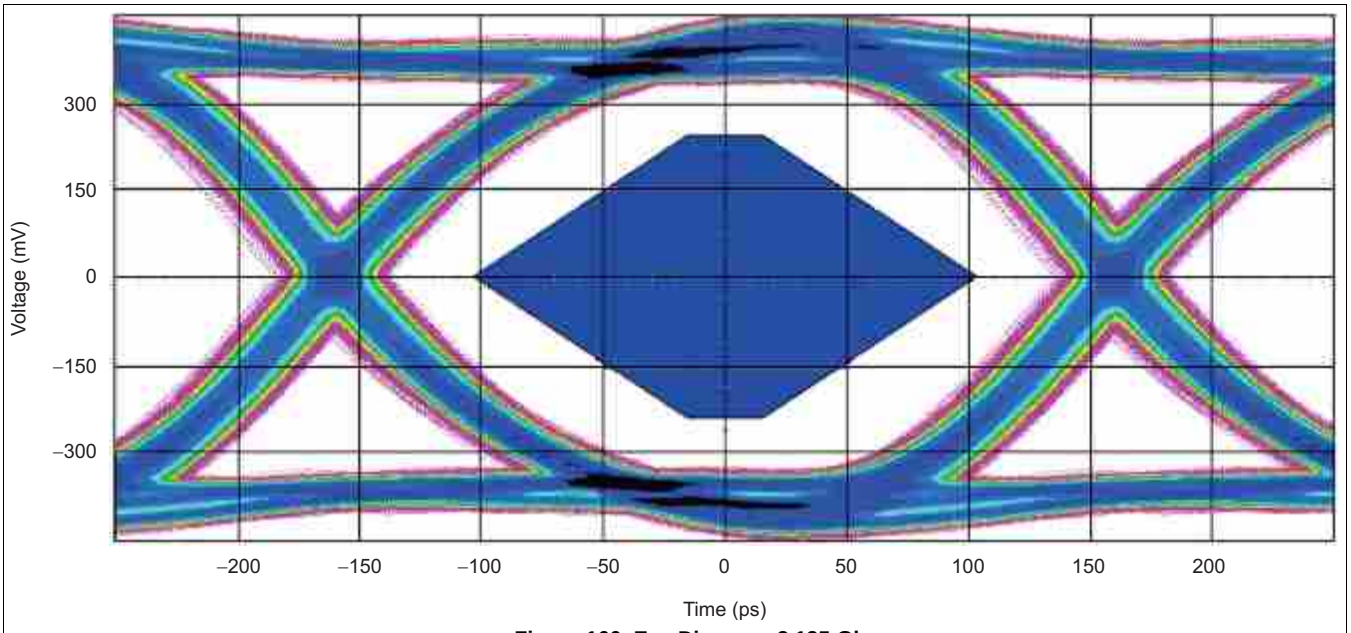

Figure 160. Eye Diagram: 3.125 Gbps

Copyright © 2014–2015, Texas Instruments Incorporated

9.4 Device Functional Modes

9.4.1 Digital Gain

The input full-scale amplitude can be selected between 1 V_{PP} to 2 V_{PP} (default is 2 V_{PP}) by choosing the appropriate digital gain setting via an SPI register write. Digital gain provides an option to trade-off SNR for SFDR performance. A larger input full-scale increases SNR performance (2 V_{PP} is recommended for maximum SNR) while reduced input swing typically results in better SFDR performance. Table 6 lists the available digital gain settings.

Table 6. Digital Gain vs Full-Scale Amplitude

DIGITAL GAIN (dB)	MAX INPUT VOLTAGE (V_{PP})
0	2.0
0.5	1.89
1	1.78
1.5	1.68
2	1.59
2.5	1.50
3	1.42
3.5	1.34
4	1.26
4.5	1.19
5	1.12
5.5	1.06
6	1.00

9.4.2 Overrange Indication

The ADC34J2x provides two different overrange indications. The normal OVR (default) is triggered if the final 14-bit data output exceeds the maximum code value. The fast OVR is triggered if the input voltage exceeds the programmable overrange threshold and is presented after just nine clock cycles, thus enabling a quicker reaction to an overrange event. By default, the normal overrange indication is output on the OVRx pins (where x is A, B, C, or D). The fast OVR indication can be presented on the overrange pins instead by using the SPI register map.

9.5 Programming

The ADS34Jxx can be configured using a serial programming interface, as described in this section.

9.5.1 Serial Interface

The device has a set of internal registers that can be accessed by the serial interface formed by the SEN (serial interface enable), SCLK (serial interface clock), SDATA (serial interface data), and SDOUT (serial interface data output) pins. Serially shifting bits into the device is enabled when SEN is low. Serial data SDATA are latched at every SCLK rising edge when SEN is active (low). The serial data are loaded into the register at every 24th SCLK rising edge when SEN is low. When the word length exceeds a multiple of 24 bits, the excess bits are ignored. Data can be loaded in multiples of 24-bit words within a single active SEN pulse. The interface can function with SCLK frequencies from 20 MHz down to very low speeds (of a few hertz) and also with a non-50% SCLK duty cycle.

Copyright © 2014–2015, Texas Instruments Incorporated

Programming (continued)

9.5.1.1 Register Initialization

After power-up, the internal registers must be initialized to their default values through a **hardware reset** by applying a high pulse on the RESET pin (of durations greater than 10 ns), as shown in Figure 161. If required, the serial interface registers can be cleared during operation either:

1. Through a hardware reset, or
2. By applying a software reset. When using the serial interface, set the RESET bit (D0 in register address 06h) high. This setting initializes the internal registers to the default values and then self-resets the RESET bit low. In this case, the RESET pin is kept low.

9.5.1.1.1 Serial Register Write

The device internal register can be programmed with these steps:

1. Drive the SEN pin low,
2. Set the R/W bit to 0 (bit A15 of the 16-bit address),
3. Set bit A14 in the address field to 1,
4. Initiate a serial interface cycle by specifying the address of the register (A13 to A0) whose content must be written, and
5. Write the 8-bit data that are latched in on the SCLK rising edge.

Figure 161 and Table 7 show the timing requirements for the serial register write operation.

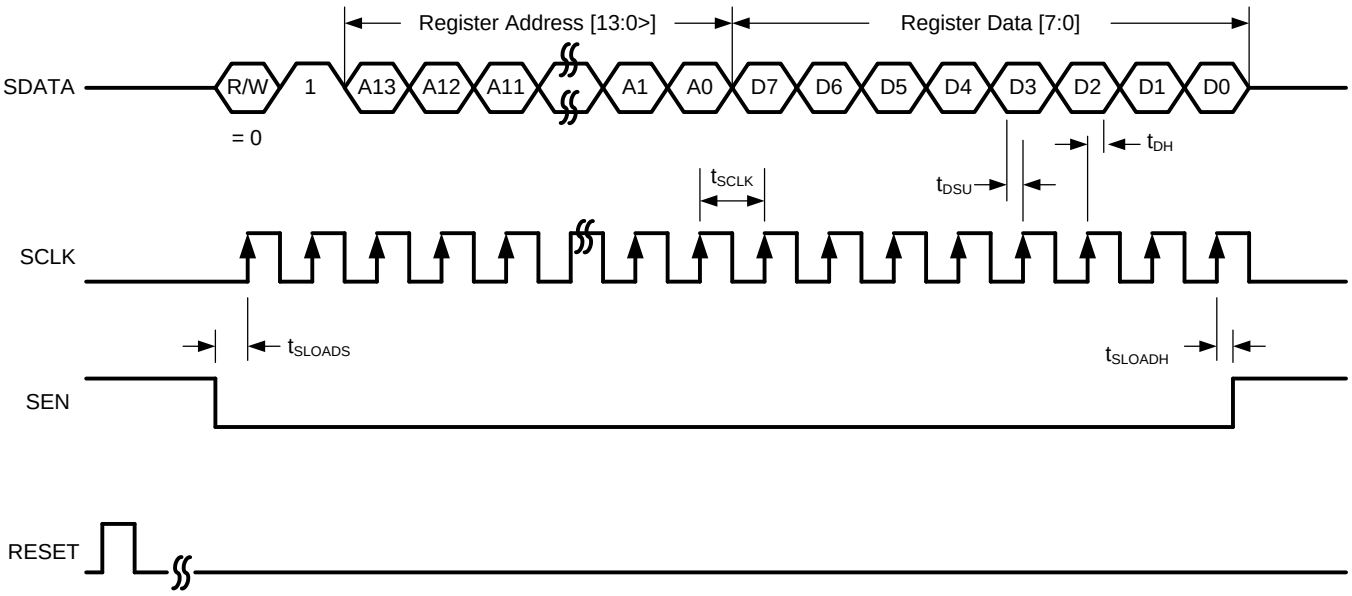

Figure 161. Serial Register Write Timing Diagram

Table 7. Serial Interface Timing(1)

PARAMETER		MIN	TYP	MAX	UNIT
f_{SCLK}	SCLK frequency (equal to 1 / t_{SCLK})	> dc		20	MHz
t_{SLOADS}	SEN to SCLK setup time	25			ns
t_{SLOADH}	SCLK to SEN hold time	25			ns
t_{DSU}	SDIO setup time	25			ns
t_{DH}	SDIO hold time	25			ns

(1) Typical values are at 25°C, full temperature range is from T_{MIN} = –40°C to T_{MAX} = 85°C, and AVDD = DVDD = 1.8 V, unless otherwise noted.

Copyright © 2014–2015, Texas Instruments Incorporated

9.5.1.1.2 Serial Register Readout

The device includes a mode where the contents of the internal registers can be read back using the SDOUT pin. This readback mode may be useful as a diagnostic check to verify the serial interface communication between the external controller and the ADC. Given below is the procedure to read contents of serial registers:

1. Drive the SEN pin low.
2. Set the R/W bit (A15) to 1. This setting disables any further writes to the registers.
3. Set bit A14 in the address field to 1.
4. Initiate a serial interface cycle specifying the address of the register (A13 to A0) whose content must be read.
5. The device outputs the contents (D7 to D0) of the selected register on the SDOUT pin.
6. The external controller can latch the contents at the SCLK rising edge.
7. To enable register writes, reset the R/W register bit to 0.

When READOUT is disabled, the SDOUT pin is in a high-impedance mode. If serial readout is not used, the SDOUT pin must float. Figure 162 shows a timing diagram of the serial register read operation. Data appear on the SDOUT pin at the SCLK falling edge with an approximate delay (t_{SD_DELAY}) of 20 ns, as shown in Figure 163.

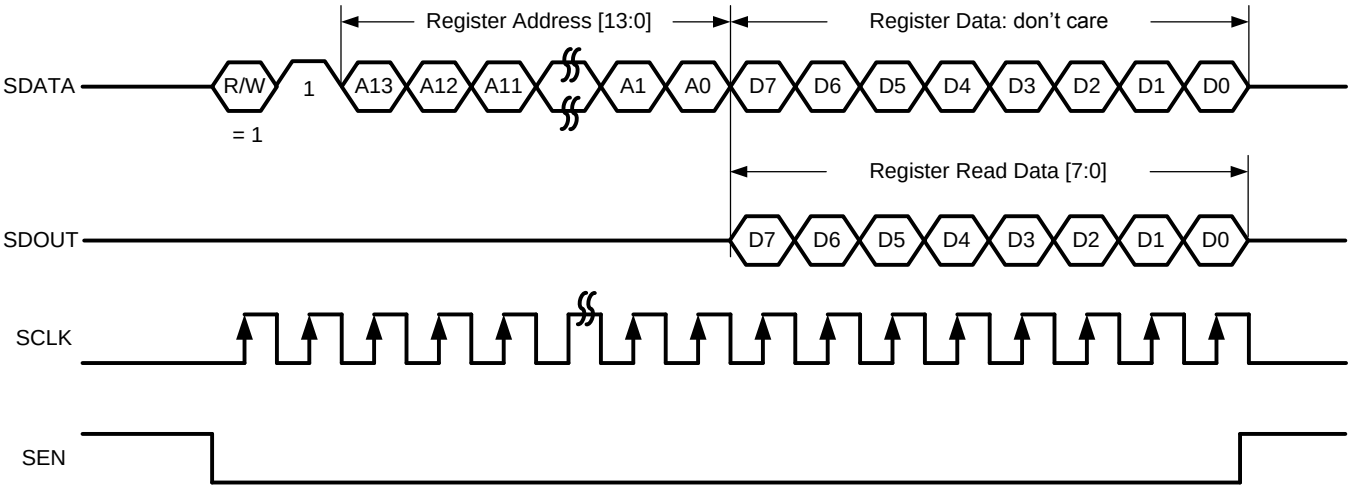

Figure 162. Serial Register Read Timing Diagram

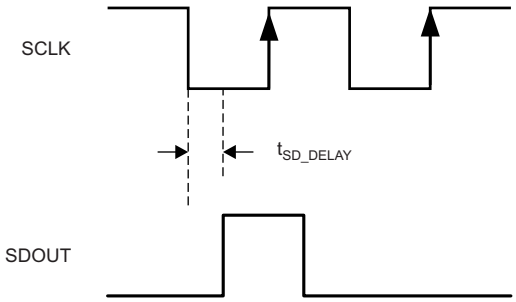

Figure 163. SDOUT Timing Diagram

Copyright © 2014–2015, Texas Instruments Incorporated

9.5.2 Register Initialization

After power-up, the internal registers must be initialized to their default values through a hardware reset by applying a high pulse on the RESET pin, as shown in Figure 164 and Table 8.

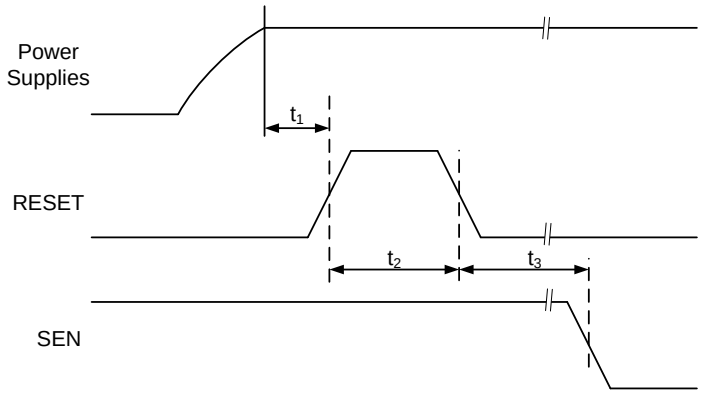

Figure 164. Initialization of Serial Registers after Power-Up

Table 8. Power-Up Timing

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
t_1	Power-on delay	Delay from power up to active high RESET pulse	1			ms
t_2	Reset pulse width	Active high RESET pulse width	10		1000	ns
t_3	Register write delay	Delay from RESET disable to SEN active	100			ns

If required, the serial interface registers can be cleared during operation either:

1. Through hardware reset, or
2. By applying a software reset. When using the serial interface, set the RESET bit (D0 in register address 06h) high. This setting initializes the internal registers to the default values and then self-resets the RESET bit low. In this case, the RESET pin is kept low.

9.5.3 Start-Up Sequence

After power-up, the sequence described in Table 9 can be used to set up the ADC34J2x for basic operation.

Table 9. Start-Up Settings

STEP	DESCRIPTION	REGISTER ADDRESS AND DATA
1	Bring up all supply voltages. There is no required power supply sequence for AVDD and DVDD	—
2	Pulse hardware reset (low to high to low) on pin 24	—
3	Optional configure LMFS of JESD204B interface to LMFS = 2441 (default is LMFS = 4421)	Address 2Bh, data 01h Address 30h, data 11h
4	Pulse SYNC~ from high to low to transmit data from k28.5 sync mode	—

Copyright © 2014–2015, Texas Instruments Incorporated

9.6 Register Map

Table 10. Serial Register Map

REGISTER ADDRESS	REGISTER DATA							
A[13:0] (Hex)	7	6	5	4	3	2	1	0
01	DIS DITH CHA		DIS DITH CHB		DIS DITH CHC		DIS DITH CHD	
02	0	0	0	0	0	0	CHA GAIN EN	0
03	0	0	0	0	0	0	CHB GAIN EN	0
04	0	0	0	0	0	0	CHC GAIN EN	0
05	0	0	0	0	0	0	CHD GAIN EN	0
06	0	0	0	SPECIAL MODE1 CHA			TEST PATTERN EN	RESET
07	0	0	0	SPECIAL MODE1 CHB			EN FOVR	0
08	0	0	0	SPECIAL MODE1 CHC			0	0
09	0	0	0	SPECIAL MODE1 CHD			ALIGN TEST PATTERN	DATA FORMAT
0A	CHA TEST PATTERN				CHB TEST PATTERN			
0B	CHC TEST PATTERN				CHD TEST PATTERN			
0C	CHA DIGITAL GAIN				CHB DIGITAL GAIN			
0D	CHC DIGITAL GAIN				CHD DIGITAL GAIN			
0E	CUSTOM PATTERN[11:4]							
0F	CUSTOM PATTERN [3:0]				0	0	0	0
13	LOW SPEED MODE	0	0	0	0	0	0	0
15	CHA PDN	CHB PDN	CHC PDN	CHD PDN	STANDBY	GLOBAL PDN	0	PDN PIN DISABLE
27	CLK DIV		0	0	0	0	0	0
2A	SERDES TEST PATTERN		IDLE SYNC	TRP LAYER TESTMODE EN	FLIP ADC DATA	LANE ALIGN	FRAME ALIGN	TXMIT LINKDATA DIS
2B	0	0	0	0	0	0	CTRL K	CTRL F
2F	SCR (SCR EN)	0	0	0	0	0	0	0
30	OCTETS PER FRAME							
31	0	0	0	FRAMES PER MULTI FRAME				
34	SUBCLASSV			0	0	0	0	0
3A	SYNC REQ	OPTION SYNC REG	0	0	OUTPUT CURRENT SEL			
3B	LINK LAYER TESTMODE SEL[2:0]			LINK LAYER RPAT	0	PULSE DET MODES		

Copyright © 2014–2015, Texas Instruments Incorporated

Register Map (continued)

Table 10. Serial Register Map (continued)

REGISTER ADDRESS	REGISTER DATA							
A[13:0] (Hex)	7	6	5	4	3	2	1	0
3C	FORCE LMFC COUNT	LMFC COUNT INIT					LMFC COUNT INIT	
122	0	0	0	0	0	0	SPECIAL MODE2 CHA [1:0]	
134	0	0	DIS DITH CHA	0	DIS DITH CHA	0	0	0
222	0	0	0	0	0	0	SPECIAL MODE2 CHD [1:0]	
234	0	0	DIS DITH CHD	0	DIS DITH CHD	0	0	0
422	0	0	0	0	0	0	SPECIAL MODE2 CHB [1:0]	
434	0	0	DIS DITH CHB	0	DIS DITH CHB	0	0	0
522	0	0	0	0	0	0	SPECIAL MODE2 CHC [1:0]	
534	0	0	DIS DITH CHC	0	DIS DITH CHC	0	0	0

Copyright © 2014–2015, Texas Instruments Incorporated

9.6.1 Serial Register Description

Figure 165. Register 01h

7	6	5	4	3	2	1	0
DIS DITH CHA		DIS DITH CHB		DIS DITH CHC		DIS DITH CHD	

Table 11. Register 01h Description

Name	Description
Bits 7:6	**DIS DITH CHA**
	00 = Default 11 = Dither is disabled, high SNR mode is selected for channel A. In this mode, SNR typically improves by 0.3 dB at 70 MHz. Ensure that register 134 (bits 5 and 3) are also set to 11.
Bits 5:4	**DIS DITH CHB**
	00 = Default 11 = Dither is disabled, high SNR mode is selected for channel B. In this mode, SNR typically improves by 0.3 dB at 70 MHz. Ensure that register 434 (bits 5 and 3) are also set to 11.
Bits 3:2	**DIS DITH CHC**
	00 = Default 11 = Dither is disabled, high SNR mode is selected for channel C. In this mode, SNR typically improves by 0.3 dB at 70 MHz. Ensure that register 534 (bits 5 and 3) are also set to 11.
Bits 1:0	**DIS DITH CHD**
	00 = Default 11 = Dither is disabled, high SNR mode is selected for channel D. In this mode, SNR typically improves by 0.3 dB at 70 MHz. Ensure that register 234 (bits 5 and 3) are also set to 11.

Figure 166. Register 02h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	CHA GAIN EN	0

Table 12. Register 02h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1	**CHA GAIN EN**
	Enable digital gain control for channel A. 0 = Default 1 = Digital gain for channel A can be programmed with the CHA DIGITAL GAIN bits.
Bit 0	**Must write 0**

Figure 167. Register 03h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	CHB GAIN EN	0

Table 13. Register 03h Description

Name	Description
Bits 7:2	**Must be 0**
Bit 1	**CHB GAIN EN:**
	Enable digital gain control for channel B. 0 = Default 1 = Digital gain for channel B can be programmed with the CHB DIGITAL GAIN bits.
Bit 0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 168. Register 04h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	CHC GAIN EN	0

Table 14. Register 04h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1	**CHC GAIN EN**
	Enable digital gain control for channel C. 0 = Default 1 = Digital gain for channel C can be programmed with the CHC DIGITAL GAIN bits.
Bit 0	**Must write 0**

Figure 169. Register 05h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	CHD GAIN EN	0

Table 15. Register 05h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1	**CHD GAIN EN:**
	Enable digital gain control for channel D 0 = Default 1 = Digital gain for channel D can be programmed with the CHD DIGITAL GAIN bits.
Bit 0	**Must write 0**

Figure 170. Register 06h

7	6	5	4	3	2	1	0
0	0	0	SPECIAL MODE1 CHA			TEST PATTERN EN	RESET

Table 16. Register 06h Description

Name	Description
Bits 7:5	**Must write 0**
Bits 4:2	**SPECIAL MODE1 CHA**
	010 = For frequencies < 120 MHz 111 = For frequencies > 120 MHz
Bit 1	**TEST PATTERN EN**
	This bit enables test pattern selection for the digital outputs. 0 = Normal operation 1 = Test pattern output enabled
Bit 0	**RESET: Software reset applied**
	This bit resets all internal registers to the default values and self-clears to 0.

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 171. Register 07h

7	6	5	4	3	2	1	0
0	0	0	SPECIAL MODE1 CHB			EN FOVR	0

Table 17. Register 07h Description

Name	Description
Bits 7:5	**Must write 0**
Bits 4:2	**SPECIAL MODE1 CHB**
	010 = For frequencies < 120 MHz 111 = For frequencies > 120 MHz
Bit 1	**EN FOVR**
	0 = Normal OVR on OVRx pins 1 = Enable fast OVR on OVRx pins
Bit 0	**Must write 0**

Figure 172. Register 08h

7	6	5	4	3	2	1	0
0	0	0	SPECIAL MODE1 CHC			0	0

Table 18. Register 08h Description

Name	Description
Bits 7:5	**Must write 0**
Bits 4:2	**SPECIAL MODE1 CHC**
	010 = For frequencies < 120 MHz 111 = For frequencies > 120 MHz
Bits 1:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 173. Register 09h

7	6	5	4	3	2	1	0
0	0	0	SPECIAL MODE1 CHD			ALIGN TEST PATTERN	DATA FORMAT

Table 19. Register 09h Description

Name	Description
Bits 7:5	**Must write 0**
Bits 4:2	**SPECIAL MODE1 CHD**
	010 = For frequencies < 120 MHz 111 = For frequencies > 120 MHz
Bit 1	**ALIGN TEST PATTERN**
	This bit aligns test patterns across the outputs of four channels. 0 = Test patterns of four channels are free running. 1 = Test patterns of four channels are aligned.
Bit 0	**DATA FORMAT: Digital output data format**
	0 = Twos complement 1 = Offset binary

Figure 174. Register 0Ah

7	6	5	4	3	2	1	0
CHA TEST PATTERN				CHB TEST PATTERN			

Table 20. Register 0Ah Description

Name	Description
Bits 7:4	**CHA TEST PATTERN**
	These bits control the test pattern for channel A after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 10101010101010 and 01010101010101. 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095. 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits. 0110 = Deskew pattern: data are AAAh. 1000 = PRBS pattern: data are a sequence of pseudo random numbers. 1001 = 8-point sine wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, 599. Others = Do not use
Bits 3:0	**CHB TEST PATTERN**
	These bits control the test pattern for channel B after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 10101010101010 and 01010101010101. 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095. 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits. 0110 = Deskew pattern: data are AAAh. 1000 = PRBS pattern: data are a sequence of pseudo random numbers. 1001 = 8-point sine wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, 599. Others = Do not use

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 175. Register 0Bh

7	6	5	4	3	2	1	0
CHC TEST PATTERN				CHD TEST PATTERN			

Table 21. Register 0Bh Description

Name	Description
Bits 7:4	**CHC TEST PATTERN**
	These bits control the test pattern for channel C after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 10101010101010 and 01010101010101. 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095. 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits. 0110 = Deskew pattern: data are AAAh. 1000 = PRBS pattern: data are a sequence of pseudo random numbers. 1001 = 8-point sine wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, 599. Others = Do not use
Bits 3:0	**CHD TEST PATTERN**
	These bits control the test pattern for channel D after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 10101010101010 and 01010101010101. 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095. 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits. 0110 = Deskew pattern: data are AAAh. 1000 = PRBS pattern: data are a sequence of pseudo random numbers. 1001 = 8-point sine wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, 599. Others = Do not use

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 176. Register 0Ch

7	6	5	4	3	2	1	0
CHA TEST PATTERN				CHB TEST PATTERN			

Table 22. Register 0Ch Description

Name	Description
Bits 7:4	**CHA TEST PATTERN**
	In address 0Ch, these bits control the test pattern for channel A after the CHA GAIN EN bit is set. See Table 23 for register settings.
Bits 3:0	**CHB TEST PATTERN**
	In address 0Ch, these bits control the test pattern for channel B after the CHB GAIN EN bit is set. See Table 23 for register settings.

Table 23. Channel Digital Gain

REGISTER VALUE	DIGITAL GAIN (dB)	MAXIMUM INPUT VOLTAGE (V_{PP})
0000	0	2.0
0001	0.5	1.89
0010	1	1.78
0011	1.5	1.68
0100	2	1.59
0101	2.5	1.50
0110	3	1.42
0111	3.5	1.34
1000	4	1.26
1001	4.5	1.19
1010	5	1.12
1011	5.5	1.06
1100	6	1.00

Figure 177. Register 0Dh

7	6	5	4	3	2	1	0
CHC TEST PATTERN				CHD TEST PATTERN			

Table 24. Register 0Dh Description

Name	Description
Bits 7:4	**CHC TEST PATTERN**
	In address 0Dh, these bits control the test pattern for channel C after the CHC GAIN EN bit is set. See Table 23 for register settings.
Bits 3:0	**CHD TEST PATTERN**
	In address 0Dh, these bits control the test pattern for channel D after the CHD GAIN EN bit is set. See Table 23 for register settings.

Figure 178. Register 0Eh

7	6	5	4	3	2	1	0
CUSTOM PATTERN[11:4]							

Table 25. Register 0Eh Description

Name	Description
Bits 7:0	**CUSTOM PATTERN[11:4]**
	These bits set the 14-bit custom pattern (11:4) for all channels.

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 179. Register 0Fh

7	6	5	4	3	2	1	0
CUSTOM PATTERN[3:0]				0	0	0	0

Table 26. Register 0Fh Description

Name	Description
Bits 7:2	**CUSTOM PATTERN[3:0]**
	These bits set the 14-bit custom pattern (3:0) for all channels.
Bits 3:0	**Must write 0**

Figure 180. Register 13h

7	6	5	4	3	2	1	0
LOW SPEED MODE	0	0	0	0	0	0	0

Table 27. Register 13h Description

Name	Description
Bit 7	**LOW SPEED MODE**
	Use this bit for sampling frequencies < 25 MSPS. 0 = Normal operation 1 = Low-speed mode enabled
Bits 6:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 181. Register 15h

7	6	5	4	3	2	1	0
CHA PDN	CHB PDN	CHC PDN	CHD PDN	STANDBY	GLOBAL PDN	0	CONFIG PDN PIN

Table 28. Register 15h Description

Name	Description
Bit 7	**CHA PDN: Power-down channel A**
	0 = Normal operation 1 = Power-down channel A
Bit 6	**CHB PDN: Power-down channel B**
	0 = Normal operation 1 = Power-down channel B
Bit 5	**CHC PDN: Power-down channel C**
	0 = Normal operation 1 = Power-down channel C
Bit 4	**CHD PDN: Power-down channel D**
	0 = Normal operation 1 = Power-down channel D
Bit 3	**STANDBY**
	This bit places the ADCs of all four channels into standby. 0 = Normal operation 1 = Standby
Bit 2	**GLOBAL PDN**
	Places device in global power down. 0 = Normal operation 1 = Global power-down
Bit 1	**Must write 0**
Bit 0	**CONFIG PDN PIN**
	This bit configures the PDN pin as either global power-down or standby pin. 0 = Logic high voltage on the PDN pin sends places the into global power-down. 1 = Logic high voltage on the PDN pin places the device into standby.

Figure 182. Register 27h

7	6	5	4	3	2	1	0
CLK DIV		0	0	0	0	0	0

Table 29. Register 27h Description

Name	Description
Bits 7:6	**CLK DIV: Internal clock divider for the input sampling clock**
	00 = Clock divider bypassed 01 = Divide-by-1 10 = Divide-by-2 11 = Divide-by-4
Bits 5:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 183. Register 2Ah

7	6	5	4	3	2	1	0
SERDES TEST PATTERN		IDLE SYNC	TESTMODE EN	FLIP ADC DATA	LANE ALIGN	FRAME ALIGN	TX LINK CONFIG DATA DIS

Table 30. Register 2Ah Description

Name	Description
Bits 7:6	**SERDES TEST PATTERN:**
	These bits set the test patterns in the transport layer of the JESD204B interface. 00 = Normal operation 01 = Outputs clock pattern (output is 10101010) 10 = Encoded pattern (output is 1111111100000000) 11 = Output is $2^{15} – 1$
Bit 5	**IDLE SYNC**
	This bit generates the long transport layer test pattern mode according to 5.1.6.3 clause of JESD204B specification. 0 = Test mode disabled 1 = Test mode enabled
Bit 4	**TESTMODE EN**
	This bit sets the output pattern when SYNC is high. 0 = Sync code is k28.5 (0xBCBC) 1 = Sync code is 0xBC50
Bit 3	**FLIP ADC DATA**
	This bit sets the output pattern when SYNC is high. 0 = Normal operation 1 = Output data order is reversed: MSB – LSB
Bit 2	**LANE ALIGN**
	This bit inserts a lane alignment character (K28.3) for the receiver to align to the lane boundary per section 5.3.3.5 of the JESD204B specification. 0 = Normal operation 1 = Inserts lane alignment characters
Bit 1	**FRAME ALIGN**
	This bit inserts a frame alignment character (K28.7) for the receiver to align to the frame boundary per section 5.3.3.4 of the JESD204B specification. 0 = Normal operation 1 = Inserts frame alignment characters
Bit 0	**TX LINK CONFIG DATA DIS**
	This bit disables the initial link alignment (ILA) sequence when SYNC is de-asserted. 0 = Normal operation 1 = ILA disabled

Figure 184. Register 2Bh

7	6	5	4	3	2	1	0
0	0	0	0	0	0	CTRL K	CTRL F

Table 31. Register 2Bh Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1	**CTRL K: Enable bit for number of frames per multiframe**
	0 = Default is 9 frames (20x mode) per multiframe 1 = Frames per multiframe can be set in register 31h
Bit 0	**CTRL F: Enable bit for number of octets per frame**
	0 = 20x mode using one lane per ADC (default is F = 2) 1 = Octets per frame can be specified in register 30h

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 185. Register 2Fh

7	6	5	4	3	2	1	0
SCRAMBLE EN	0	0	0	0	0	0	0

Table 32. Register 2Fh Description

Name	Description
Bit 7	**SCRAMBLE EN**
	This bit scrambles the enable bit in the JESD204B interface. 0 = Scrambling disabled 1 = Scrambling enabled
Bits 6:0	**Must write 0**

Figure 186. Register 30h

7	6	5	4	3	2	1	0
OCTETS PER FRAME							

Table 33. Register 30h Description

Name	Description
Bits 7:0	**OCTETS PER FRAME**
	These bits set the number of octets per frame (F). 01 = 20x serialization: two octets per frame 11 = 40x serialization: four octets per frame

Figure 187. Register 31h

7	6	5	4	3	2	1	0
0	0	0	FRAMES PER MULTI FRAME				

Table 34. Register 31h Description

Name	Description
Bits 7:5	**Must write 0**
Bits 4:0	**FRAMES PER MULT IFRAME**
	These bits set the number of frames per multiframe. After reset, the default settings for frames per multiframe are: 20x mode: K = 8 (for each mode, K should not be set to a lower value).

Figure 188. Register 34h

7	6	5	4	3	2	1	0
SUBCLASS			0	0	0	0	0

Table 35. Register 34h Description

Name	Description
Bits 7:5	**SUBCLASS**
	These bits set the JESD204B subclass. 000 = Subclass 0 (backward compatibility with JESD204A) 001 = Subclass 1 (deterministic latency using SYSREF signal) 010 = Subclass 2 (deterministic latency using SYNC detection)
Bits 4:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 189. Register 3Ah

7	6	5	4	3	2	1	0
SYNC REQ	SYNC REQ EN	0	0	OUTPUT CURRENT SEL			

Table 36. Register 3Ah Description

Name	Description
Bit 7	**SYNC REQ**
	This bit generates a synchronization request only when the SYNC REQ EN register bit is set. 0 = Normal operation 1 = Generates sync request
Bit 6	**SYNC REQ EN**
	0 = Sync request is made with the SYNCP~, SYNCM~ pins 1 = Sync request is made with the SYNC REQ register bit
Bits 5:4	**Must write 0**
Bits 3:0	**OUTPUT CURRENT SEL: JESD output buffer current selection**
	Program current (mA) 000 =16 001 = 12 010 = 8 011 = 4 100 = 32 101 = 28 110 = 24 111 = 20

Figure 190. Register 3Bh

7	6	5	4	3	2	1	0
LINK LAYER TESTMODE			LINK LAYER RPAT	0	PULSE DET MODES		

Table 37. Register 3Bh Description

Name	Description
Bits 7:5	**LINK LAYER TESTMODE**
	These bits generate a pattern according to clause 5.3.3.8.2 of the JESD204B document. 000 = Normal ADC data 001 = D21.5 (high frequency jitter pattern) 010 = K28.5 (mixed frequency jitter pattern) 011 = Repeat initial lane alignment (generates K28.5 character and repeat lane alignment sequences continuously) 100 = 12 octet RPAT jitter pattern
Bit 4	**LINK LAYER RPAT**
	This bit changes the running disparity in the modified RPAT pattern test mode (only when link layer test mode = 100). 0 = normal operation 1 = changes disparity
Bit 3	**Must write 0**
Bits 2:0	**PULSE DET MODES**
	These bits select different detection modes for SYSREF (subclass 1) and SYNC (subclass2).

Table 38. PULSE DET MODES Register Settings

D2	D1	D0	FUNCTIONALITY
0	Don’t care	0	Allow all pulses to reset input clock dividers
1	Don’t care	0	Do not allow reset of analog clock dividers
Don’t care	0 to 1 transition	1	Allow one pulse immediately after the 0 to1 transition to reset the divider

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 191. Register 3Ch

7	6	5	4	3	2	1	0
FORCE LMFC COUNT	LMFC COUNT INIT					RELEASE ILANE SEQ	

Table 39. Register 3Ch Description

Name	Description
Bit 7	**FORCE LMFC COUNT: Force LMFC count**
	0 = Normal operation 1 = Enables using different starting values for the LMFC counter
Bits 6:2	**LMFC COUNT INIT**
	If SYSREF is transmitted to the digital block, the LMFC count resets to 0 and K28.5 stops transmitting when the LMFC count reaches 31. The initial value that the LMFC count resets to can be set using LMFC COUNT INIT. In this manner, the Rx can be synchronized early because the Rx receives the LANE ALIGNMENT SEQUENCE early. The FORCE LMFC COUNT register bit must be enabled.
Bits 1:0	**RELEASE ILANE SEQ**
	These bits delay the lane alignment sequence generation by 0, 1, 2, or 3 multiframes after the code group synchronization. 00 = 0 01 = 1 10 = 2 11 = 3

Figure 192. Register 122h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	SPECIAL MODE2 CHA [1:0]	

Table 40. Register 122h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1:0	**SPECIAL MODE2 CHA [1:0]**
	Always write '11' for better HD2 performance.

Figure 193. Register 134h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHA	0	DIS DITH CHA	0	0	0

Table 41. Register 134h Description

Name	Description
Bits 7:6	**Must write 0**
Bit 5	**DIS DITH CHA**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel A. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 7:6) are also set to 11.
Bit 4	**Must write 0**
Bit 3	**DIS DITH CHA**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel A. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 7:6) are also set to 11.
Bits 2:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 194. Register 222h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	SPECIAL MODE 2 CHD [1:0]	

Table 42. Register 222h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1:0	**SPECIAL MODE 2 CHD [1:0]**
	Always write '11' for better HD2 performance.

Figure 195. Register 234h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHD	0	DIS DITH CHD	0	0	0

Table 43. Register 234h Description

Name	Description
Bits 7:6	**Must write 0**
Bit 5	**DIS DITH CHD**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel D. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 1:0) are also set to 11.
Bit 4	**Must write 0**
Bit 3	**DIS DITH CHD**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel D. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 1:0) are also set to 11.
Bits 2:0	**Must write 0**

Figure 196. Register 422h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	SPECIAL MODE 2 CHB [1:0]	

Table 44. Register 422h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1:0	**SPECIAL MODE 2 CHB [1:0]**
	Always write '11' for better HD2 performance.

Copyright © 2014–2015, Texas Instruments Incorporated

Figure 197. Register 434h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHB	0	DIS DITH CHB	0	0	0

Table 45. Register 434h Description

Name	Description
Bits 7:6	**Must write 0**
Bit 5	**DIS DITH CHB**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel B. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 5:4) are also set to 11.
Bit 4	**Must write 0**
Bit 3	**DIS DITH CHB**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel B. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 5:4) are also set to 11.
Bits 2:0	**Must write 0**

Figure 198. Register 522h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	SPECIAL MODE 2 CHC [1:0]	

Table 46. Register 522h Description

Name	Description
Bits 7:2	**Must write 0**
Bit 1:0	**SPECIAL MODE 2 CHC [1:0]**
	Always write '11' for better HD2 performance.

Figure 199. Register 534h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHC	0	DIS DITH CHC	0	0	0

Table 47. Register 534h Description

Name	Description
Bits 7:6	**Must write 0**
Bit 5	**DIS DITH CHC**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel C. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 3:2) are also set to 11.
Bit 4	**Must write 0**
Bit 3	**DIS DITH CHC**
	00 = Default 11 = Dither is disabled and high SNR mode is selected for channel C. In this mode, SNR typically improves by 0.5 dB at 70 MHz. Ensure that register 01h (bits 3:2) are also set to 11.
Bits 2:0	**Must write 0**

Copyright © 2014–2015, Texas Instruments Incorporated

10 Application and Implementation

10.1 Application Information

Typical applications involving transformer-coupled circuits are discussed in this section. Transformers (such as ADT1-1WT or WBC1-1) can be used up to 250 MHz to achieve good phase and amplitude balances at ADC inputs. While designing the dc driving circuits, the ADC input impedance must be considered. Figure 200 and Figure 201 show the impedance ($Z_{in} = R_{in} \parallel C_{in}$) across the ADC input pins.

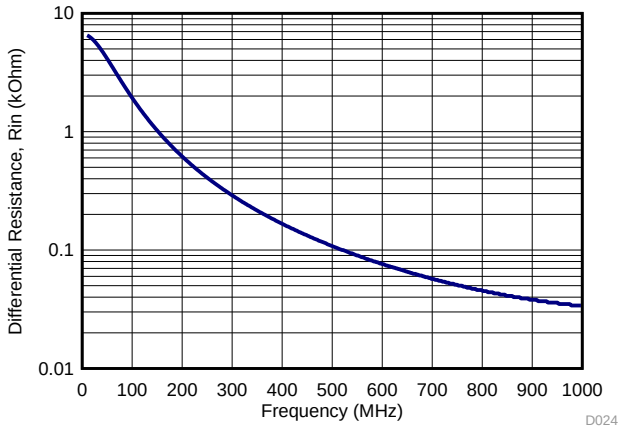

Figure 200. Differential Input Resistance, R_{IN}

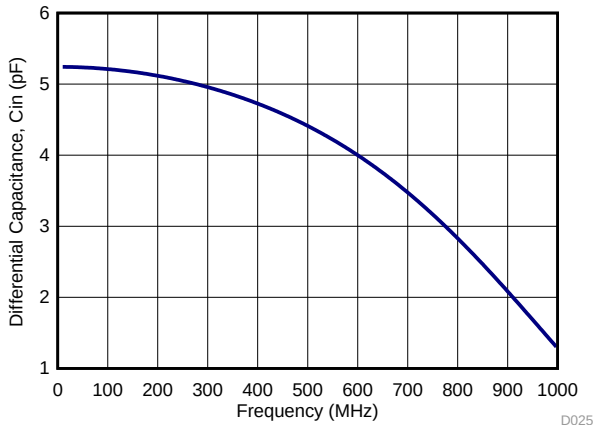

Figure 201. Differential Input Capacitance, C_{IN}

10.2 Typical Applications

10.2.1 Driving Circuit Design: Low Input Frequencies

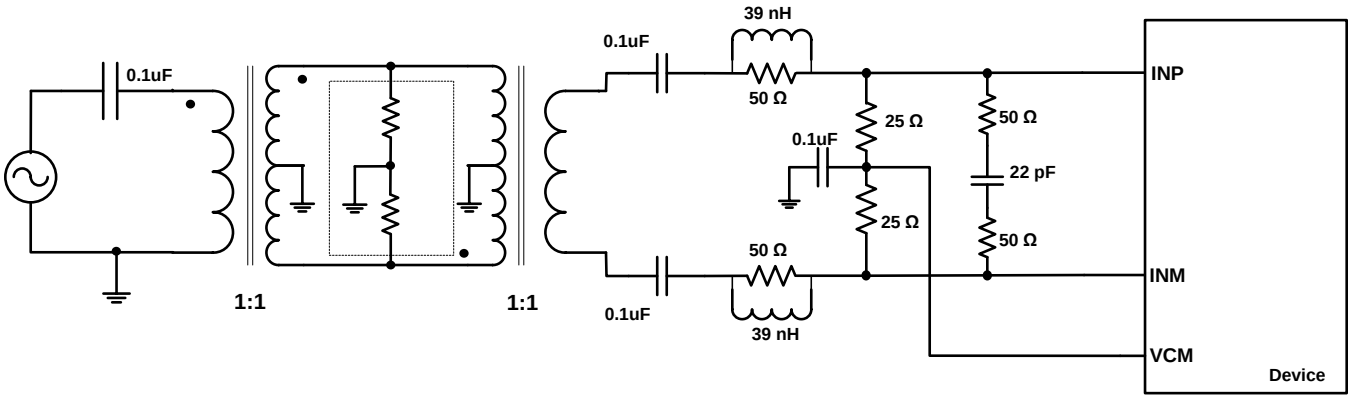

Figure 202. Driving Circuit for Low Input Frequencies

10.2.1.1 Design Requirements

For optimum performance, the analog inputs must be driven differentially. An optional 5-Ω to 15-Ω resistor in series with each input pin can be kept to damp out ringing caused by package parasitics. The drive circuit may have to be designed to minimize the impact of kick-back noise generated by sampling switches opening and closing inside the ADC, as well as ensuring low insertion loss over the desired frequency range and matched impedance to the source.

10.2.1.2 Detailed Design Procedure

A typical application using two back-to-back coupled transformers is illustrated in Figure 202. The circuit is optimized for low input frequencies. An external R-C-R filter using 50-Ω resistors and a 22-pF capacitor is used. With the series inductor (39 nH), this combination helps absorb the sampling glitches.

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Applications (continued)

10.2.1.3 Application Curve

Figure 203 shows the performance obtained by using the circuit shown in Figure 202.

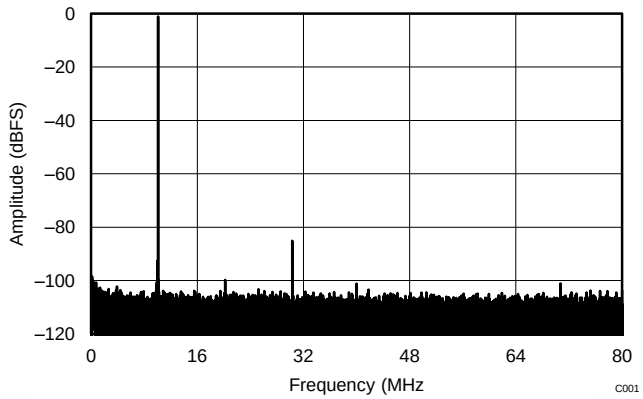

Figure 203. Performance FFT at 10 MHz (Low Input Frequency)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Applications (continued)

10.2.2 Driving Circuit Design: Input Frequencies Between 100 MHz to 230 MHz

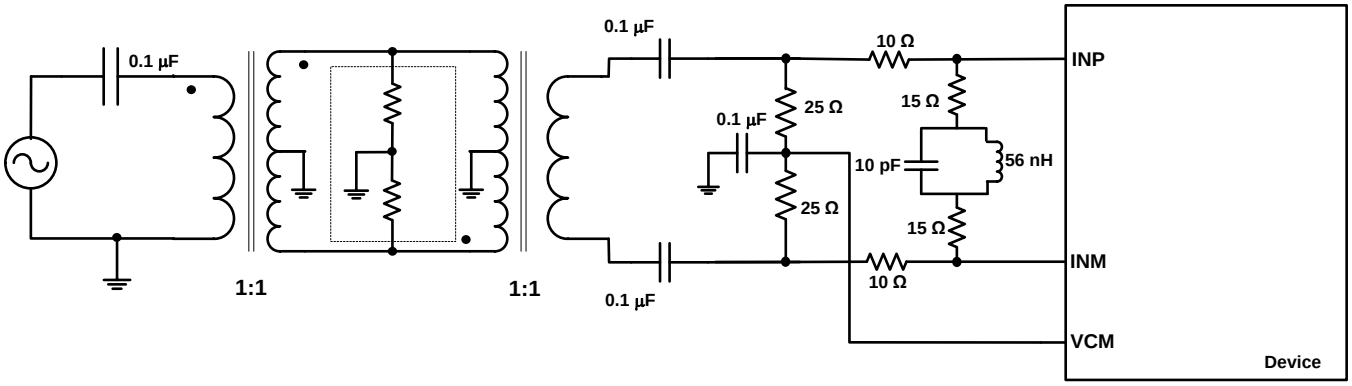

Figure 204. Driving Circuit for Mid-Range Input Frequencies (100 MHz < f_{IN} < 230 MHz)

10.2.2.1 Design Requirements

See the *Design Requirements* section for further details.

10.2.2.2 Detailed Design Procedure

When input frequencies are between 100 MHz to 230 MHz, an R-LC-R circuit can be used to optimize performance, as shown in Figure 204.

10.2.2.3 Application Curve

Figure 205 shows the performance obtained by using the circuit shown in Figure 204.

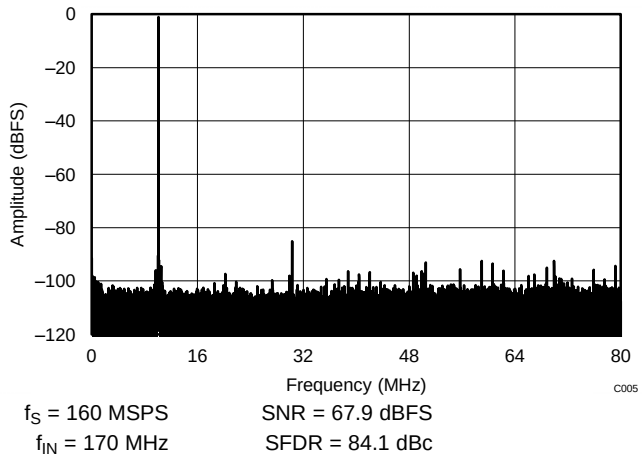

Figure 205. Performance FFT at 170 MHz (Mid Input Frequency)

Copyright © 2014–2015, Texas Instruments Incorporated

Typical Applications (continued)

10.2.3 Driving Circuit Design: Input Frequencies Greater than 230 MHz

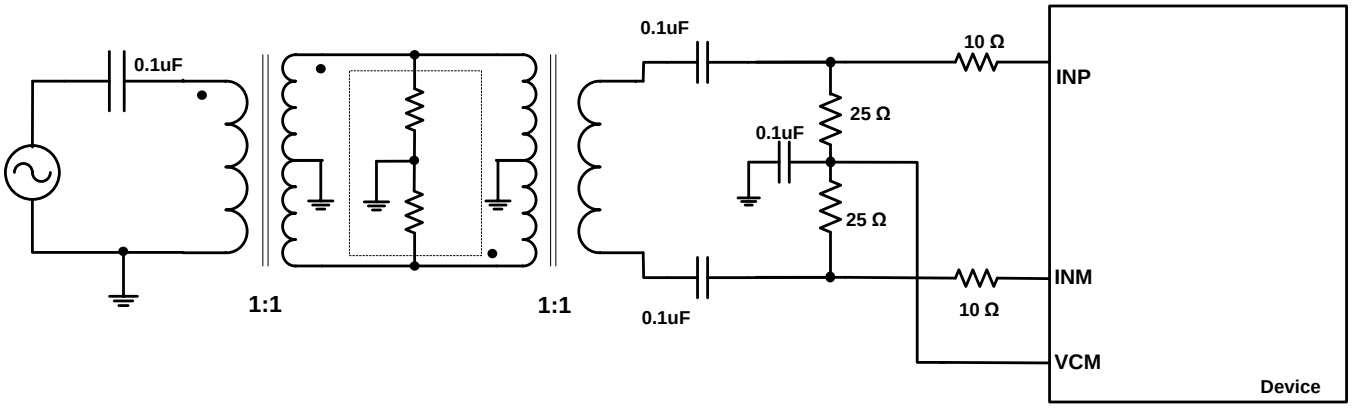

Figure 206. Driving Circuit for High Input Frequencies (f_{IN} > 230 MHz)

10.2.3.1 Design Requirements

See the *Design Requirements* section for further details.

10.2.3.2 Detailed Design Procedure

For high input frequencies (> 230 MHz), using the R-C-R or R-LC-R circuit does not show significant improvement in performance. However, a series resistance of 10 Ω can be used as shown in Figure 206.

10.2.3.3 Application Curve

Figure 207 shows the performance obtained by using the circuit shown in Figure 206.

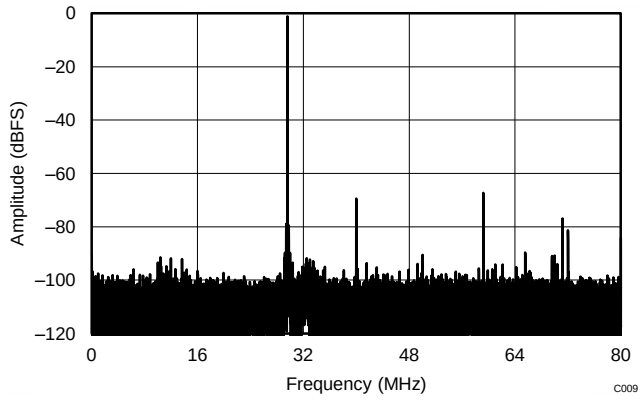

Figure 207. Performance FFT at 450 MHz (High Input Frequency)

11 Power-Supply Recommendations

The device requires a 1.8-V nominal supply for AVDD and DVDD. There are no specific sequence power-supply requirements during device power-up. AVDD and DVDD can power up in any order.

Copyright © 2014–2015, Texas Instruments Incorporated

12 Layout

12.1 Layout Guidelines

The ADC34J2x EVM layout can be used as a reference layout to obtain the best performance. A layout diagram of the EVM top layer is provided in Figure 208. Some important points to remember while laying out the board are:

1. Analog inputs are located on opposite sides of the device pin out to ensure minimum crosstalk on the package level. To minimize crosstalk onboard, the analog inputs should exit the pin out in opposite directions, as shown in the reference layout of Figure 208 as much as possible.
2. In the device pin out, the sampling clock is located on a side perpendicular to the analog inputs in order to minimize coupling between them. This configuration is also maintained on the reference layout of Figure 208 as much as possible.
3. Digital outputs should be kept away from the analog inputs. When these digital outputs exit the pin out, the digital output traces should not be kept parallel to the analog input traces because this configuration may result in coupling from digital outputs to analog inputs and degrade performance. All digital output traces to the receiver [such as a field-programmable gate array (FPGA) or an application-specific integrated circuit (ASIC)] should be matched in length to avoid skew among outputs.
4. At each power-supply pin (AVDD and DVDD), a 0.1-µF decoupling capacitor should be kept close to the device. A separate decoupling capacitor group consisting of a parallel combination of 10-µF, 1-µF, and 0.1-µF capacitors can be kept close to the supply source.

12.2 Layout Example

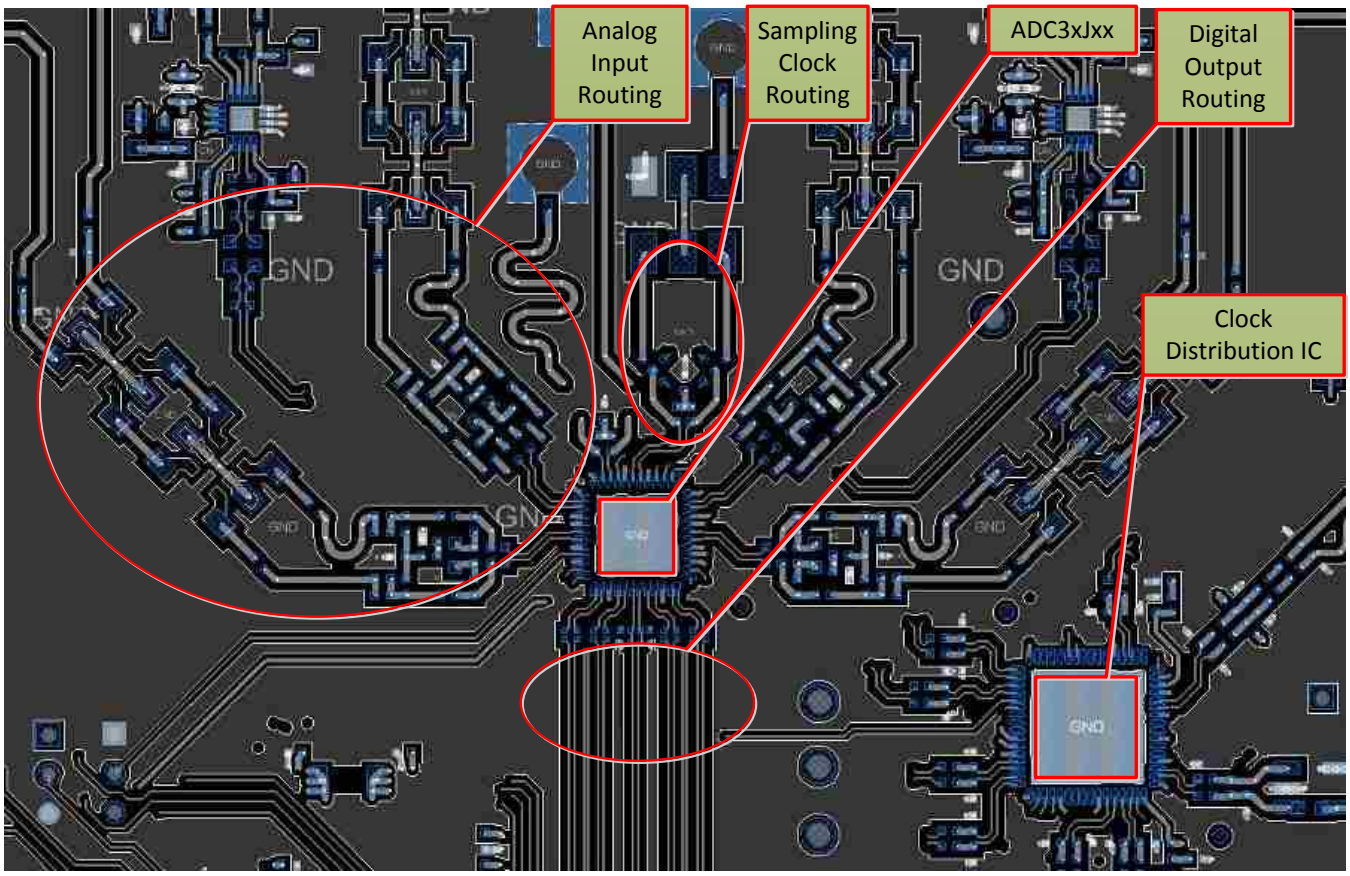

Figure 208. Typical Layout of the ADC34J2x Board

13 器件和文档支持

13.1 相关链接

表 48 列出了快速访问链接。 范围包括技术文档、支持与社区资源、工具和软件，并且可以快速访问样片或购买链接。

表 48. 相关链接

器件	产品文件夹	样片与购买	技术文档	工具与软件	支持与社区
ADC34J22	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC34J23	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC34J24	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC34J25	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处

13.2 商标

PowerPAD is a trademark of Texas Instruments, Inc.
All other trademarks are the property of their respective owners.

13.3 静电放电警告

ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。 精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

13.4 术语表

SLYZ022 — *TI 术语表*。

这份术语表列出并解释术语、首字母缩略词和定义。

14 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

版权 © 2014–2015, Texas Instruments Incorporated

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改， 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内，且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定，否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应 用相关的风险，客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息，不能构成从 TI 获得使用这些产品或服 务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可，或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分，仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时，如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分，则会失去相关 TI 组件 或服务的所有明示或暗示授权，且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意，尽管任何应用相关信息或支持仍可能由 TI 提供，但他们将独力负责满足与其产品及在其应用中使用 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意，他们具备制定与实施安全措施所需的全部专业技术和知识，可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中，为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此，此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III（或类似的生命攸关医疗设备）的授权许可，除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或"增强型塑料"的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意，对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用，其风险由客户单独承担，并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品，这些产品主要用于汽车。在任何情况下，因使用非指定产品而无法达到 ISO/TS16949 要求，TI不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址： 上海市浦东新区世纪大道1568 号，中建大厦32 楼邮政编码： 200122
Copyright © 2015, 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
ADC34J22IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J22	Samples
ADC34J22IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J22	Samples
ADC34J23IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J23	Samples
ADC34J23IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J23	Samples
ADC34J24IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J24	Samples
ADC34J24IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J24	Samples
ADC34J25IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J25	Samples
ADC34J25IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ34J25	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

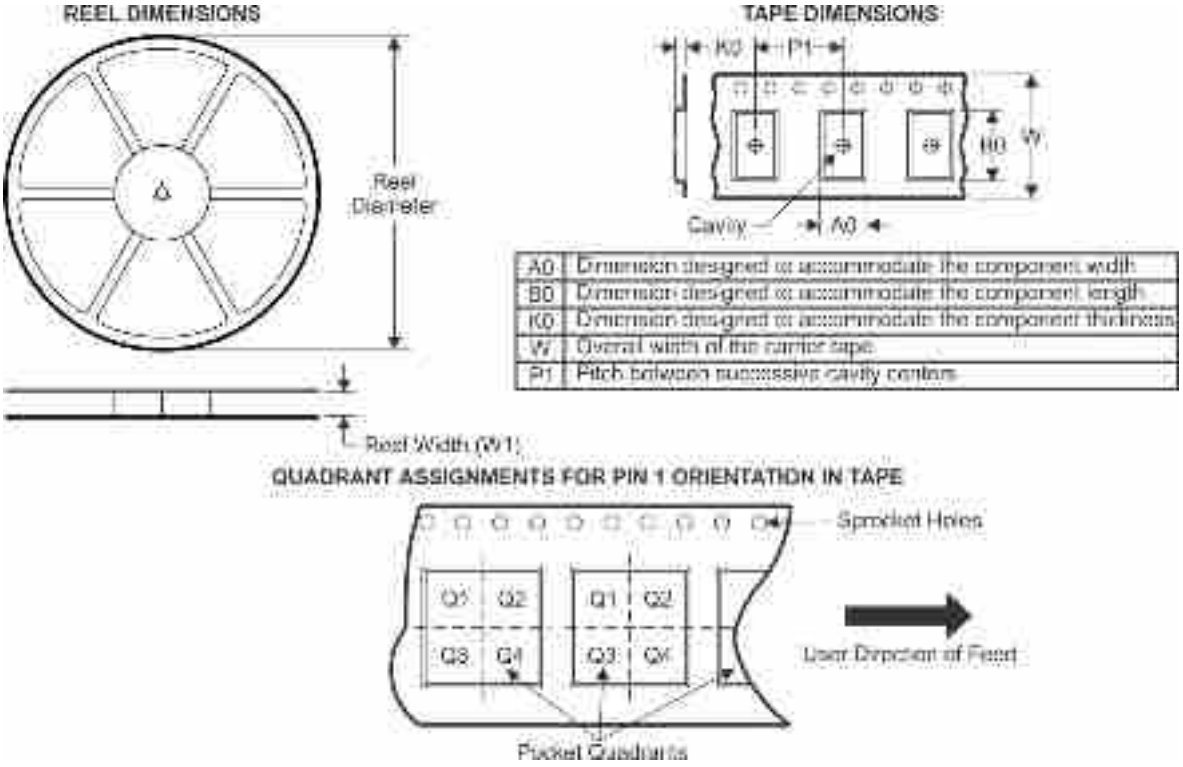

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ADC34J22IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J22IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J23IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J23IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J24IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J24IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J25IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC34J25IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS

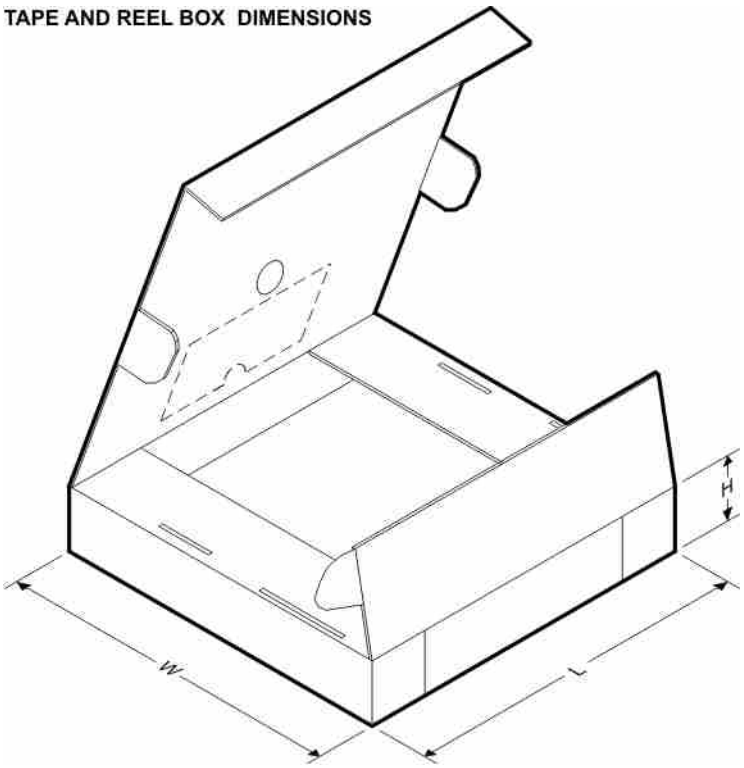

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ADC34J22IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC34J22IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC34J23IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC34J23IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC34J24IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC34J24IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC34J25IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC34J25IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0

GENERIC PACKAGE VIEW

RGZ 48

VQFN - 1 mm max height

7 x 7, 0.5 mm pitch

PLASTIC QUADFLAT PACK- NO LEAD

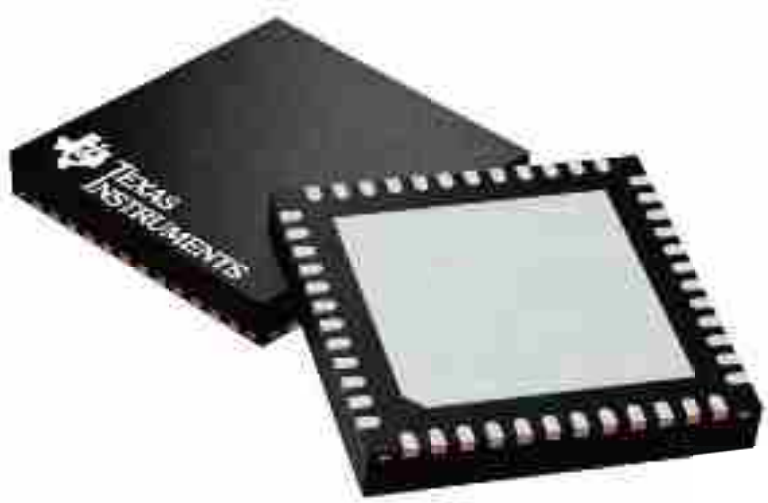

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4224671/A

PACKAGE OUTLINE

RGZ0048D

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

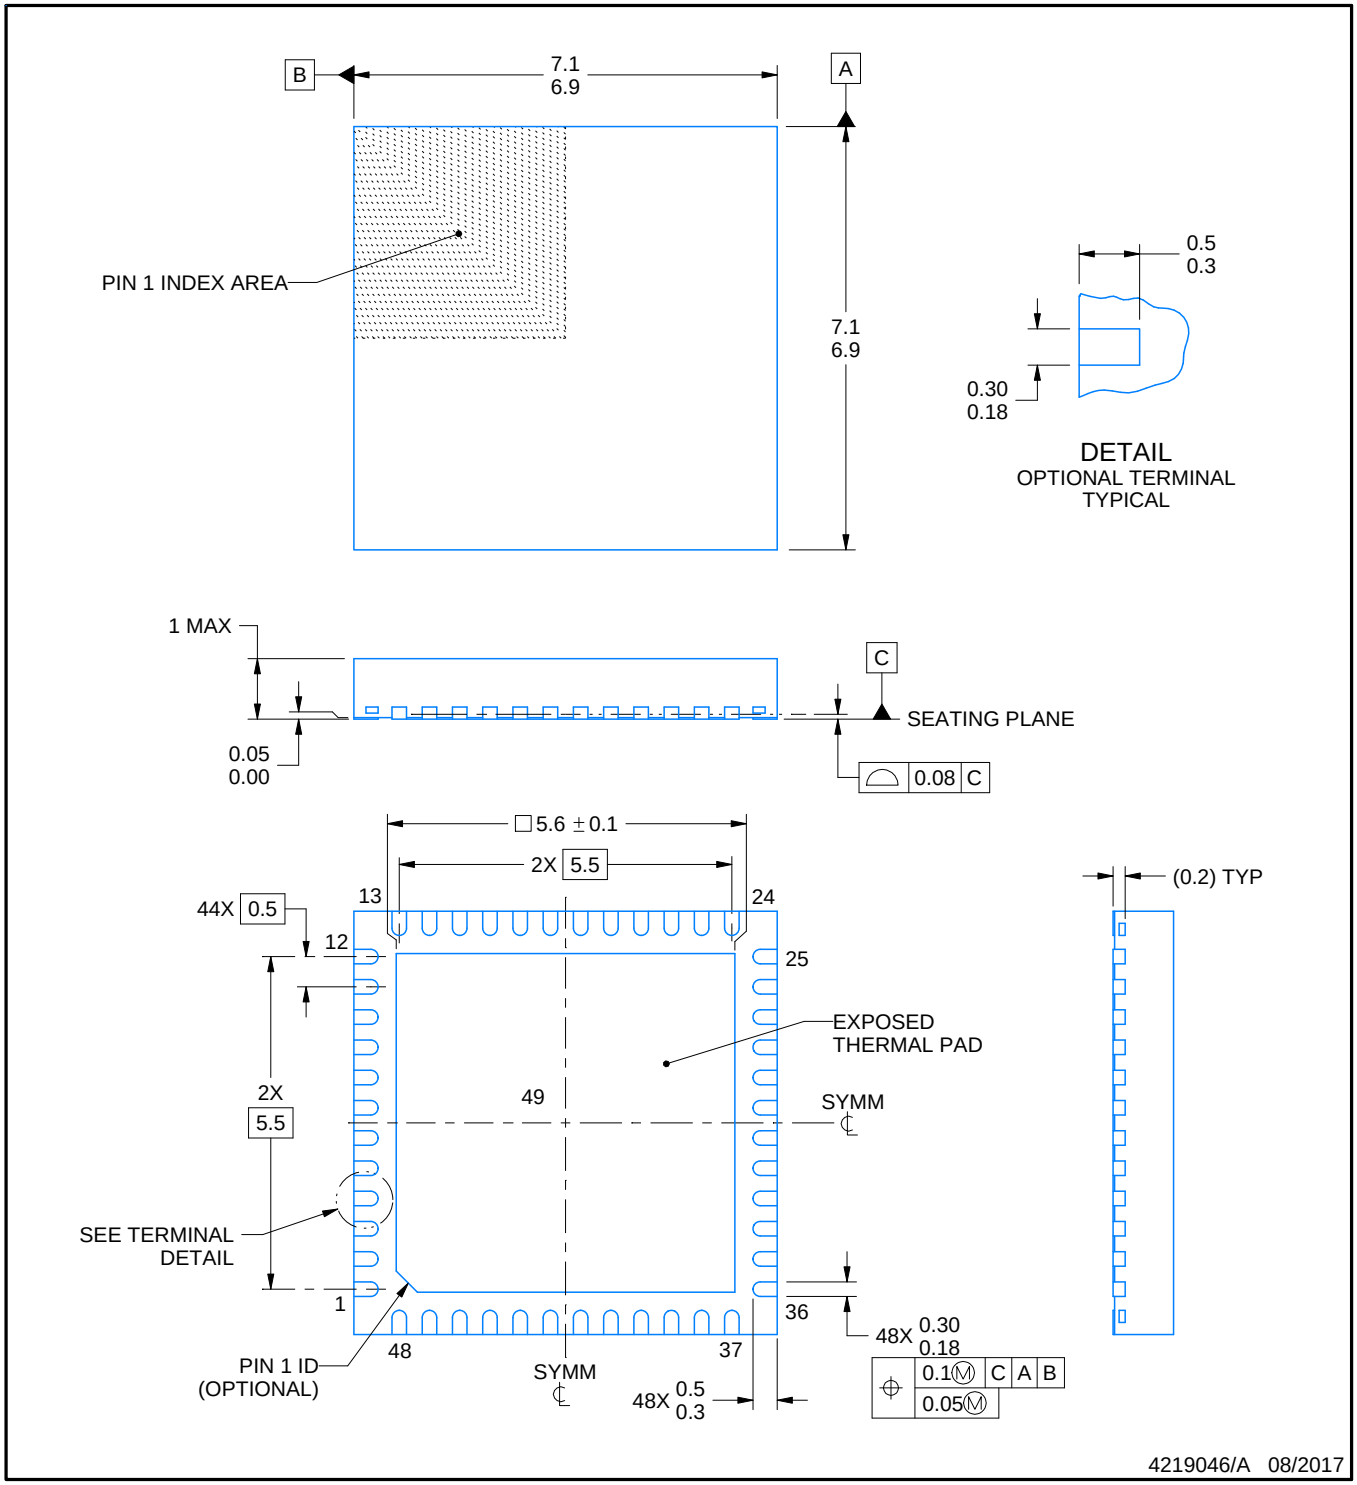

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

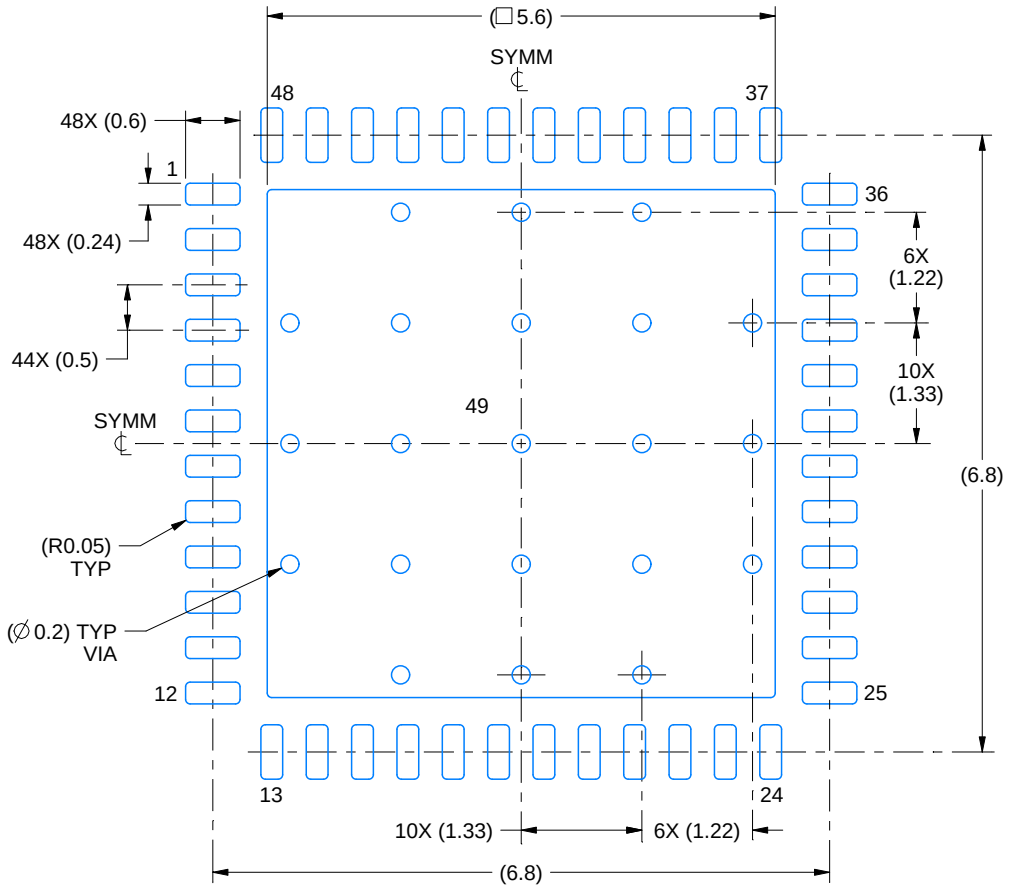

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:12X

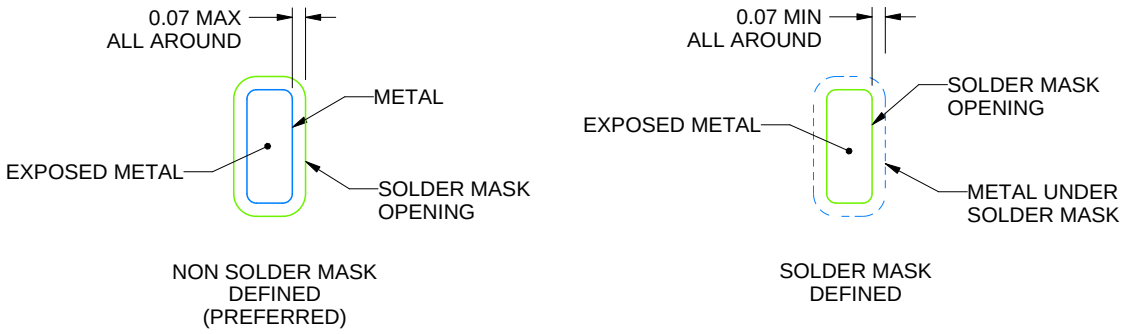

SOLDER MASK DETAILS

4219046/A 08/2017

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

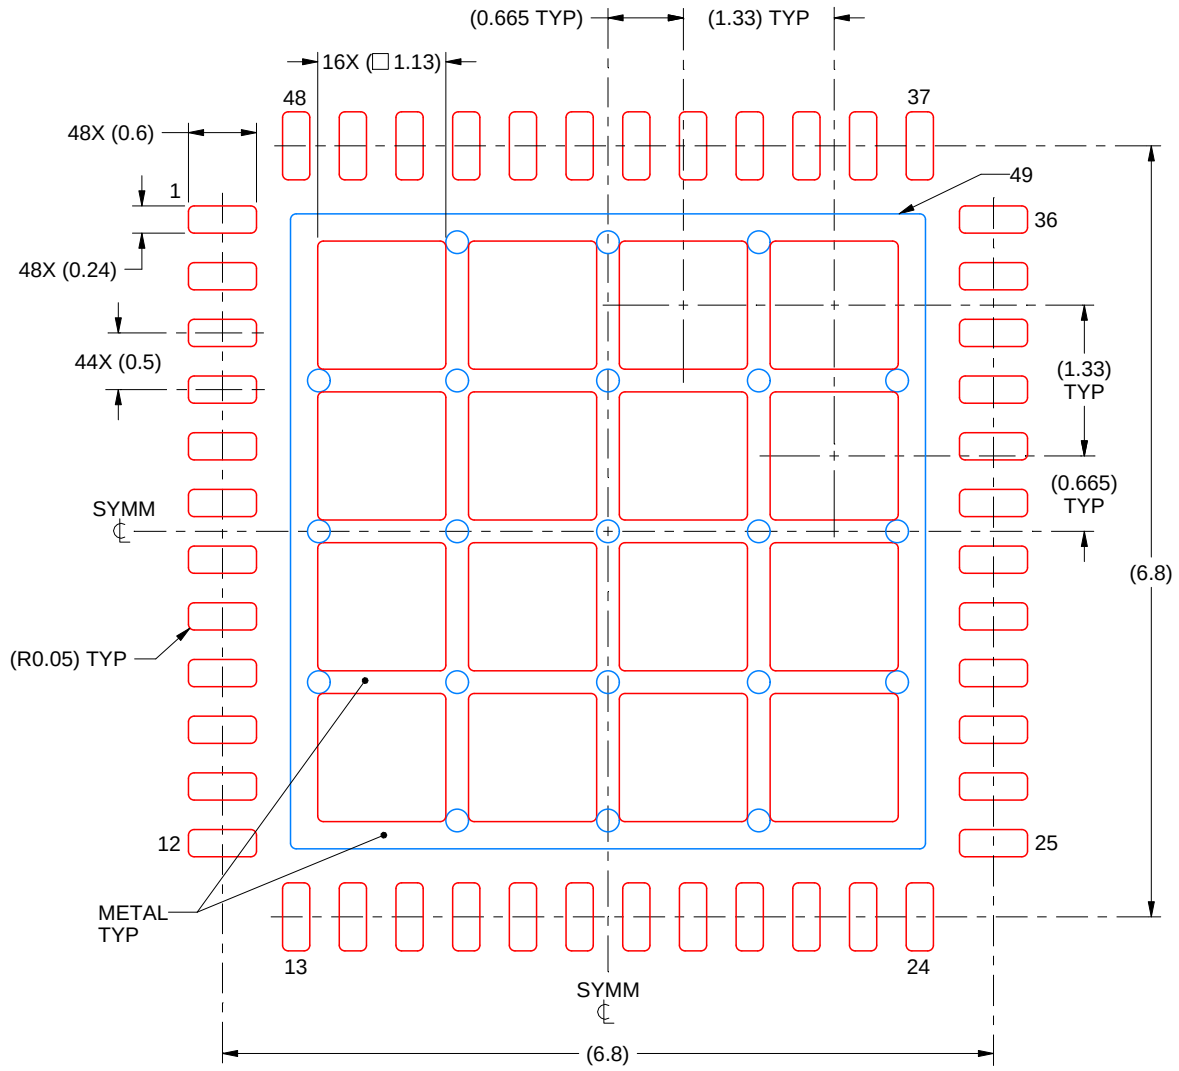

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 49
66% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:15X

4219046/A 08/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要声明和免责声明

TI 均以“原样”提供技术性及可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (http://www.ti.com.cn/zh-cn/legal/termsofsale.html) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司