

Coaxial Matching Pad

UNMP-R5075-33+

50/75Ω DC to 3000 MHz



CASE STYLE: FF779

The Big Deal

- Minimum loss pad
- Wideband coverage, DC to 3000 MHz
- Excellent VSWR

Product Overview

Mini-Circuits' UNMP-R5075-33+ is a coaxial 50/75Ω matching pad covering the DC to 3000 MHz frequency range, supporting impedance matching in a wide range of systems. This model is ideal for 50/75Ω impedance matching in systems where minimizing overall signal loss is a priority. The matching pad housed in a rugged unibody construction with N-Male (50Ω) to N-Female (75Ω) connectors.

Key Features

Feature	Advantages
Wideband, DC to 3000 MHz	Supports a wide variety of applications including CATV and DOCSIS® 3.1 systems and equipment.
Compact size, 0.68" x 2.11" x 0.71"	Accommodates tight space requirements for crowded system layouts.
Connectorized package N-Male (50Ω) to N-Female (75Ω) connectors	Supports connections between components with different connector types.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Matching Pad

50/75Ω

DC to 3000 MHz

UNMP-R5075-33+



CASE STYLE: FF779

Connectors Model
50ΩM-N UNMP-R5075-33+
75ΩF-N

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-45°C to 100°C
Storage Temperature	-55°C to 100°C
Input Power	2W

Permanent damage may occur if any of these limits are exceeded.

Features

- Minimum loss pad
- Wideband coverage, DC to 3000 MHz
- Excellent VSWR
- Rugged unibody construction


Applications

- Impedance matching

Coaxial Connections

Input	N-Male
Output	N-Female

Outline Drawing

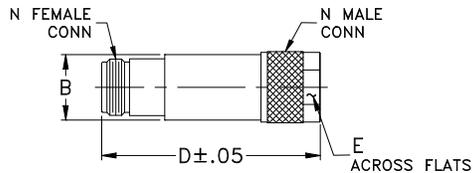

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Frequency Range		DC	--	3000	MHz	
Attenuation ¹	Nominal	DC-3000	--	5.7	--	
	Flatness ²	DC-3000	--	±0.15	--	
		DC-100	--	--	0.2	dB
		100-1000	--	--	0.3	
VSWR		DC-100	--	1.01	1.10	
		100-1000	--	1.05	1.10	:1
		1000-3000	--	1.1	1.20	
Input Power	DC-3000	--	--	2	W	

1. Attenuation varies by 0.3 dB max. over temperature
2. Flatness= variation over band divided by 2


Typical Performance Data 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		50 Ω	75 Ω
10	5.77	1.01	1.00
50	5.78	1.01	1.00
100	5.79	1.00	1.00
300	5.82	1.00	1.01
500	5.84	1.01	1.01
800	5.86	1.02	1.02
950	5.86	1.02	1.03
1000	5.86	1.02	1.03
1200	5.87	1.03	1.04
1500	5.87	1.04	1.05
1800	5.87	1.06	1.06
2000	5.87	1.06	1.07
2300	5.87	1.07	1.07
2500	5.86	1.08	1.08
2800	5.84	1.08	1.08
3000	5.82	1.08	1.08


Outline Dimensions (inch/mm)

B	D	E	wt
.68	2.11	.718	grams
17.27	53.59	18.24	72.5


Electrical Schematic

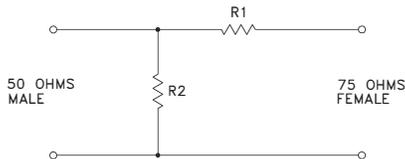

UNMP-R5075-33+
INSERTION LOSS

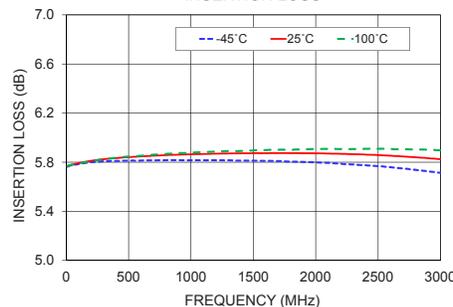

UNMP-R5075-33+
VSWR (50 Ω PORT)

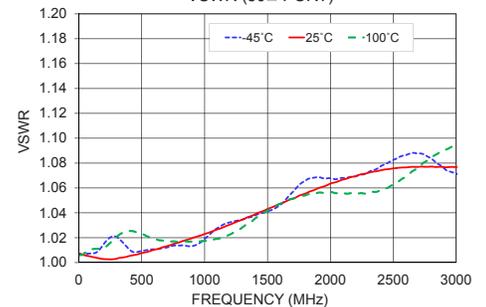

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp

