
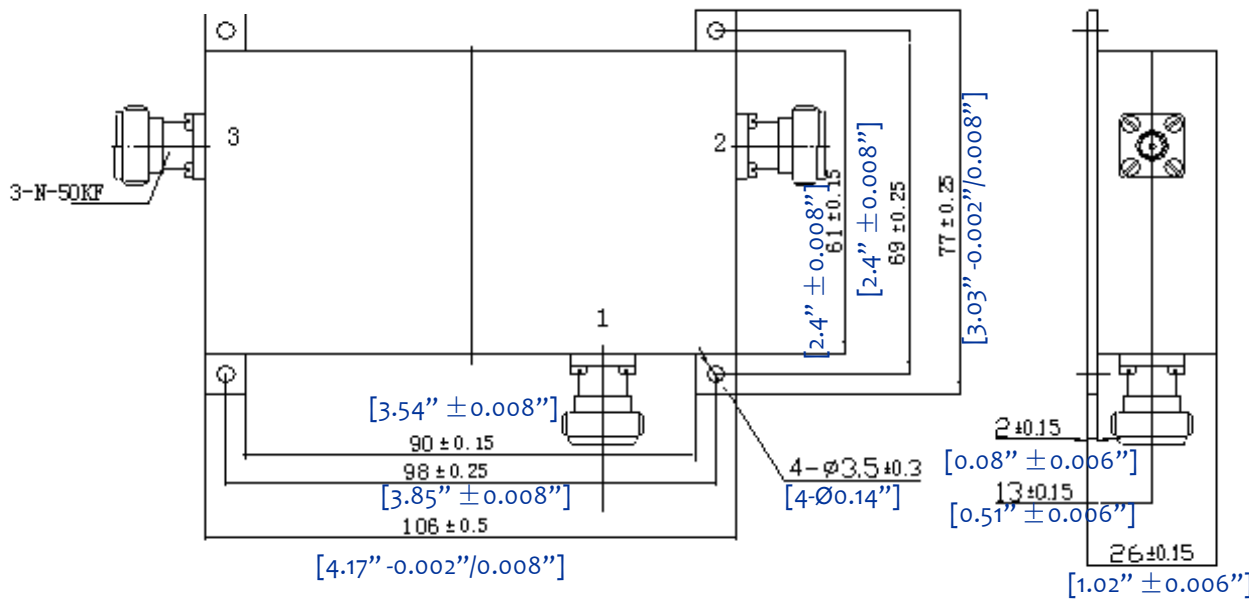



UHF DUAL JUNCTIONS ISOLATOR--- RFLI-117-1

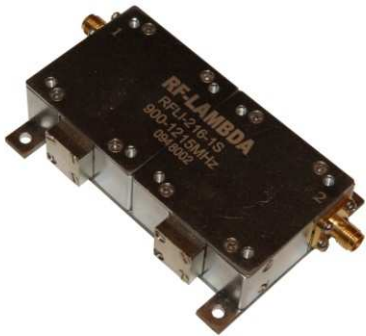

1.0	Mechanical Specifications	
1.1	Coaxial Connector	N, SMA-Female
1.2	External Body Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

2.0	Environment specifications	
2.1	Operation Temp.	0°C~+70°C
2.2	Storage Temp.	-40°C~+100°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PN	Center Frequency	Bandwidth	Insertion loss (dB) max	Isolation (dB) min	VSWR (max)	Power (W) CW
RFLI-117-1	400-800MHz	30% Fc. (450-600MHz as shown)	1.6dB (3->2)	36dB (2->3)	1.35	200

PAGE 1 OF 1	DATE Jan 8 th 2002
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.</small>	
 RFLI-117-1 DUAL JUNCTIONS ISOLATOR	
<small>www.rflambda.com</small>	
RF-LAMBDA	SIZE LT SHEETS 1 OF 1