

Wideband, DC Pass Directional Coupler ZCDC16-K5R44W+

50Ω 16dB Up to 20W 0.5 to 40 GHz

The Big Deal

- Wideband, 0.5 to 40 GHz
- Excellent Coupling Flatness, ± 1.1 dB typ.
- Power Handling up to 20W



CASE STYLE: HT2626

Product Overview

The Mini-Circuits ZCDC16-K5R44W+ wideband directional coupler offers exceptional performance operating over 0.5 to 40 GHz. This coupler has excellent coupling flatness, good directivity, and power handling. It is ideal for lab testing applications as well as for power monitoring over wide bands, among other applications.

Key Features

Feature	Advantages
Wide bandwidth	With a bandwidth spanning 0.5 to 40 GHz, ZCDC16-K5R44W+ coupler is ideal for most lab testing applications, avoiding the need to switch components for different frequency bands.
Excellent Directivity <ul style="list-style-type: none">• 13 dB typ. up to 40 GHz	High directivity allows sampling of input powers with minimal detrimental effects due to output mismatches.
Excellent coupling flatness, ± 1.1 dB typ	Excellent coupling flatness over the entire frequency range minimizes the need for compensation circuits in most cases.
Good Return Loss (In & Out) <ul style="list-style-type: none">• 14 dB typ. up to 40 GHz	Good return loss over 0.5 to 40 GHz minimizes undesired reflections and resulting amplitude ripple.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Wideband, DC Pass Directional Coupler

50Ω 16dB Up to 20W 0.5 to 40 GHz

ZCDC16-K5R44W+



CASE STYLE: HT2626

Connectors Model
2.92mm Female ZCDC16-K5R44W+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Supplied Termination*	1W
DC Current	0.6A

Permanent damage may occur if any of these limits are exceeded
* up to 25°C, derates linearly to 325mW at 100°C.

Coaxial Connections

INPUT	IN
OUTPUT	OUT
COUPLED	CPL
TERMINATION (50Ω) INCLUDED	—


Outline Drawing

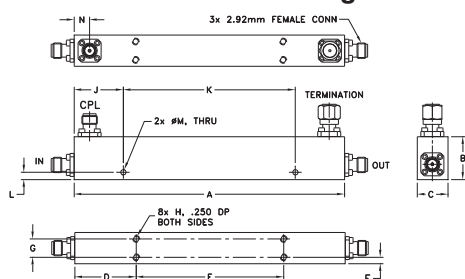

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
4.40	0.7	0.50	1.00	2.40	0.11	0.3
111.76	17.78	12.70	25.40	60.96	2.79	7.62
H	J	K	L	M	N	wt
#4-40	0.8	2.8	0.12	0.09	0.25	grams
UNC-2B	20.32	71.12	3.05	2.29	6.35	90

Electrical Schematic



Features

- Wide frequency range, 0.5 to 40 GHz
- Good coupling flatness, ± 1.1 dB typ.
- Good directivity, 13 dB typ. up to 40 GHz
- Good return loss, 14 dB typ. up to 40 GHz
- DC current pass through input to output

Applications

- 5G
- mobile
- fixed satellite
- lab use

Electrical Specifications at 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Operating Frequency		0.5		40	GHz
Nominal Coupling	0.5-40		16 \pm 2.1		dB
Coupling Flatness (\pm)	0.5-40		1.1	1.5	dB
Mainline Loss ¹	0.5-8 8-18 18-26.5 26.5-40		0.6 1.0 1.5 2.0	1.0 1.5 2.0 2.6	dB
Directivity	0.5-8 8-18 18-26.5 26.5-40	16.0 14.0 12.0 10.0	29 24 21 19		dB
Return Loss (In & Out)	0.5-8 8-18 18-26.5 26.5-40	15.5 14.0 12.7 11.7	31 29 29 29		dB
Return Loss (Coupling)	0.5-8 8-18 18-26.5 26.5-40	15.5 14.0 12.7 11.7	32 28 27 21		dB
Input Power**				20	W




1. Mainline loss includes coupling loss

** up to 25°C, derates linearly to 10W at 100°C.

Typical Performance Data

Frequency (MHz)	Mainline Loss ¹ (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB) In	Return Loss (dB) Out	Cpl
500	0.3	17.2	30.0	34.8	32.6	41.4
2000	0.5	15.4	27.9	42.8	38.5	38.7
4000	0.6	15.4	31.1	31.6	31.2	30.3
8000	0.8	14.8	25.2	33.4	38.6	23.6
14000	1.1	15.2	24.1	34.3	34.7	22.7
21000	1.4	15.3	18.2	28.2	29.5	30.1
26500	1.7	16.0	25.7	30.3	27.1	20.7
30000	1.9	16.1	15.5	33.3	37.3	15.6
36000	2.2	15.8	23.3	25.9	24.7	21.9
40000	2.3	16.3	12.5	27.9	34.6	14.7

1. Mainline loss includes coupling loss

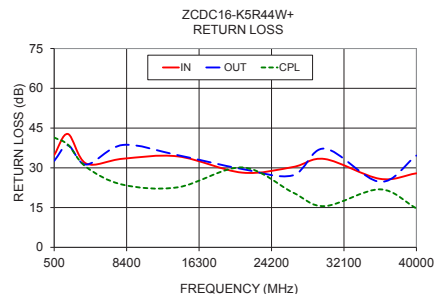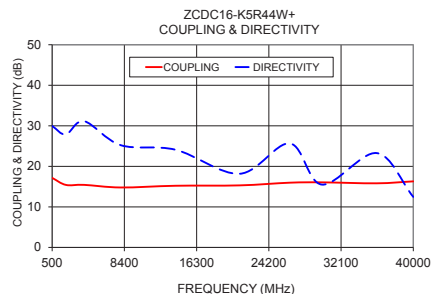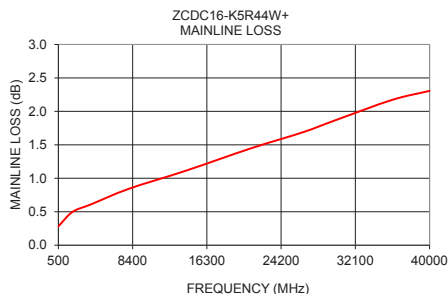

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M173098
ZCDC16-K5R44W+
WP/CP/AM
190306
Page 2 of 2