

-Key Features-

- Power Meter 50 to 7000MHz
- Frequency Counter 100 to 7000MHz
- Signal Generator 300 to 9600MHz
- Internal 31dB Step Attenuator
- High Output Power
- Low Phase Noise
- RF Divider Mode
- Windows GUI Operation USB COM Port
- Internal 280PPB Reference
- External 10MHz Reference Input
- OLED Display and Buttons
- Industry Standard SCPI Commands

DS Instruments

TT7000_{R4}

RF Power Meter, Signal Generator, Frequency Counter



TT7000, A Multi-Purpose Instrument

The TT7000 combines a Microwave Power Meter, Signal Source, Frequency counter, and RF Divider in one compact instrument. The frequency counter and power meter cover up to 7000MHz. The signal generator covers from 300 to 9600MHz.

Counting and Power reading can be done simultaneously over the entire band. The power meter range is from -45dBm to +5dBm. Accuracy is typically +/- 1.25dB from 0dBm to -30dBm when the frequency count is valid. Frequency can be manually set for low power signals to calibrate the power reading value.

The SG function is fully synthesized with step size less than 10Hz using precision internal or external 10MHz reference. Adjustable output power from +10dBm to -20dBm is now standard for the TT7000 with 0.25dB steps! Signal generator and power meter can function simultaneously and will auto-calibrate to the set frequency.

The RF input can also be processed by a RF Divider with 1/2/4/8 options. The output of the RF Divider is available on the RF OUT port with adjustable power level.

Front Panel and USB Interfaces

With the TT7000 connected to a host PC via its USB port, which is configured as a virtual COM port, industry standard SCPI text commands can control the TT7000 and retrieve instrument measurement data.

The OLED display and interface buttons allow the user to not only verify incoming SCPI commands from the USB interface, but also control the unit in standalone mode with NO HOST PC REQUIRED.




www.dsinstruments.com

TT7000 Rev. 4



Never exceed the maximum power of +15dBm on the meter INPUT port!

- Power measurements can be inaccurate if the automatic counter cannot determine an approximate frequency. Use the PC GUI to manually enter the frequency range of your signal if auto-range is not consistent.
- If the power level is too low or there is no signal input, the frequency counter display will wonder. This is normal functionality.

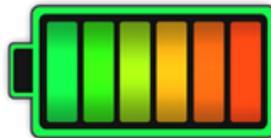

The TT7000 requires up to **0.75** Amperes in certain modes. Some legacy USB ports are limited to 0.5 Amperes. A stable 5.0 volt input voltage is critical for reliable operation within the unit's specifications. Many common ways to satisfy this requirement exist:


- A high quality USB cable connected directly to a POWERED USB hub.
- A high quality dual-port USB cable connected to two USB ports.
- A high quality USB cable plugged into a blue **USB 3** port.
- A lithium-ion USB battery pack
- A USB smart phone charger (5 Volt wall adapter)

*A "High Quality" USB cable uses a heavier gauge wire resulting in less voltage loss from end to end. Our suggested cable is maximum 1 meter length with 22 AWG conductors.

For more information or questions contact us:
Support@DSInstruments.com

TT7000

TT7000 Front and Rear Panel Features

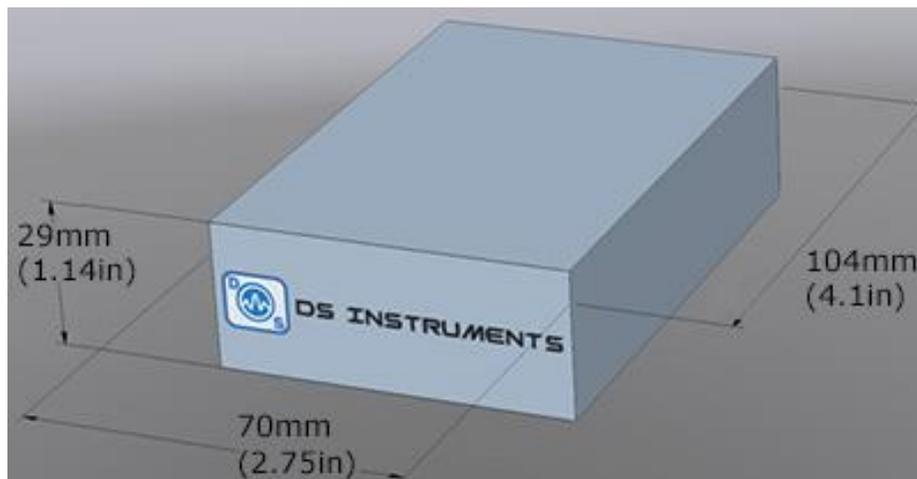

TT7000

SIGNAL GENERATOR SPECIFICATIONS

Conditions: 25° C, USB supplied power


Parameter	Min	Max	Typ	Units
Output Frequency Range	300	9600		MHz
RF Output Power (at 0 attenuation setting)	+8	+17	+12	dBm dBm
Output Flatness	-3	+3	+/-2	dB dB
Phase Noise @ 9600MHz, 10KHz Offset			-76	dBc
@ 4800MHz, 10KHz Offset			-80	dBc
@ 2100MHz, 10KHz Offset			-87	dBc
@ 900MHz, 10KHz Offset			-95	dbc
@ 433MHz, 10KHz Offset			-102	dBc
@ 315MHz, 10KHz Offset			-104	dBc
Output VSWR	1.2:1	1.5:1	1.3:1	---
Step Size 2400 to 4400MHz (decreases by 2 as RF band reduces)		10		Hz
Power Attenuator Range	0	31.5		dB
Power Attenuator Step Size			0.25	dB
USB Voltage	4.9	5.3	5.0	Vdc
Temperature Range	-30	+45	25	C
Reference Frequency MCX Input (10MHz)	0	12	+6	dBm

TT7000

FREQUENCY COUNTER SPECIFICATIONS

Conditions: 25° C, USB supplied power

Parameter	Min	Max	Typ	Units
Input Frequency Range	100	7000		MHz
Input Power Sensitivity	-25	+10	0	dBm
Input Impedance			50	Ohm
Input VSWR, 50 to 7000MHz	1.3:1	1.6:1	1.5:1	SWR
Internal 10MHz Time Base Stability			+/-280	PPB
Resolution @ 1sec Gate Time			1000	Hz
Gate Times (Front Panel Operation Only Supports 1sec Gate)	0.1	10	1	SEC

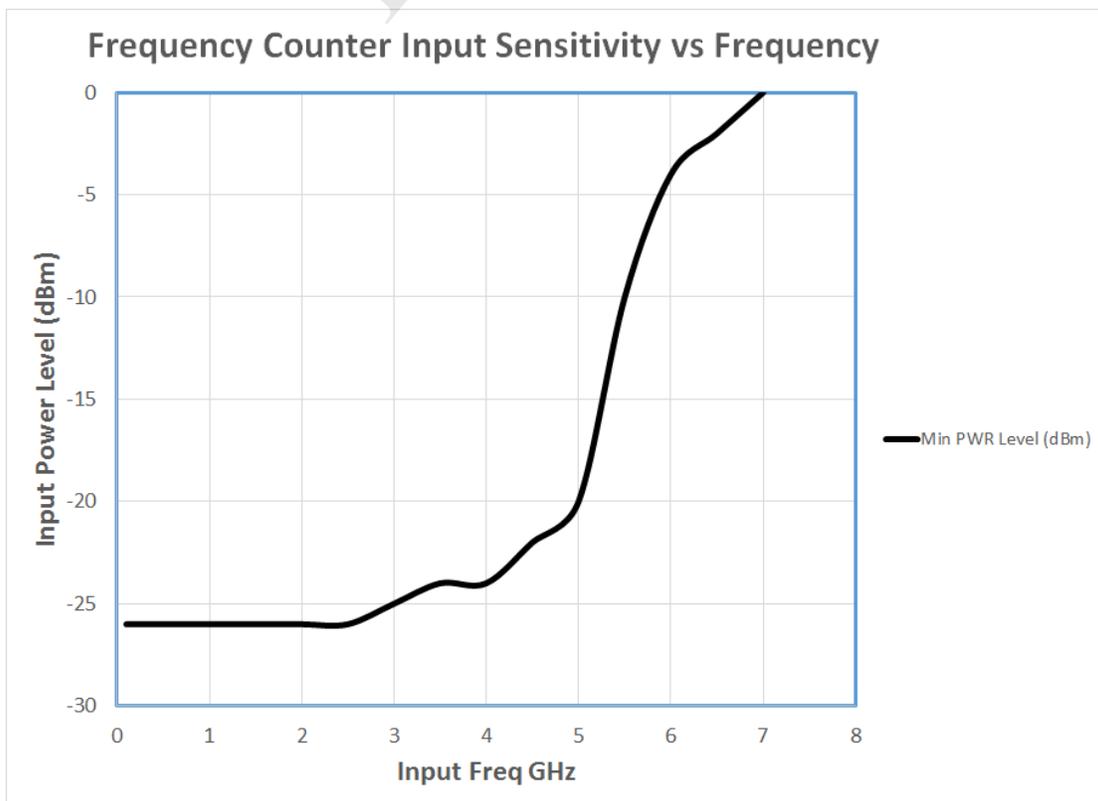

TT7000

POWER METER SPECIFICATIONS

Conditions: 25° C, USB supplied power

Parameter	Min	Max	Typ	Units
Input Frequency Range	50	7000		MHz
Input Power Range	-45	+6		dBm
Max Power Input		+10		dBm
Input Impedance			50	Ohm
Input VSWR, 50 to 7000MHz	1.3:1	1.8:1		SWR
Resolution			0.05	dB
Absolute Accuracy	±1.50		±0.75	dB

RF DIVIDER SPECIFICATIONS


Conditions: 25° C, USB supplied power

Parameter	Min	Max	Typ	Units
Input Frequency Range @ RF IN Jack	300	7000		MHz
Output Frequency Range @ RF OUT Jack	37.5	3500		MHz
Divide Ratios Available		1/2/4/8		---
Input Power Sensitivity	-10	+10	0	dBm
Input Impedance @ RF IN Jack			50	Ohm
Input VSWR, 300 to 7000MHz	1.2:1	1.6:1	1.4:1	SWR
Output Power @ RF Out Jack	+7	+14	+10	dBm
Output Impedance @ RF OUT Jack			50	Ohm
Output VSWR	1.3:1	1.6:1	1.25:1	SWR


TT7000

Typical Phase Noise

[25 Deg. C, USB Power]

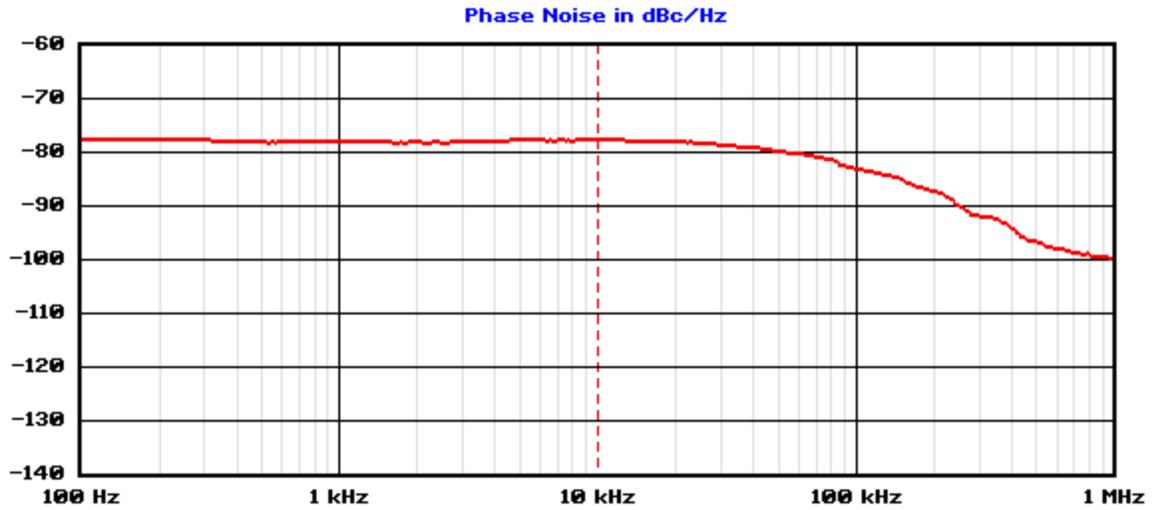


Carrier Hz	Carrier dBm	dBc/Hz at 10000 Hz	RF Atten dB	VBW/RBW	Sweep
9 600 000 000	7.60	-77.5	10	1.00	70s

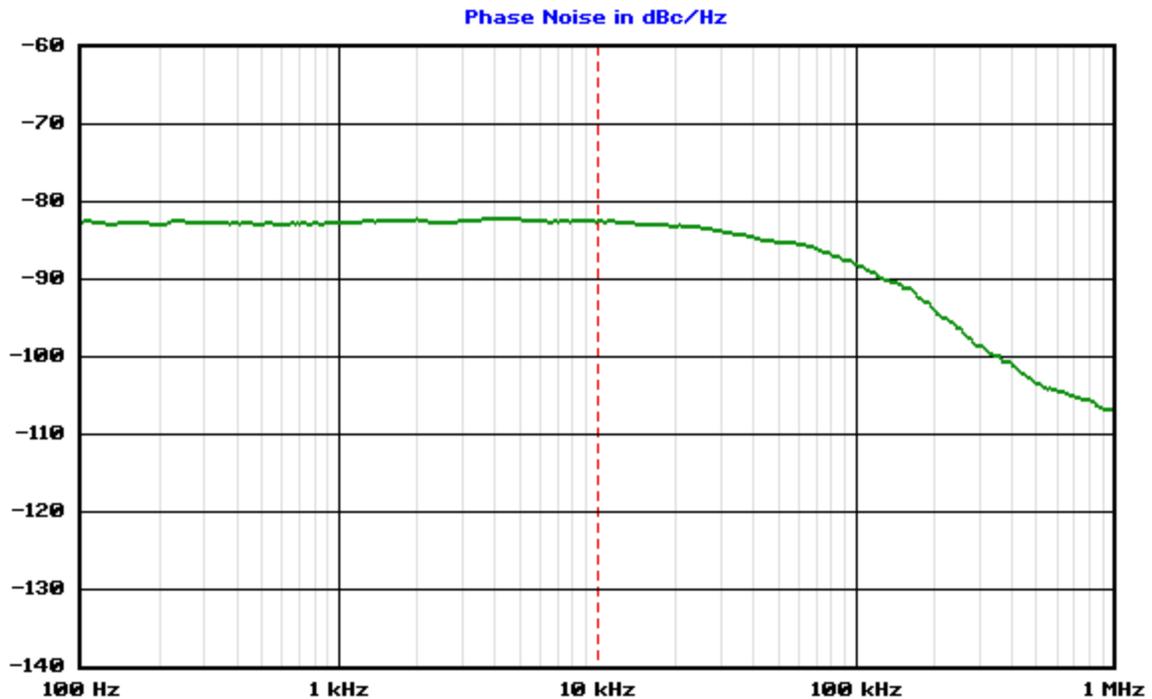

Carrier Hz	Carrier dBm	dBc/Hz at 10000 Hz	RF Atten dB	VBW/RBW	Sweep
4 800 000 000	9.80	-82.4	10	1.00	70s

TT7000


Windows Power Meter and Frequency Counter GUI via USB

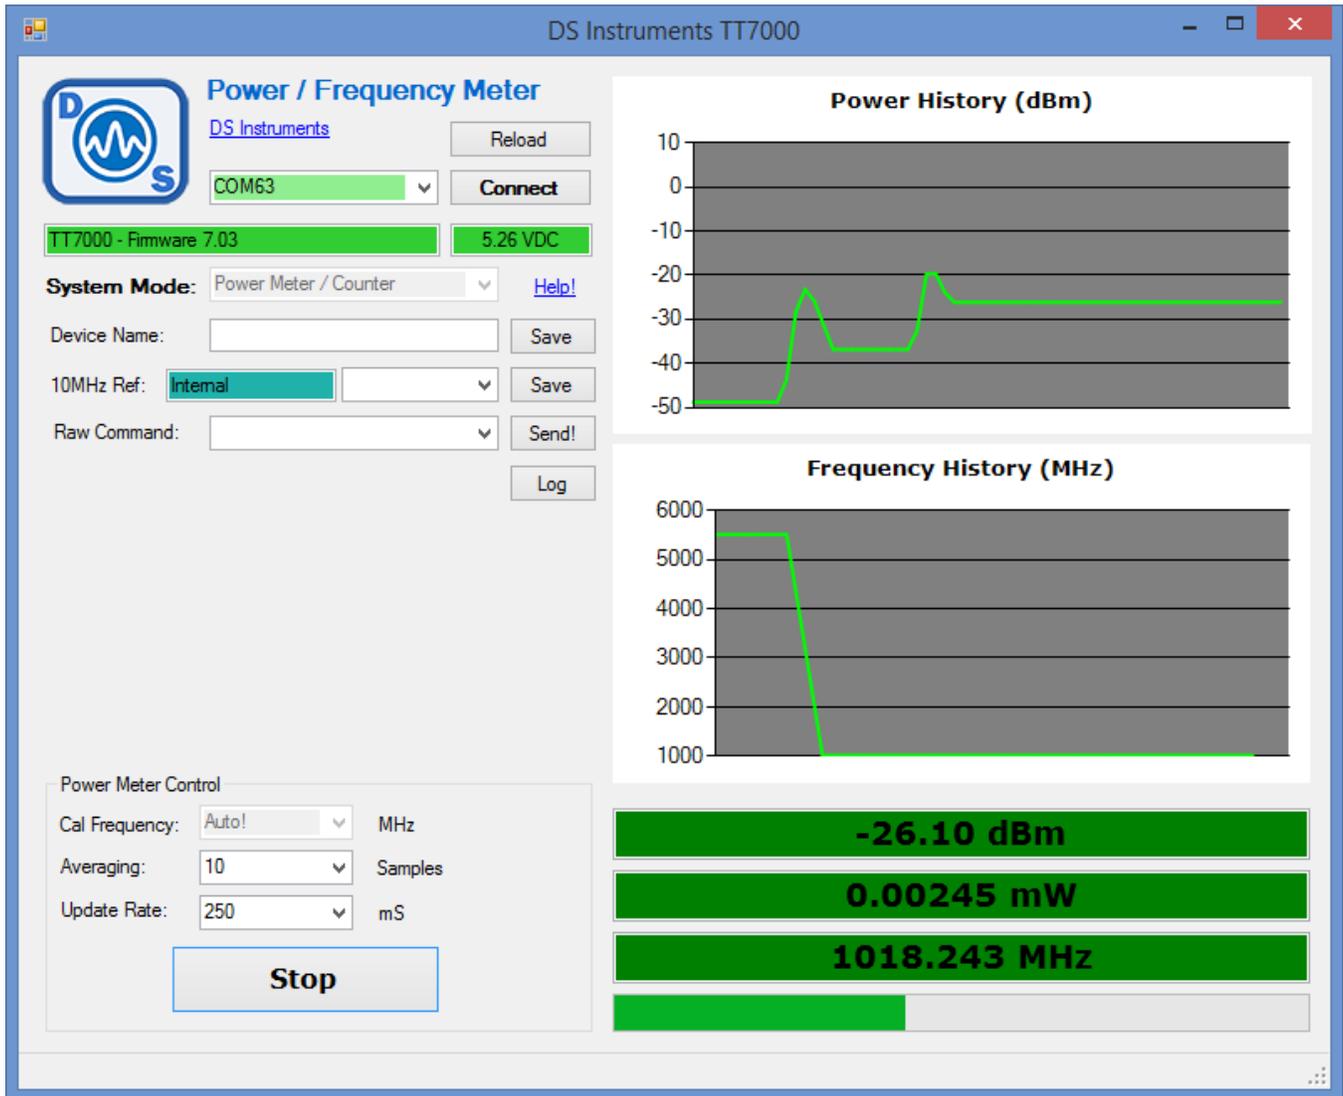

Power meter is automatically calibrated using the frequency counter. Both values are displayed and graphed in real time. Values are color-coded to indicate level of reliability and signal strength.

TT7000

Windows Signal Generator GUI via USB






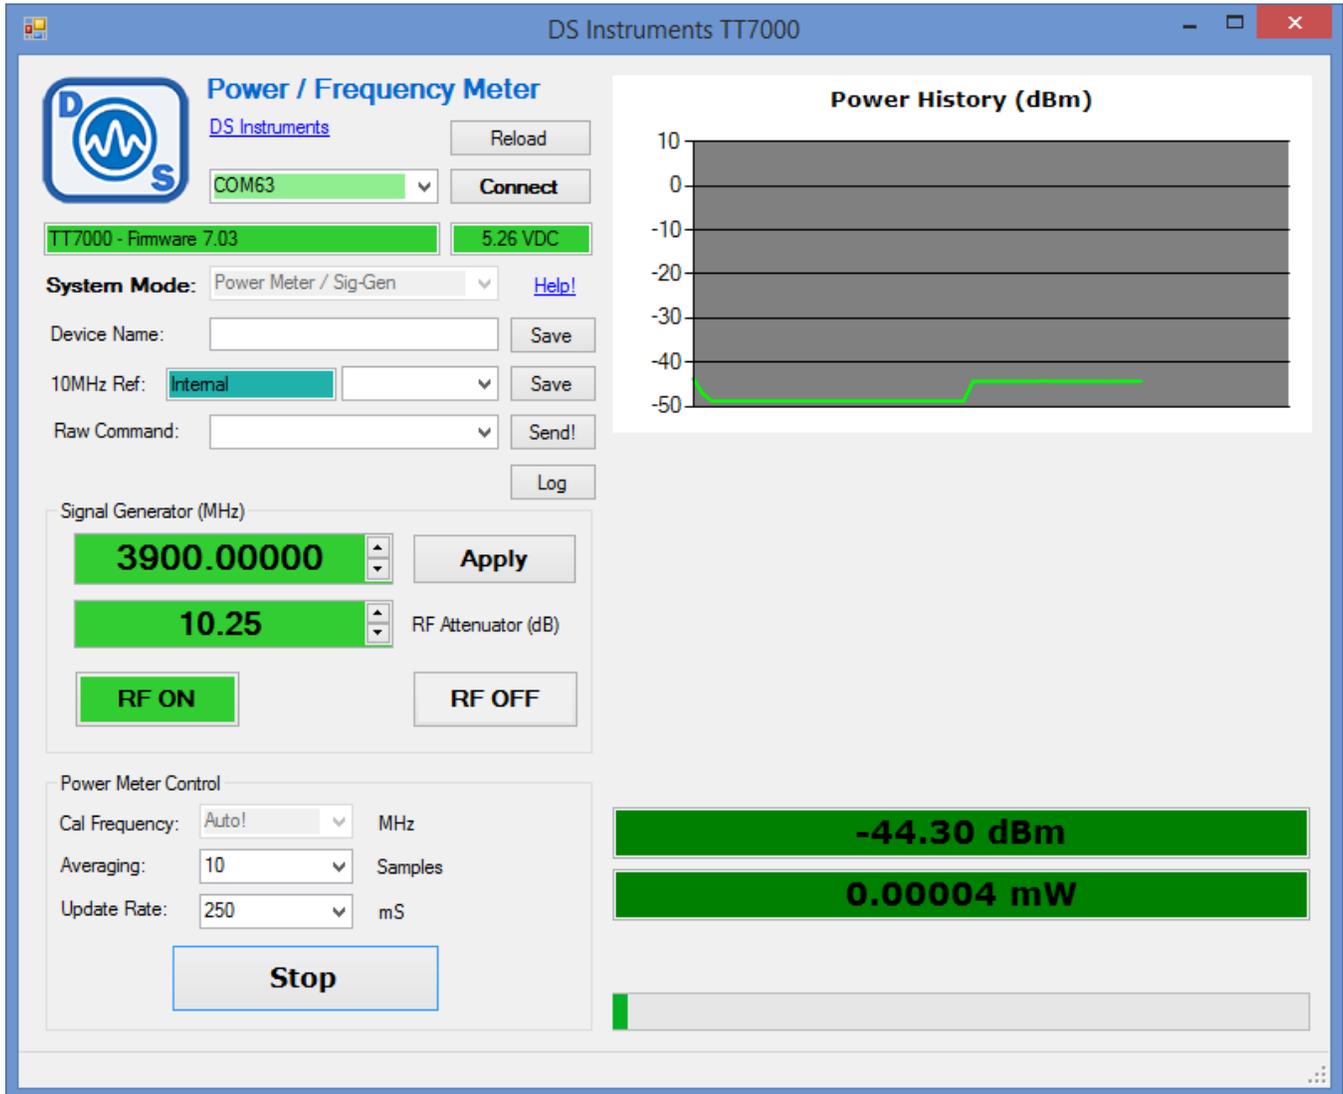


Step attenuation is available up to 4800MHz. Signal Generator and power meter can be used simultaneously.

TT7000

Typical Output Power Spectrums







[25 Deg. C, USB Power]

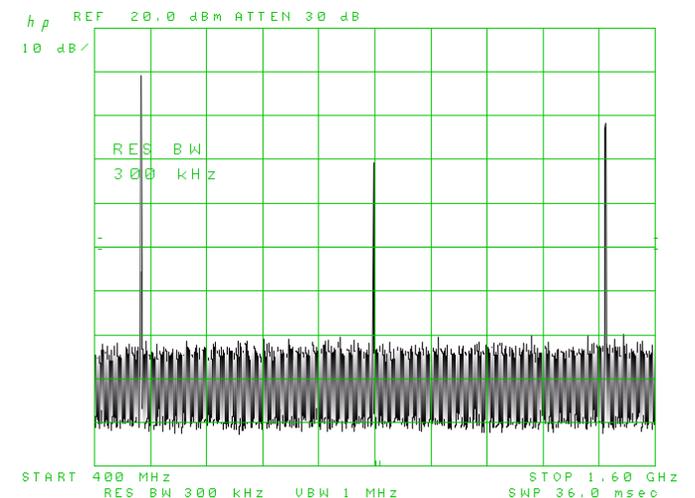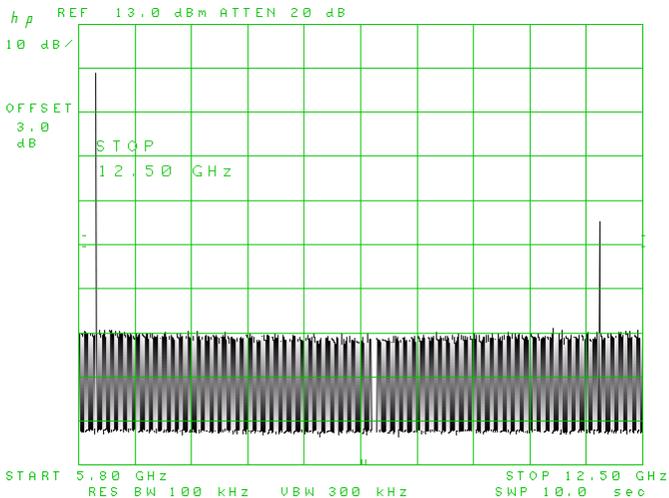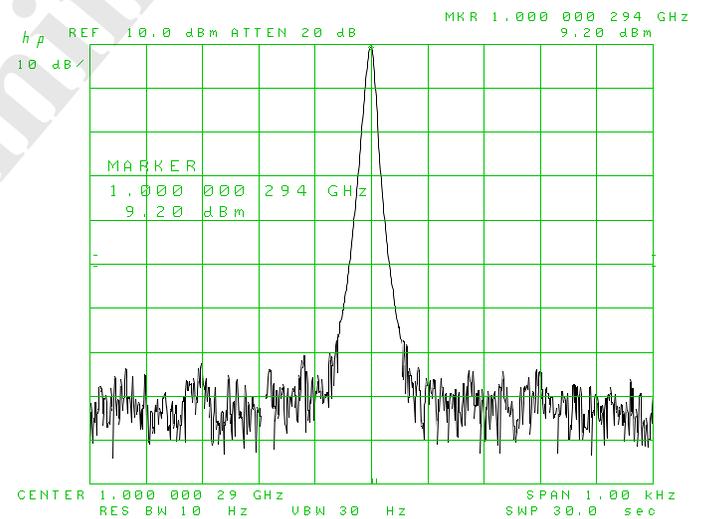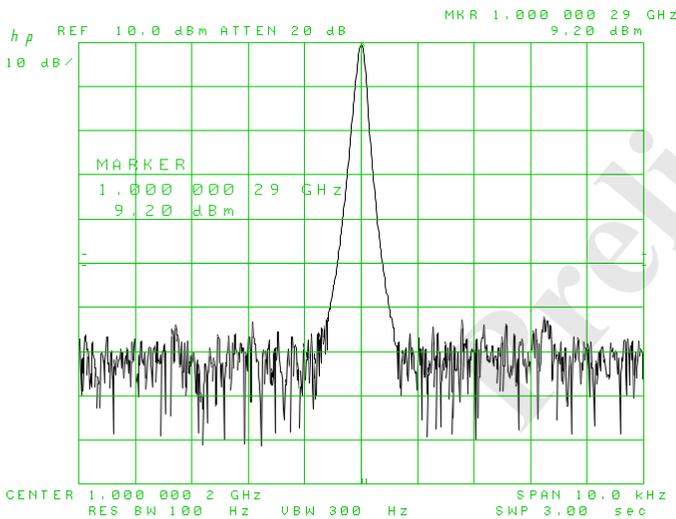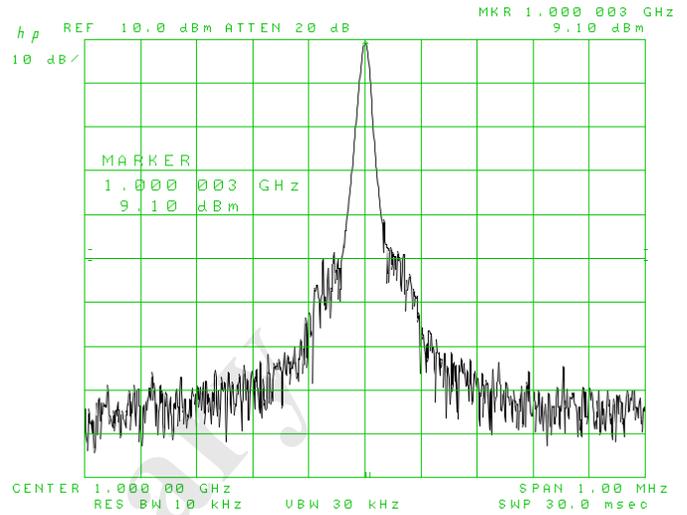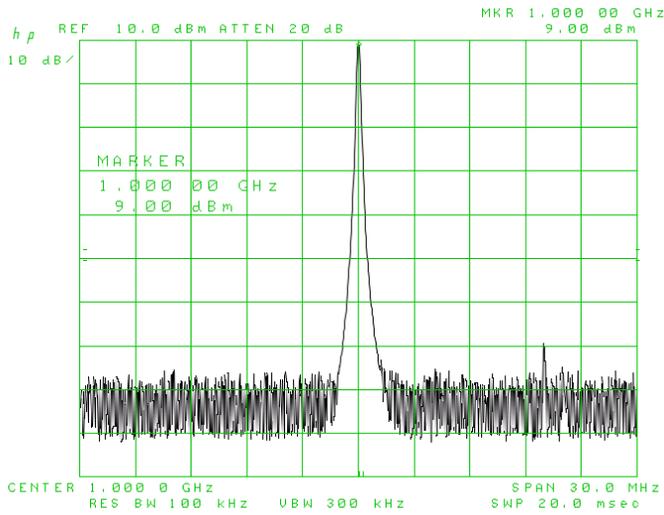

TT7000

Typical Output Power Spectrums, Cont.







[25 Deg. C, USB Power]

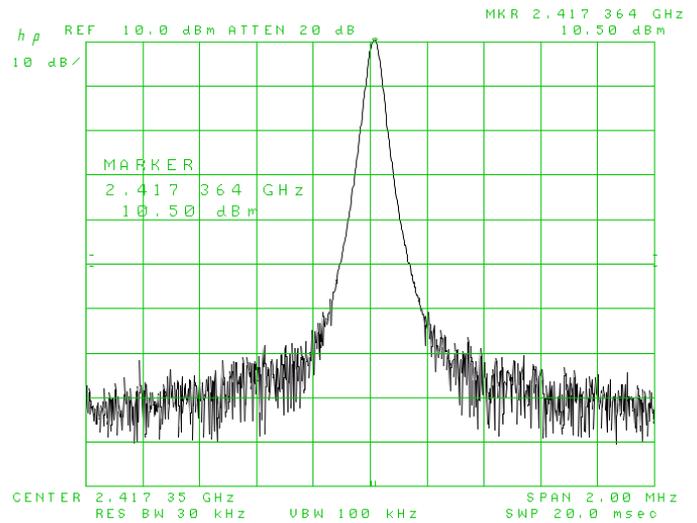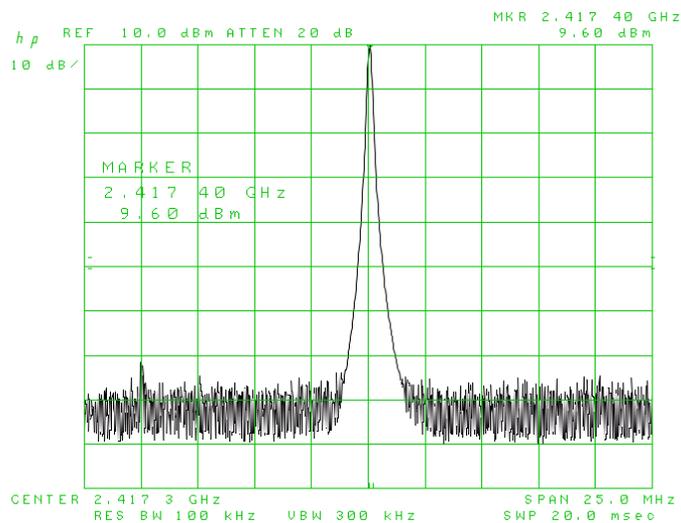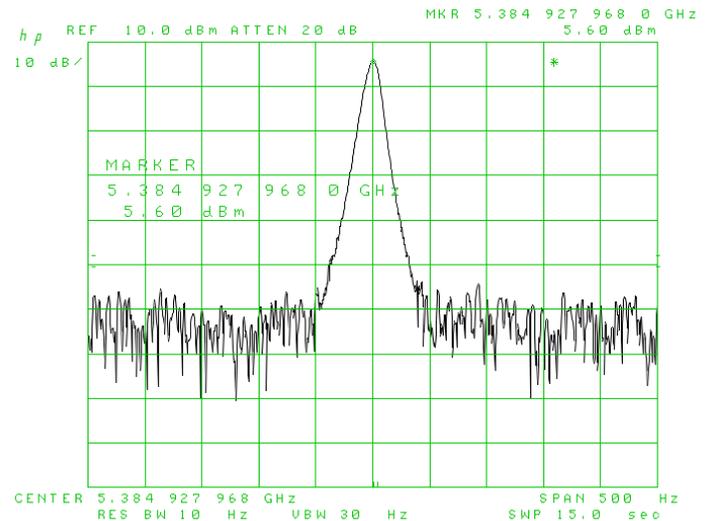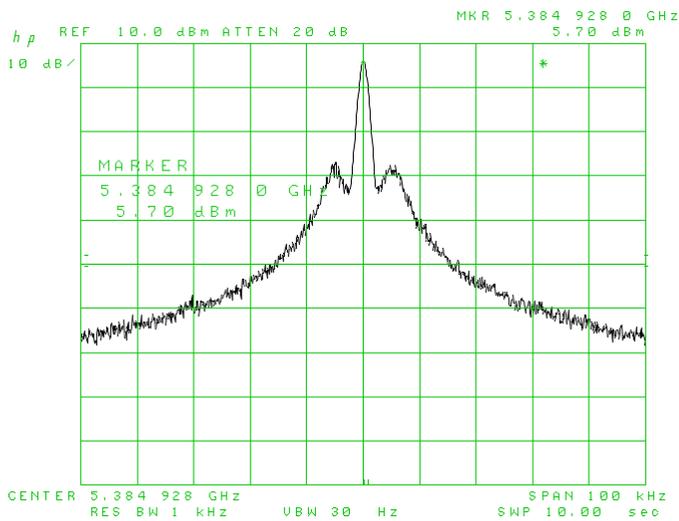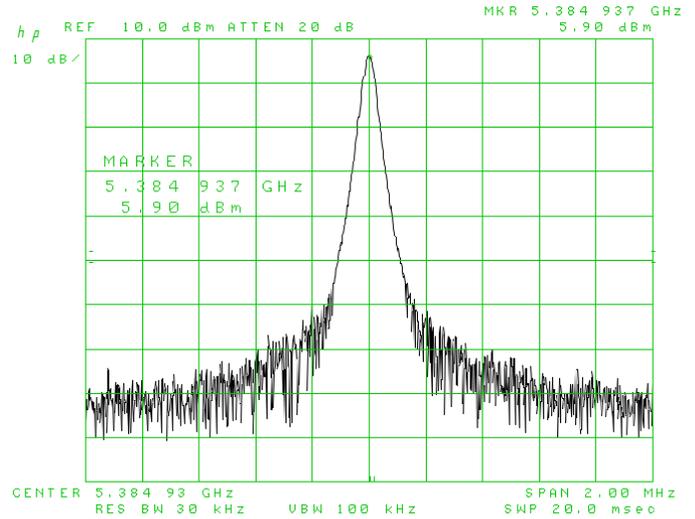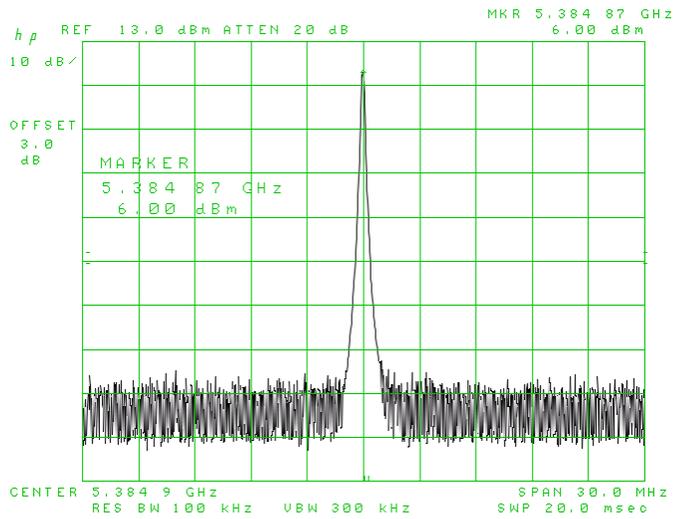

TT7000

Typical Output Power Spectrums, Cont.

[25 Deg. C, USB Power]

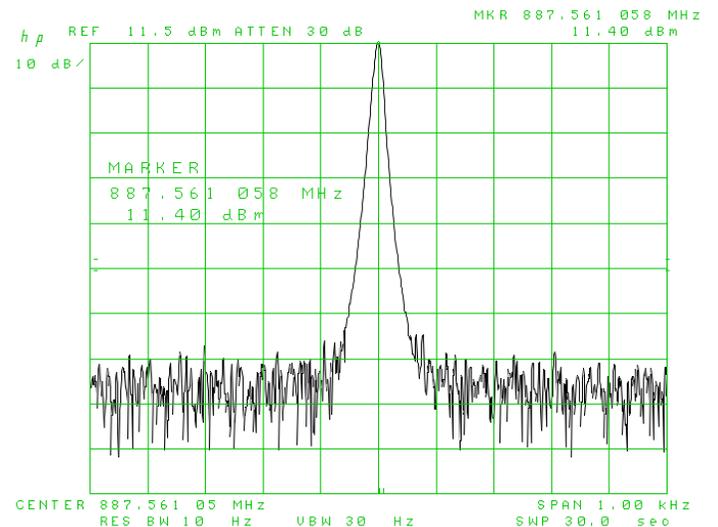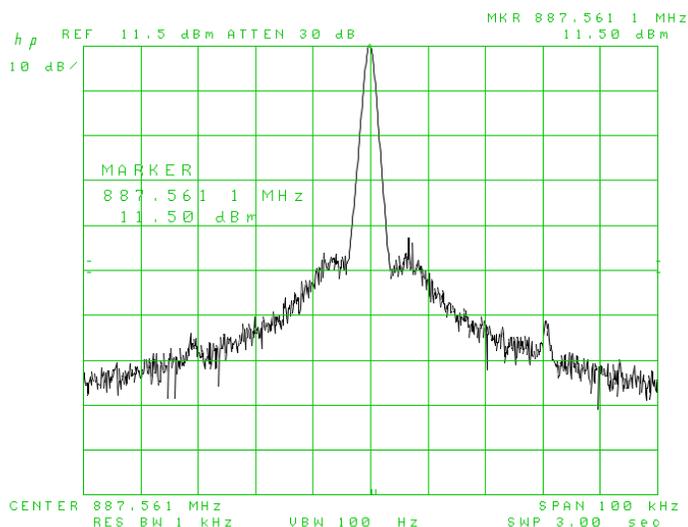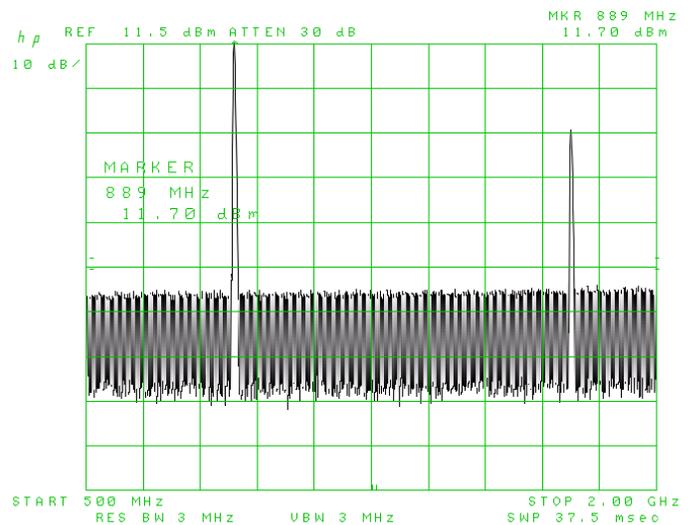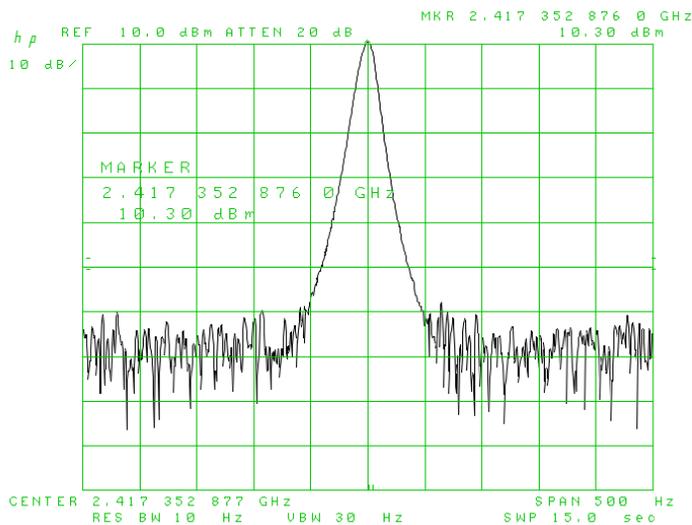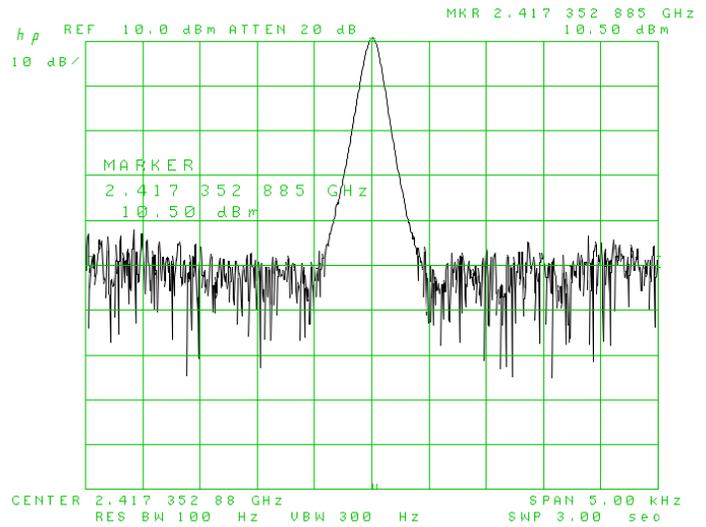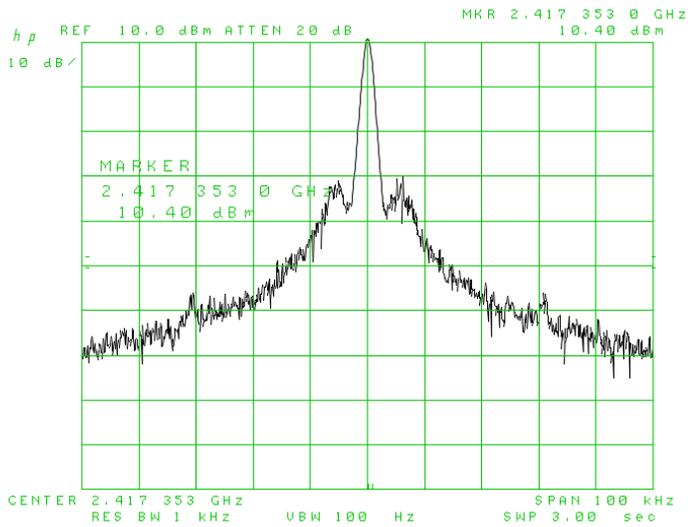

TT7000

Ordering Information

TT7000 Rev4 – Meter / Counter / Generator \$995.00

MADE IN



U. S. A.