



Coaxial 20W 0° 8-Way Power Divider 18 - 40GHz



Note: The photo is for illustration purposes only.
Please refer to the outline drawing.

Features

- High power handling up to 20W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss

Typical Applications

- Aerospace and military applications
- Test and Measurement
- Wireless Infrastructure

Coaxial 20W 0° 8-Way Power Divider 18 - 40GHz

Electrical Specifications, $T_A=25\text{ }^\circ\text{C}$

Parameters		Min.	Typ.	Max.	Units
Frequency Range		18		40	GHz
Nominal Splitter Loss			9		dB
Insertion Loss			2.2	2.5	dB
Isolation		16	18		dB
Input VSWR			1.8	2.0	: 1
Output VSWR			1.5	1.6	: 1
Amplitude Imbalance			±0.4	±0.5	dB
Phase Imbalance			±5	±6	deg
Power Rating	Forward Power	20			W
	Reverse Power	1			W
	Peak Power	100			W
Impedance		50			Ohms
Weight		-			ounces
Input / Output Connectors		2.92mm - Female			
Material		Aluminum			
Finish		Blue paint			



Environmental Specifications and Test Standards


Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude		Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883	MIL-STD-883 (For Hermetically Sealed Units)



Outline Drawing:

All Dimensions in mm [inches]

Tolerance ± 0.25 [0.01]

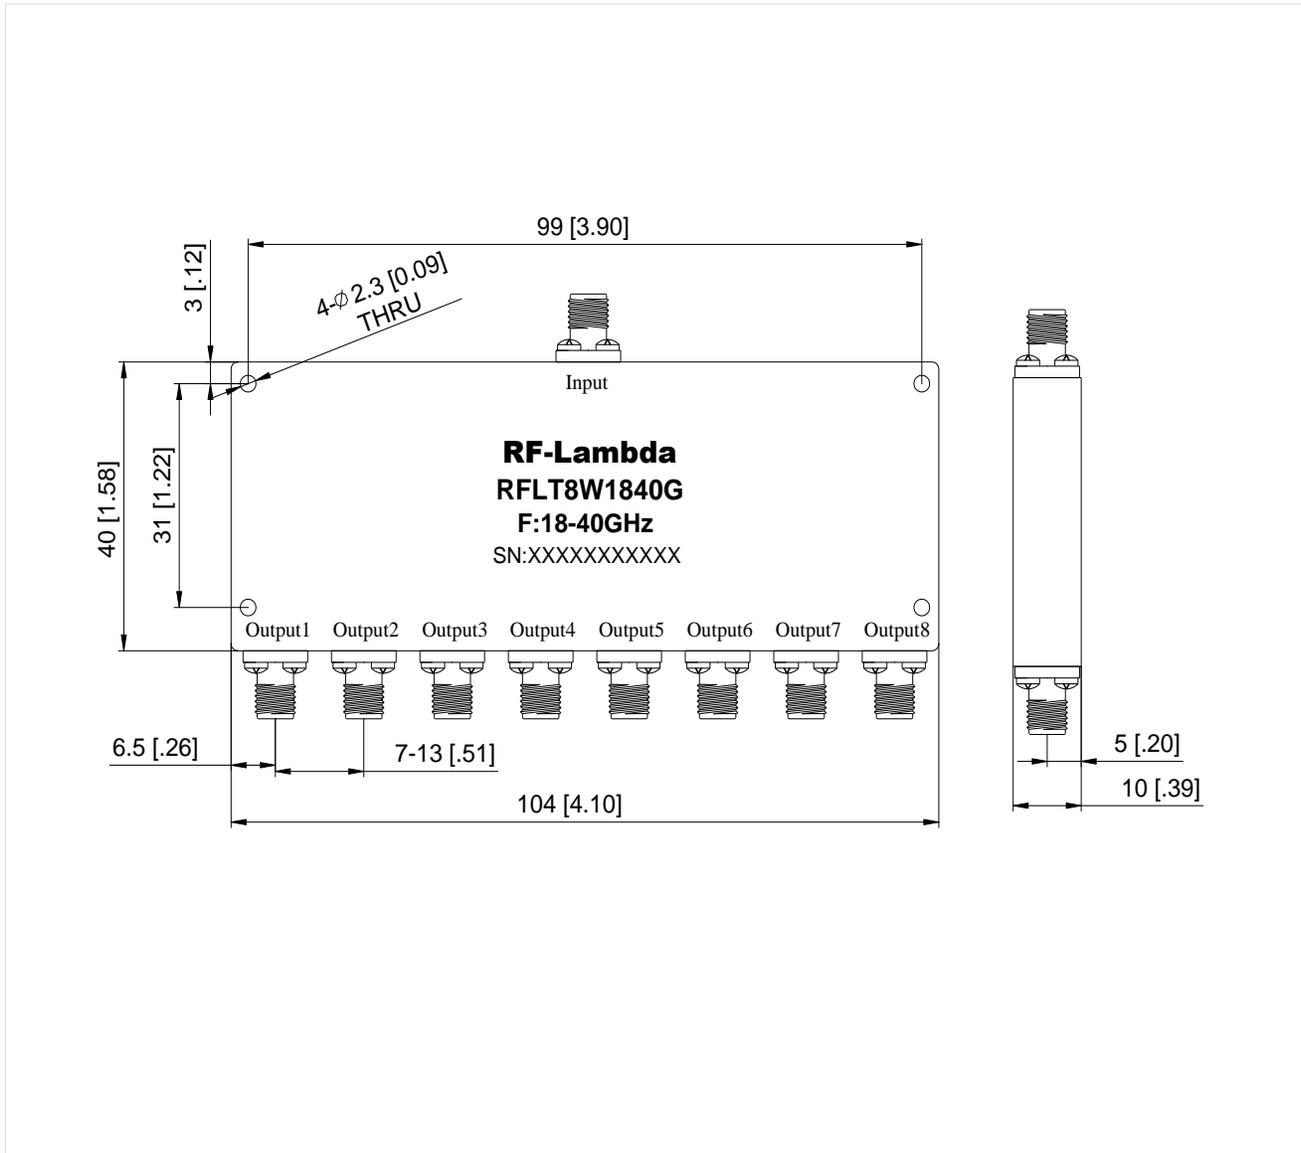

Coaxial 20W 0° 8-Way Power Divider 18 - 40GHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.