



ADC322x 双通道、12 位、25MSPS 至 125MSPS 模数转换器

1 特性

- 双通道
- 12 位分辨率
- 单电源：1.8V
- 串行 LVDS 接口 (SLVDS)
- 支持 1 分频、2 分频和 4 分频的灵活输入时钟缓冲器
- $f_{IN} = 70\text{MHz}$ 时，信噪比 (SNR) = 70.2dBFS，无杂散动态范围 (SFDR) = 87dBc
- 超低功耗：
 - 125MSPS 时为每通道 116mW
- 通道隔离：105dB
- 内部抖动和斩波
- 支持多芯片同步
- 与 14 位版本器件引脚到引脚兼容
- 封装：超薄四方扁平无引线 (VQFN)-48 (7mm x 7mm)

2 应用

- 多载波、多模式蜂窝基站
- 雷达和智能天线阵列
- 炮弹制导
- 电机控制反馈
- 网络和矢量分析器
- 通信测试设备
- 无损检测
- 微波接收器
- 软件定义无线电 (SDR)
- 正交和分集无线电接收器
- 手持式无线电和仪表

3 说明

ADC322x 属于高线性度、超低功耗、双通道、12 位、25MSPS 至 125MSPS 模数转换器 (ADC) 系列。此类器件专门设计用于支持具有宽动态范围需求且要求苛刻的高输入频率信号。当 SYSREF 输入实现整个系统同步时，时钟输入分频器将给予系统时钟架构设计更高的灵活性。ADC322x 系列支持串行低压差分信号 (LVDS)，从而减少接口线路的数量，实现高系统集成度。串行 LVDS 接口为双线制，通过两个 LVDS 对串行输出每个 ADC 数据。内部锁相环 (PLL) 会将传入的 ADC 采样时钟加倍，以获得串行输出各通道的 12 位输出数据时所使用的位时钟。除了串行数据流之外，数据帧和位时钟也作为 LVDS 输出进行传送。

器件信息⁽¹⁾

器件型号	封装	封装尺寸 (标称值)
ADC322x	VQFN (48)	7.00mm x 7.00mm


(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。



ADC3221, ADC3222, ADC3223, ADC3224

ZHCSEU3B – JULY 2014 – REVISED MARCH 2016

www.ti.com.cn

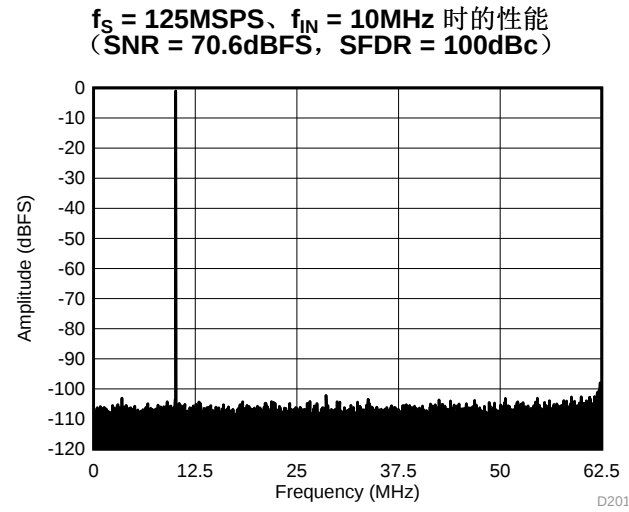

目录

1	特性	1	7.19	Typical Characteristics: Common	40
2	应用	1	7.20	Typical Characteristics: Contour	41
3	说明	1	8	Parametric Measurement Information	42
4	修订历史记录	3	8.1	Timing Diagrams	42
5	Device Comparison Table	5	9	Detailed Description	44
6	Pin Configuration and Functions	5	9.1	Overview	44
7	Specifications	7	9.2	Functional Block Diagram	44
7.1	Absolute Maximum Ratings	7	9.3	Feature Description	45
7.2	ESD Ratings	7	9.4	Device Functional Modes	49
7.3	Recommended Operating Conditions	7	9.5	Programming	50
7.4	Thermal Information	8	9.6	Register Maps	54
7.5	Electrical Characteristics: ADC3221, ADC3222	8	10	Applications and Implementation	65
7.6	Electrical Characteristics: ADC3223, ADC3224	8	10.1	Application Information	65
7.7	Electrical Characteristics: General	9	10.2	Typical Applications	66
7.8	AC Performance: ADC3221	10	11	Power-Supply Recommendations	68
7.9	AC Performance: ADC3222	12	12	Layout	69
7.10	AC Performance: ADC3223	14	12.1	Layout Guidelines	69
7.11	AC Performance: ADC3224	16	12.2	Layout Example	69
7.12	Digital Characteristics	18	13	器件和文档支持	70
7.13	Timing Requirements: General	18	13.1	相关链接	70
7.14	Timing Requirements: LVDS Output	19	13.2	社区资源	70
7.15	Typical Characteristics: ADC3221	20	13.3	商标	70
7.16	Typical Characteristics: ADC3222	25	13.4	静电放电警告	70
7.17	Typical Characteristics: ADC3223	30	13.5	Glossary	70
7.18	Typical Characteristics: ADC3224	35	14	机械、封装和可订购信息	70

4 修订历史记录

Changes from Revision A (March 2015) to Revision B

Page

• Added <i>Digital Inputs</i> section to Digital Characteristics table	18
• Updated Figure 19 , Figure 20 , Figure 23 , Figure 24 , Figure 25 and, Figure 26	23
• Updated Figure 50 , Figure 53 , Figure 54 , Figure 55 , and Figure 56	28
• Updated Figure 79 , Figure 80 , Figure 83 , Figure 84 , Figure 85 , and Figure 86	33
• Updated Figure 109 , Figure 110 , Figure 113 , Figure 114 , Figure 115 , and Figure 116	38
• Changed conditions of Figure 122 and Figure 124	40
• Changed Figure 129	42
• Changed <i>SNR and Clock Jitter</i> section: changed typical thermal noise value in description of and changed Figure 137 to reflect updated thermal noise value	46
• Changed Table 3	47
• Changed <i>Lane</i> to <i>Wire</i> in Figure 138	48
• Changed <i>Register Map Summary</i> table: changed <i>FLIP BITS</i> to <i>FLIP WIRE</i> in register 04h, changed bit 7 in register 70Ah, and added register 13h	54
• Changed Summary of Special Mode Registers section: changed title, moved section to correct location	55
• Changed <i>lane</i> to <i>wire</i> in register 03h description	55
• Changed register 04h: changed <i>FLIP BITS</i> to <i>FLIP WIRE</i> and changed description of bit 0	56
• Changed register 0Ah and 0Bh descriptions	58
• Added register 13h	59
• Changed register 70Ah to include the DIS CLK FILT register bit	64

ADC3221, ADC3222, ADC3223, ADC3224

ZHCSEU3B – JULY 2014 – REVISED MARCH 2016


www.ti.com.cn**Changes from Original (July 2014) to Revision A****Page**

• 已发布为量产数据	1
------------------	-------------------

5 Device Comparison Table

INTERFACE	RESOLUTION (Bits)	25 MSPS	50 MSPS	80 MSPS	125 MSPS	160 MSPS
Serial LVDS	12	ADC3221	ADC3222	ADC3223	ADC3224	—
	14	ADC3241	ADC3242	ADC3243	ADC3244	—
JESD204B	12	—	ADC32J22	ADC32J23	ADC32J24	ADC32J2x5
	14	—	ADC32J42	ADC32J43	ADC32J44	ADC32J45

6 Pin Configuration and Functions

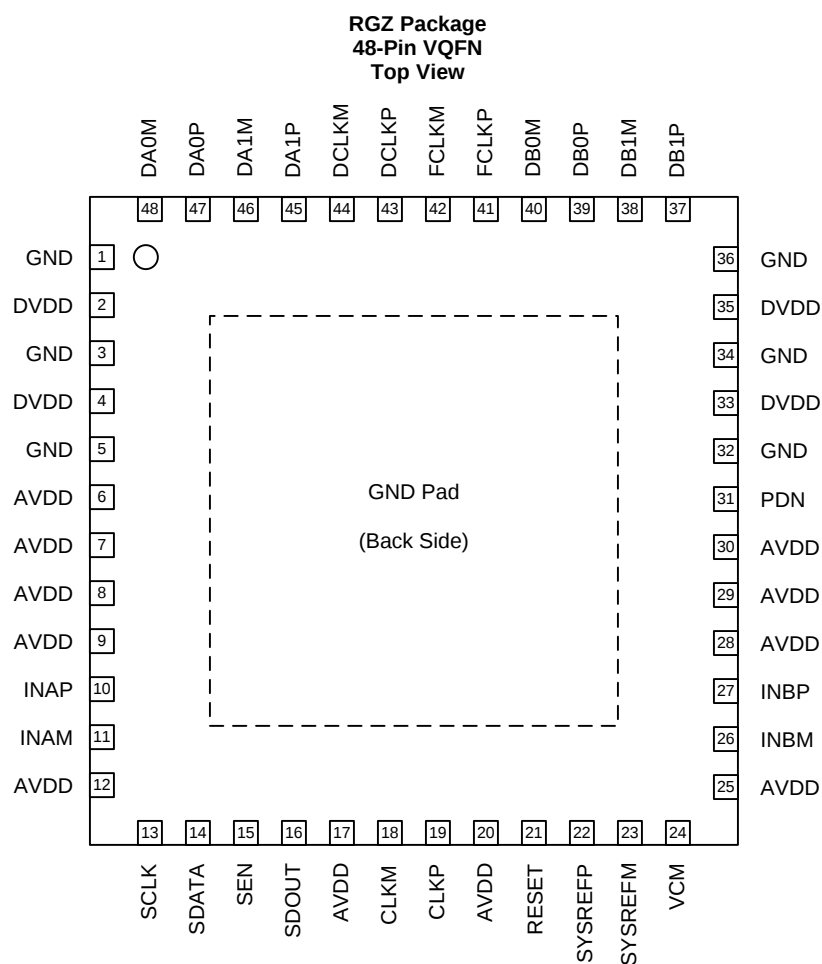

ADC3221, ADC3222, ADC3223, ADC3224

ZHCSEU3B – JULY 2014 – REVISED MARCH 2016

www.ti.com.cn
Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
AVDD	6-9, 12, 17, 20, 25, 28-30	I	Analog 1.8-V power supply
CLKM	18	I	Negative differential clock input for the ADC
CLKP	19	I	Positive differential clock input for the ADC
DA0M	48	O	Negative serial LVDS output for channel A0
DA0P	47	O	Positive serial LVDS output for channel A0
DA1M	46	O	Negative serial LVDS output for channel A1
DA1P	45	O	Positive serial LVDS output for channel A1
DB0M	40	O	Negative serial LVDS output for channel B0
DB0P	39	O	Positive serial LVDS output for channel B0
DB1M	38	O	Negative serial LVDS output for channel B1
DB1P	37	O	Positive serial LVDS output for channel B1
DCLKM	44	O	Negative bit clock output
DCLKP	43	O	Positive bit clock output
DVDD	2, 4, 33, 35	I	Digital 1.8-V power supply
FCLKM	42	O	Negative frame clock output
FCLKP	41	O	Positive frame clock output
GND	1, 3, 5, 32, 34, 36, PowerPAD™	I	Ground, 0 V
INAM	11	I	Negative differential analog input for channel A
INAP	10	I	Positive differential analog input for channel A
INBM	26	I	Negative differential analog input for channel B
INBP	27	I	Positive differential analog input for channel B
PDN	31	I	Power-down control. This pin can be configured via the SPI. This pin has an internal 150-kΩ pull-down resistor.
RESET	21	I	Hardware reset; active high. This pin has an internal 150-kΩ pull-down resistor.
SCLK	13	I	Serial interface clock input. This pin has an internal 150-kΩ pull-down resistor.
SDATA	14	I	Serial interface data input. This pin has an internal 150-kΩ pull-down resistor.
SDOUT	16	O	Serial interface data output
SEN	15	I	Serial interface enable; active low. This pin has an internal 150-kΩ pull-up resistor to AVDD.
SYSREFM	23	I	Negative external SYSREF input
SYSREFP	22	I	Positive external SYSREF input
VCM	24	O	Common-mode voltage for analog inputs

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Analog supply voltage range, AVDD		−0.3	2.1	V
Digital supply voltage range, DVDD		−0.3	2.1	V
Voltage applied to input pins	INAP, INBP, INAM, INBM	−0.3	min (1.9, AVDD + 0.3)	V
	CLKP, CLKM	−0.3	AVDD + 0.3	
	SYSREFP, SYSREFM	−0.3	AVDD + 0.3	
	SCLK, SEN, SDATA, RESET, PDN	−0.3	3.9	
Temperature	Operating free-air, T _A	−40	85	°C
	Operating junction, T _J		125	
	Storage, T _{stg}	−65	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
SUPPLIES					
AVDD	Analog supply voltage range	1.7	1.8	1.9	V
DVDD	Digital supply voltage range	1.7	1.8	1.9	V
ANALOG INPUT					
V _{ID}	Differential input voltage	For input frequencies < 450 MHz	2		V _{PP}
		For input frequencies < 600 MHz	1		
V _{IC}	Input common-mode voltage	VCM ± 0.025			V
CLOCK INPUT					
Input clock frequency		Sampling clock frequency	15 ⁽²⁾	125 ⁽³⁾	MSPS
Input clock amplitude (differential)	Sine wave, ac-coupled		0.2	1.5	V _{PP}
	LVPECL, ac-coupled		1.6		
	LVDS, ac-coupled		0.7		
Input clock duty cycle			35%	50%	65%
Input clock common-mode voltage			0.95		V
DIGITAL OUTPUTS					
C _{LOAD}	Maximum external load capacitance from each output pin to GND		3.3		pF
R _{LOAD}	Differential load resistance placed externally		100		Ω

- (1) To reset the device for the first time after power-up, only use the RESET pin; see the [Register Initialization](#) section.
(2) See [Table 3](#) for details.
(3) With the clock divider enabled by default for divide-by-1. Maximum sampling clock frequency for the divide-by-4 option is 500 MSPS.

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		ADC322x	UNIT
		RGZ (VQFN)	
		48 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	25.7	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	18.9	°C/W
R _{θJB}	Junction-to-board thermal resistance	3.0	°C/W
ψ _{JT}	Junction-to-top characterization parameter	0.2	°C/W
ψ _{JB}	Junction-to-board characterization parameter	3	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	0.5	°C/W

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

7.5 Electrical Characteristics: ADC3221, ADC3222

typical values are over the operating free-air temperature range, at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, maximum sampling rate, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted)

PARAMETER	ADC3241			ADC3242			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	
ADC clock frequency			125			125	MSPS
1.8-V analog supply current		31	71		39	81	mA
1.8-V digital supply current		35	65		43	75	mA
Total power dissipation		118	205		147	245	mW
Global power-down dissipation		5	17		5	17	mW
Standby power-down dissipation		78	103		78	103	mW

7.6 Electrical Characteristics: ADC3223, ADC3224

typical values are over the operating free-air temperature range, at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, maximum sampling rate, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted)

PARAMETER	ADC3243			ADC3244			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	
ADC clock frequency			80			125	MSPS
1.8-V analog supply current		50	91		65	106	mA
1.8-V digital supply current		52	85		64	95	mA
Total power dissipation		183	285		233	325	mW
Global power-down dissipation		5	17		5	17	mW
Standby power-down dissipation		72	103		78	103	mW

7.7 Electrical Characteristics: General

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, maximum sampling rate, 50% clock duty cycle, $AVDD = DVDD = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
RESOLUTION						
Resolution			12			Bits
ANALOG INPUT						
Differential input full-scale				2.0		V_{PP}
R_{IN}	Input resistance	Differential at dc		6.6		$\text{k}\Omega$
C_{IN}	Input capacitance	Differential at dc		3.7		pF
$V_{\text{OC(VCM)}}$	VCM common-mode voltage output			0.95		V
VCM output current capability				10		mA
Input common-mode current		Per analog input pin		1.5		$\mu\text{A/MSPS}$
Analog input bandwidth (3 dB)		50- Ω differential source driving 50- Ω termination across INP and INM		540		MHz
DC ACCURACY						
E_{O}	Offset error		-25		25	mV
α_{EO}	Temperature coefficient of offset error			± 0.024		mV/C
$E_{\text{G(REF)}}$	Gain error as a result of internal reference inaccuracy alone		-2%		2%	
$E_{\text{G(CHAN)}}$	Gain error of channel alone			-2		%FS
$\alpha_{\text{(EGCHAN)}}$	Temperature coefficient of $E_{\text{G(CHAN)}}$			± 0.008		$\Delta\% \text{FS}/^\circ\text{C}$
CHANNEL-TO-CHANNEL ISOLATION						
Crosstalk ⁽¹⁾		$f_{\text{IN}} = 10\text{ MHz}$		105		dB
		$f_{\text{IN}} = 100\text{ MHz}$		105		
		$f_{\text{IN}} = 200\text{ MHz}$		105		
		$f_{\text{IN}} = 230\text{ MHz}$		105		
		$f_{\text{IN}} = 300\text{ MHz}$		105		

(1) Crosstalk is measured with a -1-dBFS input signal on one channel and no input on the other channel.

7.8 AC Performance: ADC3221

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3221 (f _S = 25 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio (from 1-MHz offset)	f _{IN} = 10 MHz	70.9			71.2			dBFS
		f _{IN} = 20 MHz	68.5	70.8		71.1			
		f _{IN} = 70 MHz	70.6			70.9			
		f _{IN} = 100 MHz	70.3			70.6			
		f _{IN} = 170 MHz	69.7			69.9			
		f _{IN} = 230 MHz	68.8			69			
	Signal-to-noise ratio (full Nyquist band)	f _{IN} = 10 MHz	70.2			70.6			dBFS
		f _{IN} = 20 MHz	70.2			70.5			
		f _{IN} = 70 MHz	69.9			70.2			
		f _{IN} = 100 MHz	69.6			69.9			
		f _{IN} = 170 MHz	69.2			69.3			
		f _{IN} = 230 MHz	68.2			68.4			
NSD ⁽¹⁾	Noise spectral density (averaged across Nyquist zone)	f _{IN} = 10 MHz	−141.9			−142.2			dBFS/Hz
		f _{IN} = 20 MHz	−141.8			−139.5	−142.1		
		f _{IN} = 70 MHz	−141.6			−141.9			
		f _{IN} = 100 MHz	−141.3			−141.6			
		f _{IN} = 170 MHz	−140.7			−140.9			
		f _{IN} = 230 MHz	−139.8			−140.0			
SINAD ⁽¹⁾	Signal-to-noise and distortion ratio	f _{IN} = 10 MHz	70.9			71.1			dBFS
		f _{IN} = 20 MHz	68.1	70.8		71			
		f _{IN} = 70 MHz	70.6			70.7			
		f _{IN} = 100 MHz	70.2			70.3			
		f _{IN} = 170 MHz	69.6			69.6			
		f _{IN} = 230 MHz	68.5			68.5			
ENOB ⁽¹⁾	Effective number of bits	f _{IN} = 10 MHz	11.5			11.5			Bits
		f _{IN} = 20 MHz	11	11.5		11.5			
		f _{IN} = 70 MHz	11.4			11.5			
		f _{IN} = 100 MHz	11.4			11.4			
		f _{IN} = 170 MHz	11.3			11.3			
		f _{IN} = 230 MHz	11.1			11.1			
SFDR	Spurious-free dynamic range	f _{IN} = 10 MHz	96			88			dBc
		f _{IN} = 20 MHz	82	93		89			
		f _{IN} = 70 MHz	93			87			
		f _{IN} = 100 MHz	85			82			
		f _{IN} = 170 MHz	86			83			
		f _{IN} = 230 MHz	81			80			

(1) Reported from a 1-MHz offset.

AC Performance: ADC3221 (continued)

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, $\text{AVDD} = \text{DVDD} = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3221 (f _S = 25 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
HD2	Second-order harmonic distortion	f _{IN} = 10 MHz		106			97		dBc
		f _{IN} = 20 MHz	82	102			95		
		f _{IN} = 70 MHz		101			95		
		f _{IN} = 100 MHz		95			93		
		f _{IN} = 170 MHz		88			87		
		f _{IN} = 230 MHz		81			81		
HD3	Third-order harmonic distortion	f _{IN} = 10 MHz		96			88		dBc
		f _{IN} = 20 MHz	82	93			92		
		f _{IN} = 70 MHz		93			87		
		f _{IN} = 100 MHz		85			82		
		f _{IN} = 170 MHz		87			83		
		f _{IN} = 230 MHz		82			80		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f _{IN} = 10 MHz		99			92		dBc
		f _{IN} = 20 MHz	87	101			91		
		f _{IN} = 70 MHz		99			93		
		f _{IN} = 100 MHz		98			92		
		f _{IN} = 170 MHz		99			92		
		f _{IN} = 230 MHz		97			93		
THD	Total harmonic distortion	f _{IN} = 10 MHz		94			85		dBc
		f _{IN} = 20 MHz	80	92			85		
		f _{IN} = 70 MHz		91			85		
		f _{IN} = 100 MHz		86			82		
		f _{IN} = 170 MHz		84			81		
		f _{IN} = 230 MHz		78			77		
IMD3	Two-tone, third-order intermodulation distortion	f _{IN1} = 45 MHz, f _{IN2} = 50 MHz		−95			−94		dBFS
		f _{IN1} = 185 MHz, f _{IN2} = 190 MHz		−90			−89		

7.9 AC Performance: ADC3222

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3222 (f _S = 50 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio (from 1-MHz offset)	f _{IN} = 10 MHz	70.9			71.1			dBFS
		f _{IN} = 20 MHz	68.5	70.9		71.1			
		f _{IN} = 70 MHz	70.7			70.9			
		f _{IN} = 100 MHz	70.5			70.7			
		f _{IN} = 170 MHz	70			70.1			
		f _{IN} = 230 MHz	69.3			69.6			
	Signal-to-noise ratio (full Nyquist band)	f _{IN} = 10 MHz	70.3			70.5			
		f _{IN} = 20 MHz	70.1			70.3			
		f _{IN} = 70 MHz	70.1			70.3			
		f _{IN} = 100 MHz	69.9			70.2			
		f _{IN} = 170 MHz	69.5			69.5			
		f _{IN} = 230 MHz	68.7			69			
NSD ⁽¹⁾	Noise spectral density (averaged across Nyquist zone)	f _{IN} = 10 MHz	−144.9			−145.1			dBFS/Hz
		f _{IN} = 20 MHz	−144.9	−142.5		−145.1			
		f _{IN} = 70 MHz	−144.7			−144.9			
		f _{IN} = 100 MHz	−144.5			−144.7			
		f _{IN} = 170 MHz	−144.0			−144.1			
		f _{IN} = 230 MHz	−143.3			−143.6			
SINAD ⁽¹⁾	Signal-to-noise and distortion ratio	f _{IN} = 10 MHz	70.8			71			dBFS
		f _{IN} = 20 MHz	68	70.8		71			
		f _{IN} = 70 MHz	70.6			70.8			
		f _{IN} = 100 MHz	70.4			70.6			
		f _{IN} = 170 MHz	69.8			69.9			
		f _{IN} = 230 MHz	69			69.1			
ENOB ⁽¹⁾	Effective number of bits	f _{IN} = 10 MHz	11.5			11.5			Bits
		f _{IN} = 20 MHz	11	11.5		11.5			
		f _{IN} = 70 MHz	11.4			11.5			
		f _{IN} = 100 MHz	11.4			11.4			
		f _{IN} = 170 MHz	11.3			11.3			
		f _{IN} = 230 MHz	11.2			11.2			
SFDR	Spurious-free dynamic range	f _{IN} = 10 MHz	89			95			dBc
		f _{IN} = 20 MHz	82	95		91			
		f _{IN} = 70 MHz	95			93			
		f _{IN} = 100 MHz	88			86			
		f _{IN} = 170 MHz	85			83			
		f _{IN} = 230 MHz	82			81			

(1) Reported from a 1-MHz offset.

AC Performance: ADC3222 (continued)

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, $\text{AVDD} = \text{DVDD} = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3222 (f _S = 50 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
HD2	Second-order harmonic distortion	f _{IN} = 10 MHz	103			97			dBc
		f _{IN} = 20 MHz	82	100		94			
		f _{IN} = 70 MHz	97			94			
		f _{IN} = 100 MHz	94			93			
		f _{IN} = 170 MHz	89			89			
		f _{IN} = 230 MHz	83			83			
HD3	Third-order harmonic distortion	f _{IN} = 10 MHz	89			96			dBc
		f _{IN} = 20 MHz	82	94		95			
		f _{IN} = 70 MHz	95			93			
		f _{IN} = 100 MHz	88			86			
		f _{IN} = 170 MHz	85			83			
		f _{IN} = 230 MHz	83			81			
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f _{IN} = 10 MHz	99			95			dBc
		f _{IN} = 20 MHz	87	101		93			
		f _{IN} = 70 MHz	99			94			
		f _{IN} = 100 MHz	100			94			
		f _{IN} = 170 MHz	99			93			
		f _{IN} = 230 MHz	97			93			
THD	Total harmonic distortion	f _{IN} = 10 MHz	89			89			dBc
		f _{IN} = 20 MHz	80	93		87			
		f _{IN} = 70 MHz	92			88			
		f _{IN} = 100 MHz	90			86			
		f _{IN} = 170 MHz	83			81			
		f _{IN} = 230 MHz	80			78			
IMD3	Two-tone, third-order intermodulation distortion	f _{IN1} = 45 MHz, f _{IN2} = 50 MHz	−95			−92			dBFS
		f _{IN1} = 185 MHz, f _{IN2} = 190 MHz	−92			−92			

7.10 AC Performance: ADC3223

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $\text{AVDD} = \text{DVDD} = 1.8\text{ V}$, and -1 dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3223 (f _s = 80 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio (from 1-MHz offset)	f _{IN} = 10 MHz	70.7			70.9			dBFS
		f _{IN} = 70 MHz	68.5	70.6	70.8				
		f _{IN} = 100 MHz	70.5			70.7			
		f _{IN} = 170 MHz	70.1			70.3			
		f _{IN} = 230 MHz	69.7			69.9			
	Signal-to-noise ratio (full Nyquist band)	f _{IN} = 10 MHz	70.3			70.5			
		f _{IN} = 70 MHz	70.2			70.5			
		f _{IN} = 100 MHz	70.1			70.4			
		f _{IN} = 170 MHz	69.7			69.9			
		f _{IN} = 230 MHz	69.4			69.6			
NSD ⁽¹⁾	Noise spectral density (averaged across Nyquist zone)	f _{IN} = 10 MHz	−146.7			−146.9			dBFS/Hz
		f _{IN} = 70 MHz	−146.6	−144.5	−146.8				
		f _{IN} = 100 MHz	−146.5			−146.7			
		f _{IN} = 170 MHz	−146.1			−146.3			
		f _{IN} = 230 MHz	−145.7			−145.9			
SINAD ⁽¹⁾	Signal-to-noise and distortion ratio	f _{IN} = 10 MHz	70.7			70.9			dBFS
		f _{IN} = 70 MHz	68.1	70.6	70.8				
		f _{IN} = 100 MHz	70.5			70.6			
		f _{IN} = 170 MHz	70			70.2			
		f _{IN} = 230 MHz	69.5			69.6			
ENOB ⁽¹⁾	Effective number of bits	f _{IN} = 10 MHz	11.4			11.5			Bits
		f _{IN} = 70 MHz	11.02	11.4	11.5				
		f _{IN} = 100 MHz	11.4			11.4			
		f _{IN} = 170 MHz	11.3			11.4			
		f _{IN} = 230 MHz	11.3			11.3			
SFDR	Spurious-free dynamic range	f _{IN} = 10 MHz	88			95			dBc
		f _{IN} = 70 MHz	82	94	93				
		f _{IN} = 100 MHz	93			92			
		f _{IN} = 170 MHz	88			87			
		f _{IN} = 230 MHz	85			84			

(1) Reported from a 1-MHz offset.

AC Performance: ADC3223 (continued)

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $\text{AVDD} = \text{DVDD} = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3223 (f _S = 80 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
HD2	Second-order harmonic distortion	f _{IN} = 10 MHz	104			99			dBc
		f _{IN} = 70 MHz	82	95	94				
		f _{IN} = 100 MHz	95			93			
		f _{IN} = 170 MHz	88			87			
		f _{IN} = 230 MHz	85			85			
HD3	Third-order harmonic distortion	f _{IN} = 10 MHz	89			95			dBc
		f _{IN} = 70 MHz	82	94	94				
		f _{IN} = 100 MHz	95			96			
		f _{IN} = 170 MHz	93			90			
		f _{IN} = 230 MHz	89			85			
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f _{IN} = 10 MHz	94			93			dBc
		f _{IN} = 70 MHz	87	100	95				
		f _{IN} = 100 MHz	99			96			
		f _{IN} = 170 MHz	99			95			
		f _{IN} = 230 MHz	98			95			
THD	Total harmonic distortion	f _{IN} = 10 MHz	88			91			dBc
		f _{IN} = 70 MHz	79.5	91	89				
		f _{IN} = 100 MHz	91			88			
		f _{IN} = 170 MHz	86			84			
		f _{IN} = 230 MHz	83			81			
IMD3	Two-tone, third-order intermodulation distortion	f _{IN1} = 45 MHz, f _{IN2} = 50 MHz	−94			−94			dBFS
		f _{IN1} = 185 MHz, f _{IN2} = 190 MHz	−92			−90			

7.11 AC Performance: ADC3224

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $\text{AVDD} = \text{DVDD} = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3224 (f _S = 125 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
DYNAMIC AC CHARACTERISTICS									
SNR	Signal-to-noise ratio (from 1-MHz offset)	f _{IN} = 10 MHz	70.5			70.8			dBFS
		f _{IN} = 70 MHz	68.5	70.4	70.7				
		f _{IN} = 100 MHz	70.3			70.6			
		f _{IN} = 170 MHz	69.9			70.2			
		f _{IN} = 230 MHz	69.4			69.8			
	Signal-to-noise ratio (full Nyquist band)	f _{IN} = 10 MHz	70.3			70.6			
		f _{IN} = 70 MHz	70.2			70.5			
		f _{IN} = 100 MHz	70.2			70.4			
		f _{IN} = 170 MHz	69.7			70.0			
		f _{IN} = 230 MHz	69.2			69.6			
NSD ⁽¹⁾	Noise spectral density (averaged across Nyquist zone)	f _{IN} = 10 MHz	−148.5			−148.8			dBFS/Hz
		f _{IN} = 70 MHz	−148.4	−146.5	−148.7				
		f _{IN} = 100 MHz	−148.3			−148.6			
		f _{IN} = 170 MHz	−147.9			−148.2			
		f _{IN} = 230 MHz	−147.4			−147.8			
SINAD ⁽¹⁾	Signal-to-noise and distortion ratio	f _{IN} = 10 MHz	70.5			70.6			dBFS
		f _{IN} = 70 MHz	68	70.4	70.6				
		f _{IN} = 100 MHz	70.2			70.3			
		f _{IN} = 170 MHz	69.7			69.9			
		f _{IN} = 230 MHz	69.2			69.5			
ENOB ⁽¹⁾	Effective number of bits	f _{IN} = 10 MHz	11.4			11.4			Bits
		f _{IN} = 70 MHz	11	11.4	11.4				
		f _{IN} = 100 MHz	11.4			11.4			
		f _{IN} = 170 MHz	11.3			11.3			
		f _{IN} = 230 MHz	11.2			11.2			
SFDR	Spurious-free dynamic range	f _{IN} = 10 MHz	93			87			dBc
		f _{IN} = 70 MHz	82	95	89				
		f _{IN} = 100 MHz	89			86			
		f _{IN} = 170 MHz	86			85			
		f _{IN} = 230 MHz	83			83			

(1) Reported from a 1-MHz offset.

AC Performance: ADC3224 (continued)

typical values are over the operating free-air temperature range, at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = DVDD = 1.8\text{ V}$, and -1-dBFS differential input (unless otherwise noted)

PARAMETER		TEST CONDITIONS	ADC3224 (f _S = 125 MSPS)						UNIT
			DITHER ON			DITHER OFF			
			MIN	TYP	MAX	MIN	TYP	MAX	
HD2	Second-order harmonic distortion	f _{IN} = 10 MHz		96			96		dBc
		f _{IN} = 70 MHz	84	96			96		
		f _{IN} = 100 MHz		91			91		
		f _{IN} = 170 MHz		86			85		
		f _{IN} = 230 MHz		83			83		
HD3	Third-order harmonic distortion	f _{IN} = 10 MHz		94			87		dBc
		f _{IN} = 70 MHz	82	95			89		
		f _{IN} = 100 MHz		91			86		
		f _{IN} = 170 MHz		96			89		
		f _{IN} = 230 MHz		88			85		
Non HD2, HD3	Spurious-free dynamic range (excluding HD2, HD3)	f _{IN} = 10 MHz		99			96		dBc
		f _{IN} = 70 MHz	87	99			95		
		f _{IN} = 100 MHz		99			95		
		f _{IN} = 170 MHz		99			92		
		f _{IN} = 230 MHz		97			92		
THD	Total harmonic distortion	f _{IN} = 10 MHz		91			85		dBc
		f _{IN} = 70 MHz	80	91			86		
		f _{IN} = 100 MHz		87			83		
		f _{IN} = 170 MHz		85			82		
		f _{IN} = 230 MHz		82			80		
IMD3	Two-tone, third-order intermodulation distortion	f _{IN1} = 45 MHz, f _{IN2} = 50 MHz		−96			−95		dBFS
		f _{IN1} = 185 MHz, f _{IN2} = 190 MHz		−92			−88		

7.12 Digital Characteristics

the dc specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1; AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUTS (RESET, SCLK, SDATA, SEN, PDN)							
V _{IH}	High-level input voltage		All digital inputs support 1.8-V and 3.3-V CMOS logic levels	1.3			V
V _{IL}	Low-level input voltage		All digital inputs support 1.8-V and 3.3-V CMOS logic levels	0.4			V
I _{IH}	High-level input current	RESET, SDATA, SCLK, PDN	V _{HIGH} = 1.8 V	10			μA
		SEN ⁽¹⁾	V _{HIGH} = 1.8 V	0			
I _{IL}	Low-level input current	RESET, SDATA, SCLK, PDN	V _{LOW} = 0 V	0			μA
		SEN	V _{LOW} = 0 V	10			
DIGITAL INPUTS (SYSREFP, SYSREFM)							
V _{IH}	High-level input voltage			1.3			V
V _{IL}	Low-level input voltage			0.5			V
	Common-mode voltage for SYSREF			0.9			V
DIGITAL OUTPUTS, CMOS INTERFACE (SDOUT)							
V _{OH}	High-level output voltage			DVDD – 0.1	DVDD		V
V _{OL}	Low-level output voltage				0	0.1	V
DIGITAL OUTPUTS, LVDS INTERFACE							
V _{ODH}	High-level output differential voltage		With an external 100-Ω termination	280	350	460	mV
V _{ODL}	Low-level output differential voltage		With an external 100-Ω termination	–460	–350	–280	mV
V _{OCM}	Output common-mode voltage			1.05			V

(1) SEN has an internal 150-kΩ pull-up resistor to AVDD. SPI pins (SEN, SCLK, SDATA) can be driven by 1.8-V or 3.3-V CMOS buffers.

7.13 Timing Requirements: General

typical values are at T_A = 25°C, AVDD = DVDD = 1.8 V, and –1-dBFS differential input (unless otherwise noted); minimum and maximum values are across the full temperature range: T_{MIN} = –40°C to T_{MAX} = 85°C

			MIN	TYP	MAX	UNIT
t _A	Aperture delay		1.24	1.44	1.64	ns
	Aperture delay matching between two channels of the same device			±70		ps
	Aperture delay variation between two devices at same temperature and supply voltage			±150		ps
t _J	Aperture jitter			130		f _s rms
Wake-up time	Time to valid data after exiting standby power-down mode			35	65	μs
	Time to valid data after exiting global power-down mode (in this mode, both channels power down)			85	140	
ADC latency ⁽¹⁾	2-wire mode (default)			9		Clock cycles
	1-wire mode			8		
t _{SU_SYSREF}	SYSREF reference time	Setup time for SYSREF referenced to input clock rising edge	1000			ps
t _{H_SYSREF}		Hold time for SYSREF referenced to input clock rising edge	100			

(1) Overall latency = ADC latency + t_{PDI}.

7.14 Timing Requirements: LVDS Output

typical values are at $T_A = 25^\circ\text{C}$, $AVDD = DVDD = 1.8\text{ V}$, and -1-dBFS differential input, 6x serialization (2-wire mode), $C_{\text{LOAD}} = 3.3\text{ pF}^{(1)}$, and $R_{\text{LOAD}} = 100\ \Omega^{(2)}$ (unless otherwise noted); minimum and maximum values are across the full temperature range: $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}^{(3)(4)}$

		MIN	TYP	MAX	UNIT
t_{SU}	Data setup time: data valid to zero-crossing of differential output clock (CLKOUTP – CLKOUTM) ⁽⁵⁾	0.43	0.5		ns
t_{HO}	Data hold time: zero-crossing of differential output clock (CLKOUTP – CLKOUTM) to data becoming invalid ⁽⁵⁾	0.48	0.58		ns
t_{PDI}	Clock propagation delay: input clock falling edge cross-over to frame clock rising edge cross-over (15 MSPS < sampling frequency < 125 MSPS)	1-wire mode	2.7	4.5	6.5
		2-wire mode	$0.44 \times t_{\text{S}} + t_{\text{DELAY}}$		ns
t_{DELAY}	Delay time	3	4.5	5.9	ns
	LVDS bit clock duty cycle: duty cycle of differential clock (CLKOUTP – CLKOUTM)		49%		
$t_{\text{FALL}}, t_{\text{RISE}}$	Data fall time, data rise time: rise time measured from -100 mV to 100 mV , $15\text{ MSPS} \leq \text{Sampling frequency} \leq 125\text{ MSPS}$		0.11		ns
$t_{\text{CLKRISE}}, t_{\text{CLKFALL}}$	Output clock rise time, output clock fall time: rise time measured from -100 mV to 100 mV , $10\text{ MSPS} \leq \text{Sampling frequency} \leq 125\text{ MSPS}$		0.11		ns

- (1) C_{LOAD} is the effective external single-ended load capacitance between each output pin and ground.
- (2) R_{LOAD} is the differential load resistance between the LVDS output pair.
- (3) Measurements are done with a transmission line of a $100\text{-}\Omega$ characteristic impedance between the device and load. Setup and hold time specifications take into account the effect of jitter on the output data and clock.
- (4) Timing parameters are ensured by design and characterization and are not tested in production.
- (5) Data valid refers to a logic high of 100 mV and a logic low of -100 mV .

Table 1. LVDS Timing at Lower Sampling Frequencies: 6X Serialization (2-Wire Mode)


SAMPLING FREQUENCY (MSPS)	SETUP TIME (t_{SU} , ns)			HOLD TIME (t_{HO} , ns)		
	MIN	TYP	MAX	MIN	TYP	MAX
25	2.61	3.06		2.75	3.12	
40	1.69	1.9		1.8	1.98	
60	1.11	1.23		1.18	1.31	
80	0.81	0.89		0.88	0.97	
100	0.6	0.68		0.68	0.77	

Table 2. LVDS Timings at Lower Sampling Frequencies: 12X Serialization (1-Wire Mode)

SAMPLING FREQUENCY (MSPS)	SETUP TIME (t_{SU} , ns)			HOLD TIME (t_{HO} , ns)		
	MIN	TYP	MAX	MIN	TYP	MAX
25	1.3	1.48		1.32	1.57	
40	0.76	0.88		0.79	0.97	
50	0.57	0.68		0.61	0.77	
60	0.42	0.55		0.45	0.62	
70	0.35	0.44		0.4	0.51	
80	0.26	0.35		0.35	0.43	


7.15 Typical Characteristics: ADC3221

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1-dBFS differential input, $2-V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

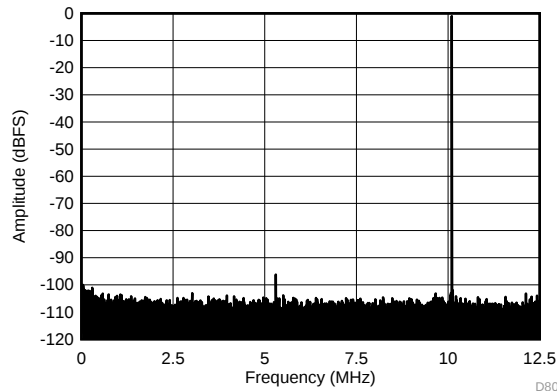


SFDR = 95.2 dBc, SNR = 71.2 dBFS, SINAD = 71.2 dBFS,
THD = 94.1 dBc, HD2 = 106.0 dBc, HD3 = 95.2 dBc

Figure 1. FFT for 10-MHz Input Signal (Dither On)

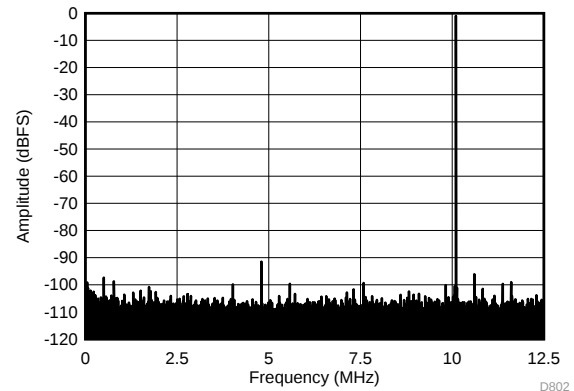


SFDR = 90.4 dBc, SNR = 71.6 dBFS, SINAD = 71.5 dBFS,
THD = 88.6 dBc, HD2 = 90.4 dBc, HD3 = 105.5 dBc

Figure 2. FFT for 10-MHz Input Signal (Dither Off)

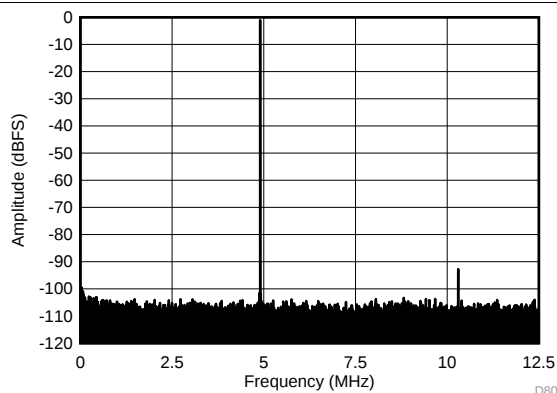


SFDR = 91.6 dBc, SNR = 71.1 dBFS, SINAD = 71.1 dBFS,
THD = 91 dBc, HD2 = 105.3 dBc, HD3 = 91.6 dBc

Figure 3. FFT for 70-MHz Input Signal (Dither On)

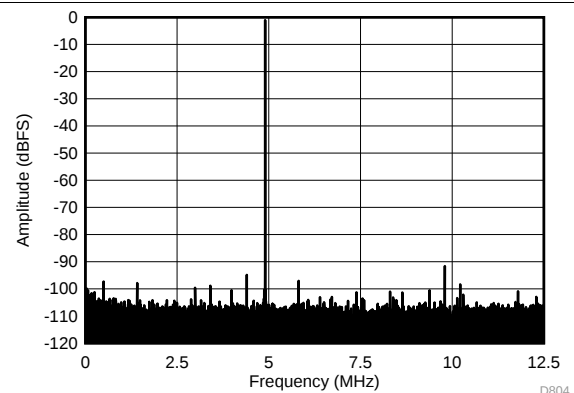


SFDR = 90.6 dBc, SNR = 71.4 dBFS, SINAD = 71.3 dBFS,
THD = 88.4 dBc, HD2 = 90.6 dBc, HD3 = 101.1 dBc

Figure 4. FFT for 70-MHz Input Signal (Dither Off)

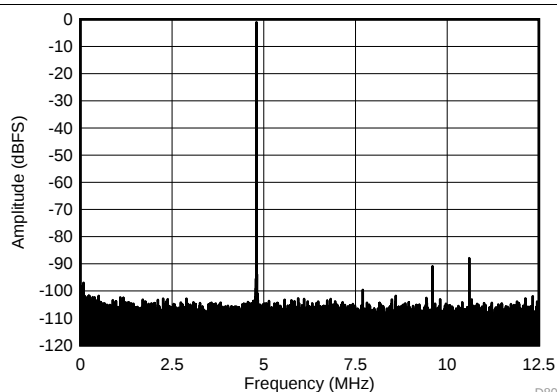

SFDR = 86.8 dBc, SNR = 70.2 dBFS, SINAD = 70.1 dBFS,
THD = 84.8 dBc, HD2 = 89.9 dBc, HD3 = 86.8 dBc

Figure 5. FFT for 170-MHz Input Signal (Dither On)

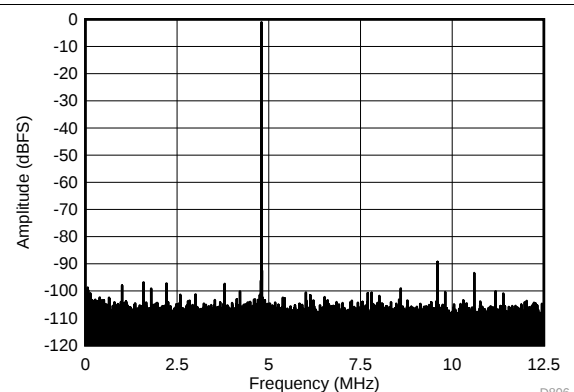


SFDR = 88.2 dBc, SNR = 70.5 dBFS, SINAD = 70.4 dBFS,
THD = 85.7 dBc, HD2 = 88.2 dBc, HD3 = 92.3 dBc

Figure 6. FFT for 170-MHz Input Signal (Dither Off)


Typical Characteristics: ADC3221 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, $AV_{DD} = 1.8\text{ V}$, $DV_{DD} = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

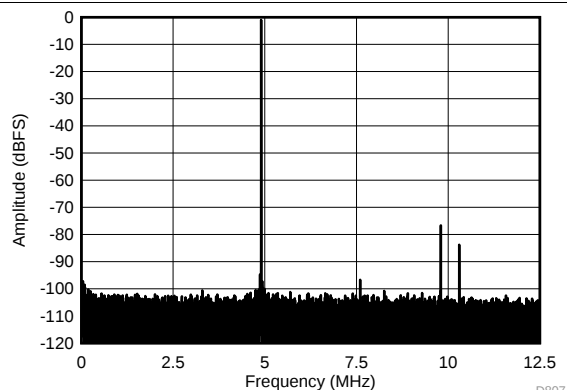


SFDR = 75.7 dBc, SNR = 68.6 dBFS, SINAD = 67.8 dBFS,
THD = 74.9 dBc, HD2 = 75.7 dBc, HD3 = 82.8 dBc

Figure 7. FFT for 270-MHz Input Signal (Dither On)

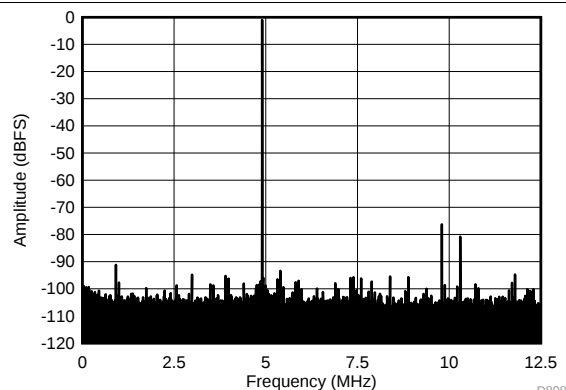


SFDR = 75.3 dBc, SNR = 68.7 dBFS, SINAD = 67.7 dBFS,
THD = 73.8 dBc, HD2 = 75.3 dBc, HD3 = 79.8 dBc

Figure 8. FFT for 270-MHz Input Signal (Dither Off)

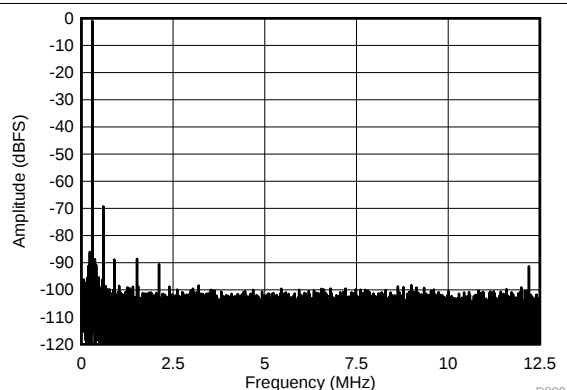


SFDR = 68.2 dBc, SNR = 66.6 dBFS, SINAD = 66.6 dBFS,
THD = 92.7 dBc, HD2 = 68.2 dBc, HD3 = 87.8 dBc

Figure 9. FFT for 450-MHz Input Signal (Dither On)

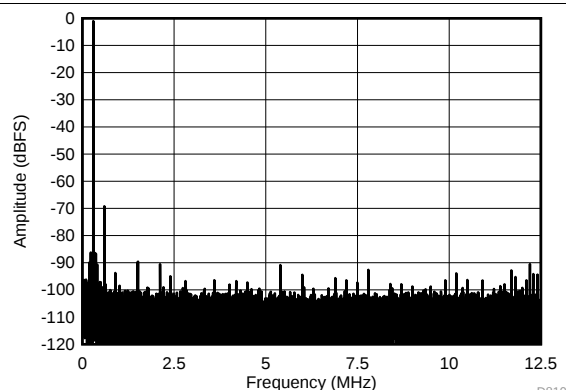


SFDR = 68.2 dBc, SNR = 66.5 dBFS, SINAD = 66.5 dBFS,
THD = 87.1 dBc, HD2 = 68.2 dBc, HD3 = 92.7 dBc

Figure 10. FFT for 450-MHz Input Signal (Dither Off)

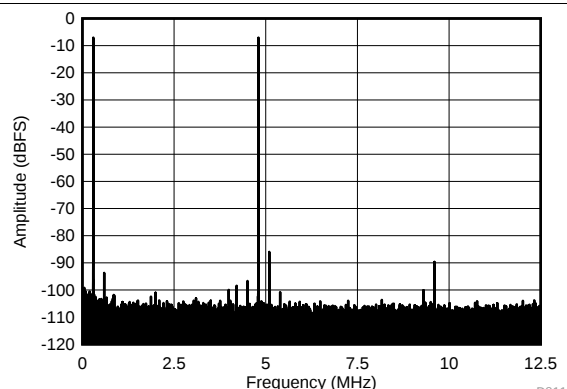

$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 84 dBFS,
each tone at -7 dBFS

**Figure 11. FFT for Two-Tone Input Signal
(-7 dBFS at 46 MHz and 50 MHz)**

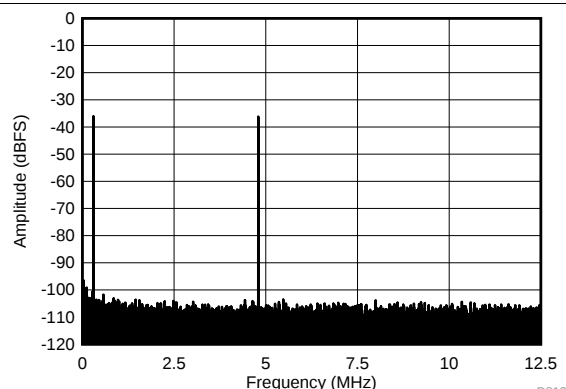

$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 105 dBFS,
each tone at -36 dBFS

**Figure 12. FFT for Two-Tone Input Signal
(-36 dBFS at 46 MHz and 50 MHz)**

Typical Characteristics: ADC3221 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

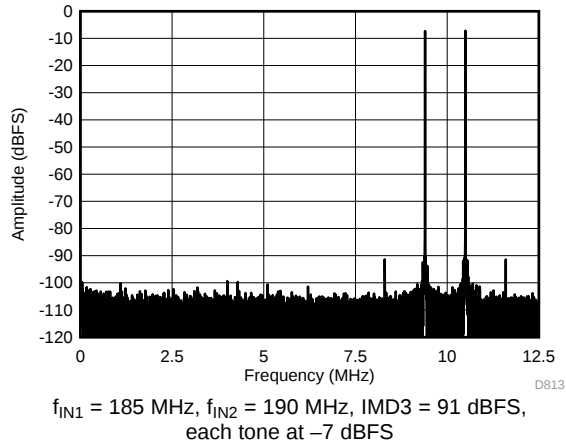


Figure 13. FFT for Two-Tone Input Signal (-7 dBFS at 185 MHz and 190 MHz)

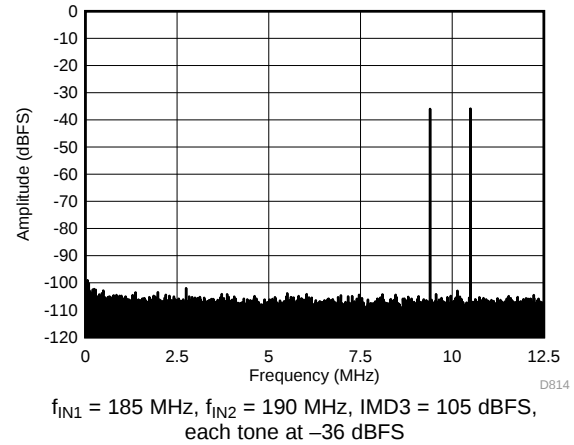


Figure 14. FFT for Two-Tone Input Signal (-36 dBFS at 185 MHz and 190 MHz)

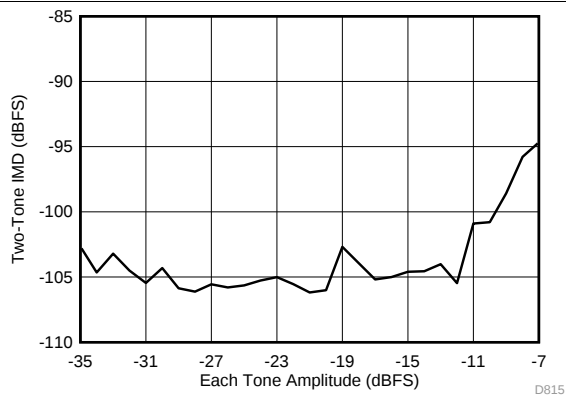


Figure 15. Intermodulation Distortion vs Input Amplitude (46 MHz and 50 MHz)

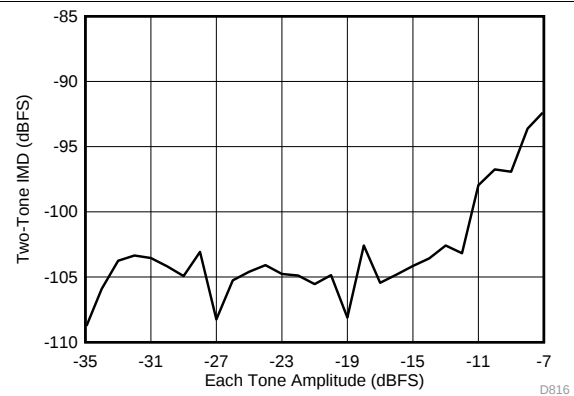


Figure 16. Intermodulation Distortion vs Input Amplitude (185 MHz and 190 MHz)

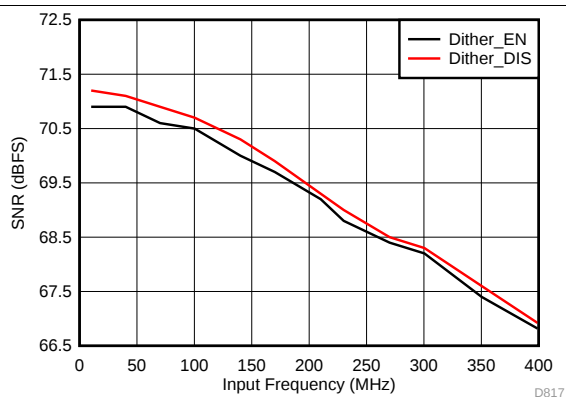


Figure 17. Signal-to-Noise Ratio vs Input Frequency

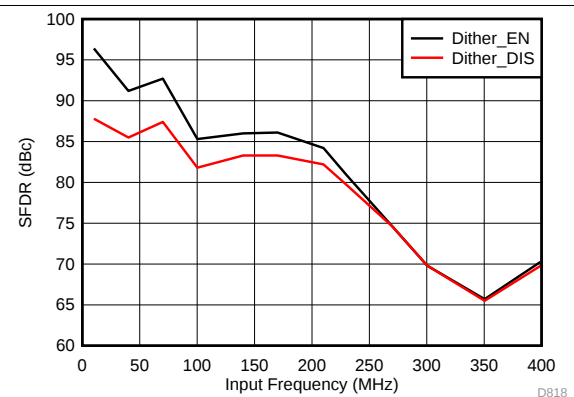


Figure 18. Spurious-Free Dynamic Range vs Input Frequency

Typical Characteristics: ADC3221 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

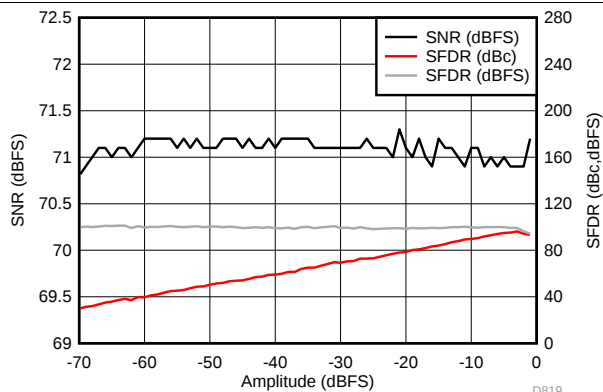


Figure 19. Performance vs Input Amplitude (30 MHz)

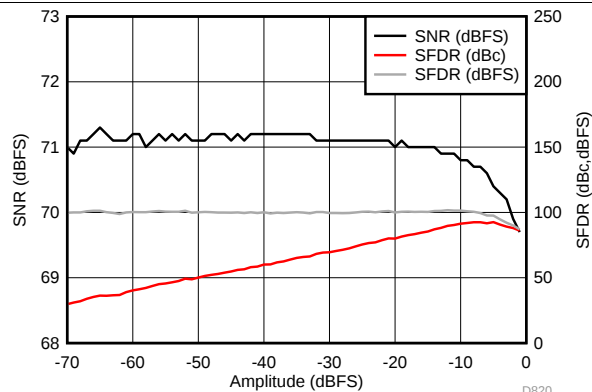


Figure 20. Performance vs Input Amplitude (170 MHz)

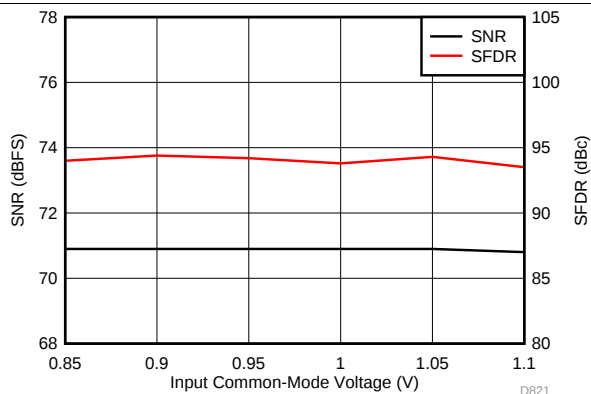


Figure 21. Performance vs Input Common-Mode Voltage (30 MHz)

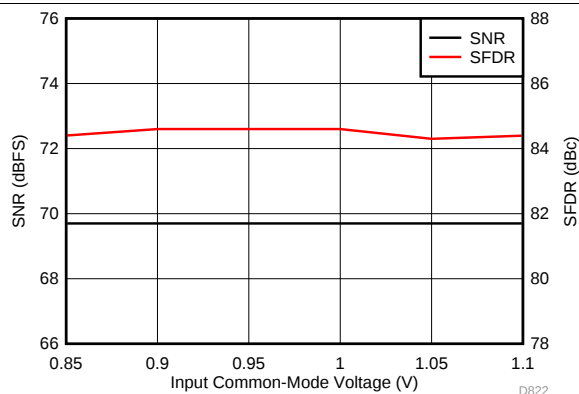


Figure 22. Performance vs Input Common-Mode Voltage (170 MHz)

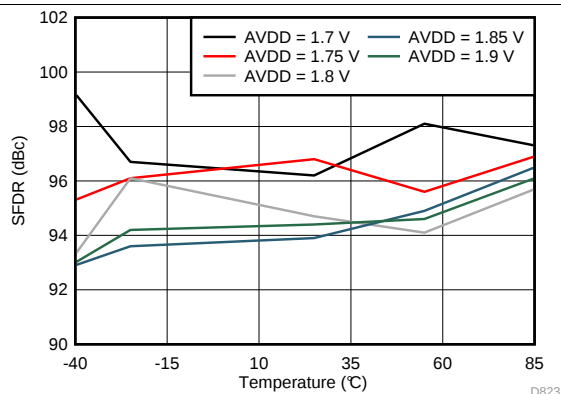


Figure 23. Spurious-Free Dynamic Range vs AVDD Supply and Temperature (30 MHz)

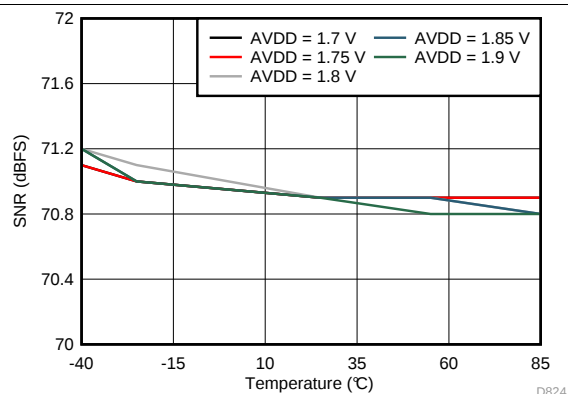


Figure 24. Signal-to-Noise Ratio vs AVDD Supply and Temperature (30 MHz)

Typical Characteristics: ADC3221 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 25 MSPS, 50% clock duty cycle, AVDD = 1.8 V, DVDD = 1.8 V, –1-dBFS differential input, 2- V_{PP} full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

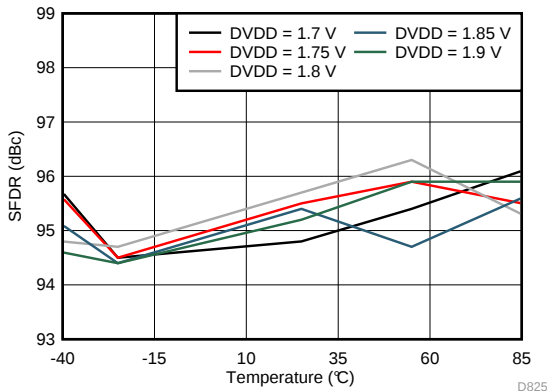


Figure 25. Spurious-Free Dynamic Range vs DVDD Supply and Temperature (30 MHz)

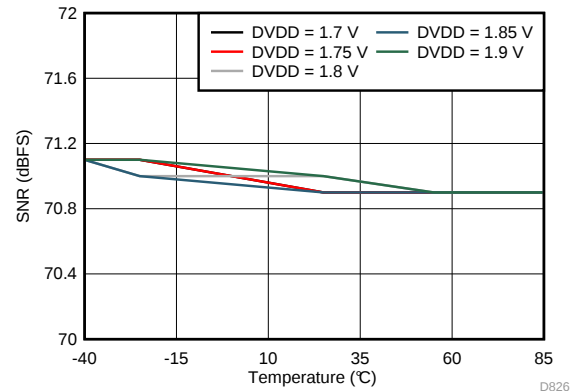


Figure 26. Signal-to-Noise Ratio vs DVDD Supply and Temperature (30 MHz)

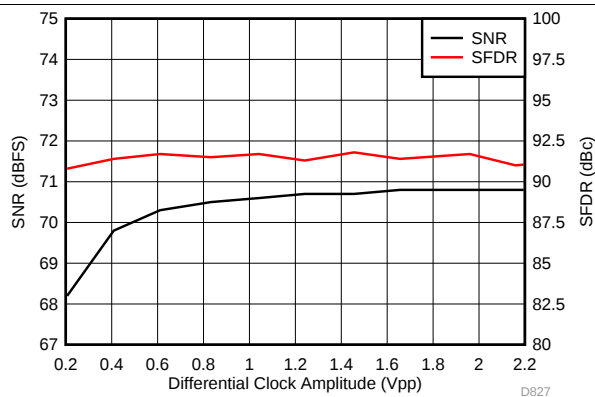


Figure 27. Performance vs Differential Clock Amplitude (40 MHz)

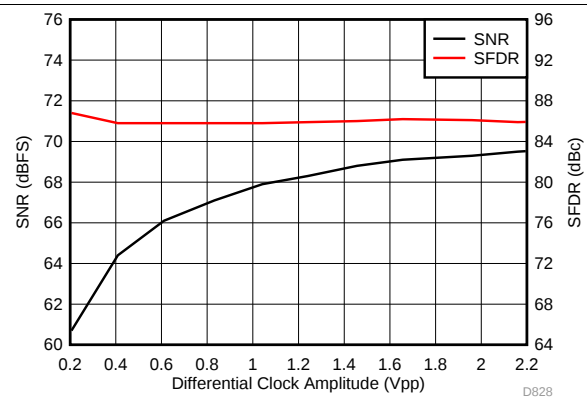


Figure 28. Performance vs Differential Clock Amplitude (150 MHz)

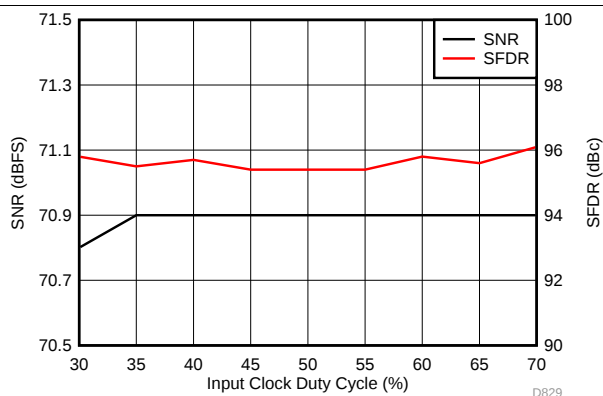


Figure 29. Performance vs Clock Duty Cycle (30 MHz)


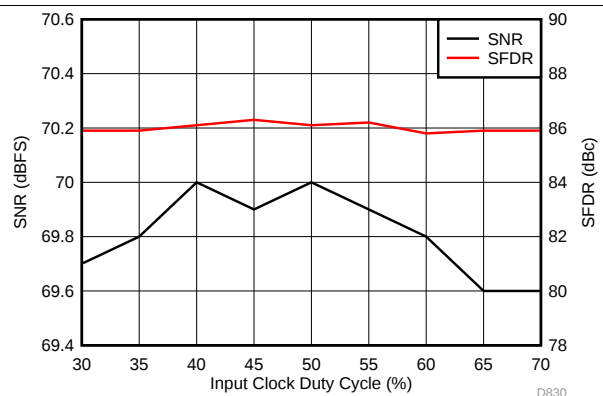


Figure 30. Performance vs Clock Duty Cycle (150 MHz)


7.16 Typical Characteristics: ADC3222

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2-V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

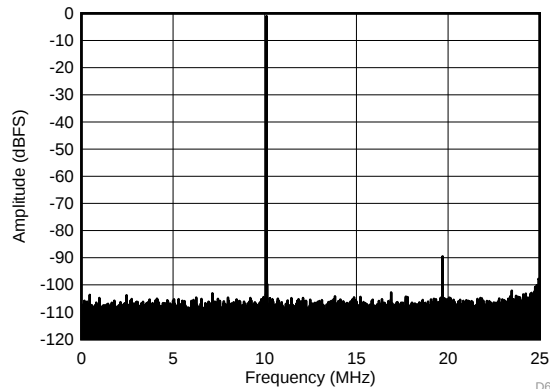


SFDR = 88.5 dBc, SFDR = 99.8 dBc (non 23), SNR = 71.1 dBFS, SINAD = 71 dBFS, THD = 88.1 dBc, HD2 = 109.9 dBc, HD3 = 88.5 dBc

Figure 31. FFT for 10-MHz Input Signal (Dither On)

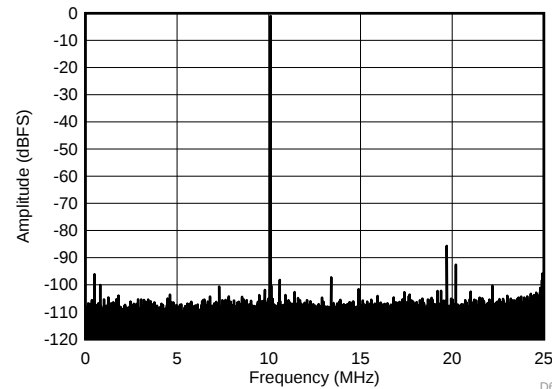


SFDR = 84.6 dBc, SFDR = 96.1 dBc (non 23), SNR = 71.4 dBFS, SINAD = 71.1 dBFS, THD = 83.2 dBc, HD2 = 91.6 dBc, HD3 = 84.6 dBc

Figure 32. FFT for 10-MHz Input Signal (Dither Off)

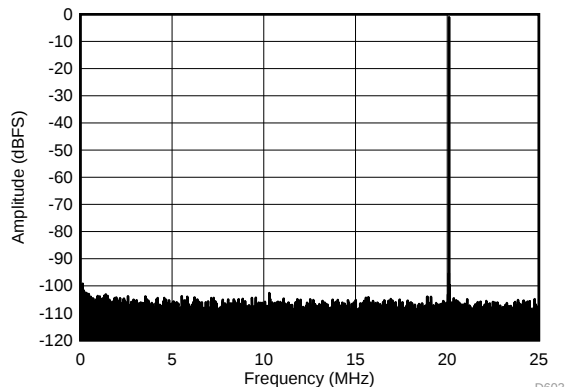


SFDR = 101.6 dBc, SFDR = 100.3 dBc (non 23), SNR = 70.9 dBFS, SINAD = 70.9 dBFS, THD = 98.1 dBc, HD2 = 106.6 dBc, HD3 = 101.6 dBc

Figure 33. FFT for 70-MHz Input Signal (Dither On)

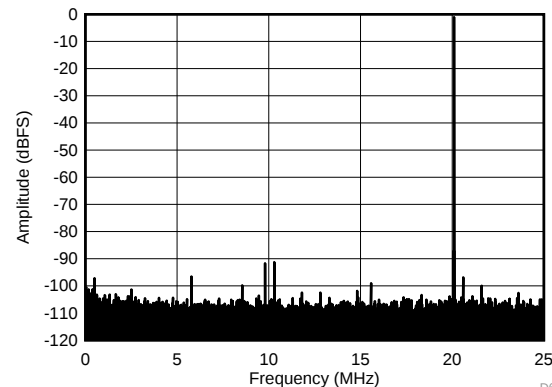


SFDR = 90.2 dBc, SFDR = 94.7 dBc (non 23), SNR = 71.2 dBFS, SINAD = 71.1 dBFS, THD = 86.7 dBc, HD2 = 90.6 dBc, HD3 = 90.2 dBc

Figure 34. FFT for 70-MHz Input Signal (Dither Off)

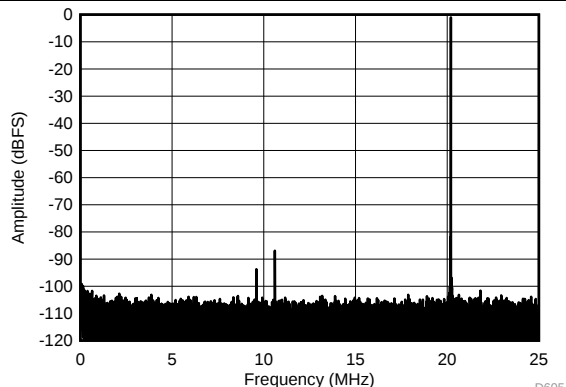

SFDR = 85.9 dBc, SFDR = 99.1 dBc (non 23), SNR = 70.4 dBFS, SINAD = 70.2 dBFS, THD = 84.8 dBc, HD2 = 92.7 dBc, HD3 = 85.9 dBc

Figure 35. FFT for 170-MHz Input Signal (Dither On)

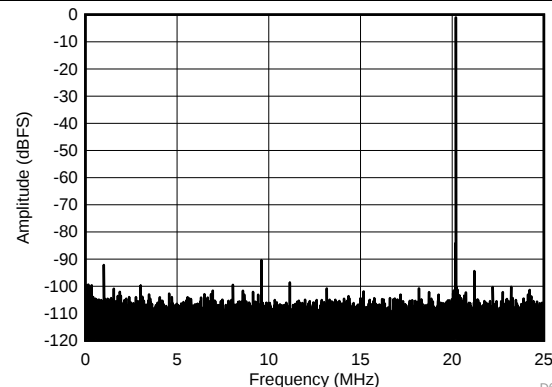


SFDR = 89.3 dBc, SFDR = 93 dBc (non 23), SNR = 70.7 dBFS, SINAD = 70.6 dBFS, THD = 85.8 dBc, HD2 = 89.3 dBc, HD3 = 111.9 dBc

Figure 36. FFT for 170-MHz Input Signal (Dither Off)


Typical Characteristics: ADC3222 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, $AV_{DD} = 1.8\text{ V}$, $DV_{DD} = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

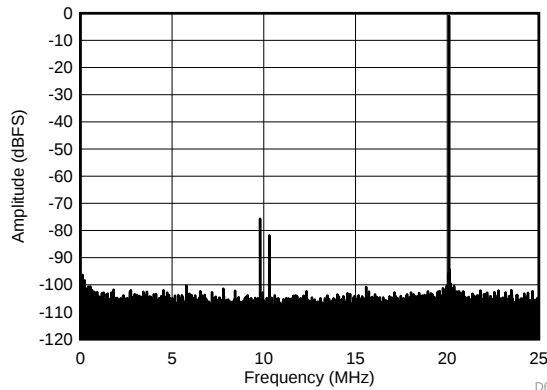


SFDR = 74.7 dBc, SFDR = 95.2 dBc (non 23), SNR = 69.2 dBFS, SINAD = 68.1 dBFS, THD = 73.7 dBc, HD2 = 74.7 dBc, HD3 = 80.9 dBc

Figure 37. FFT for 270-MHz Input Signal (Dither On)

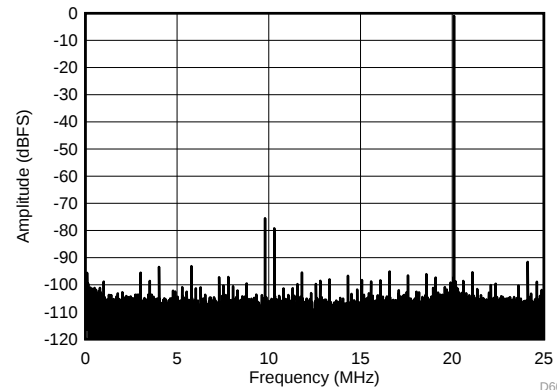


SFDR = 74.5 dBc, SFDR = 91.1 dBc (non 23), SNR = 69.4 dBFS, SINAD = 68.1 dBFS, THD = 72.9 dBc, HD2 = 74.5 dBc, HD3 = 78.2 dBc

Figure 38. FFT for 270-MHz Input Signal (Dither Off)

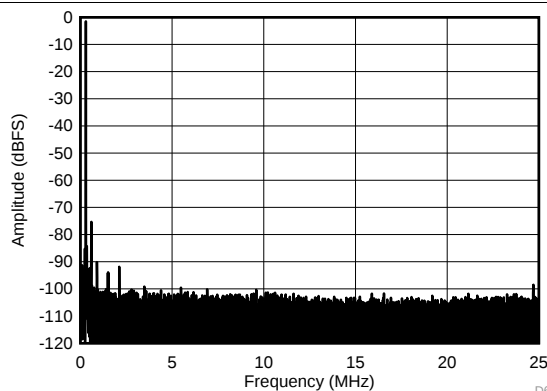


SFDR = 68.2 dBc, SNR = 67.4 dBFS, SINAD = 67.3 dBFS, THD = 86.4 dBc, HD2 = 68.2 dBc, HD3 = 87.3 dBc

Figure 39. FFT for 450-MHz Input Signal (Dither On)

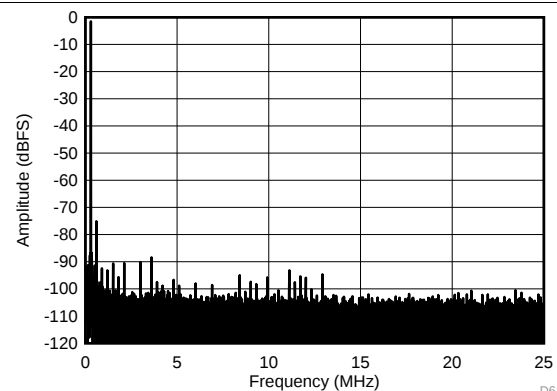


SFDR = 68.1 dBc, SNR = 67.7 dBFS, SINAD = 67.6 dBFS, THD = 86.6 dBc, HD2 = 68.1 dBc, HD3 = 87.3 dBc

Figure 40. FFT for 450-MHz Input Signal (Dither Off)

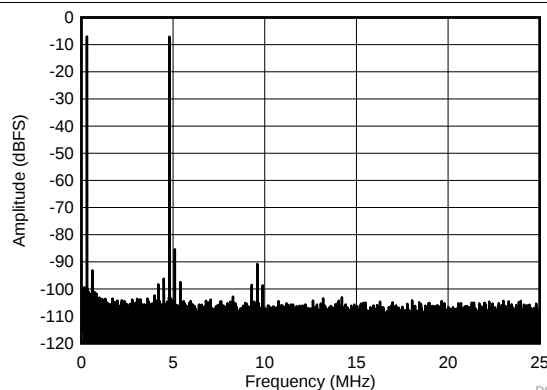

$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 85.4 dBFS, each tone at -7 dBFS

Figure 41. FFT for Two-Tone Input Signal (-7 dBFS at 46 MHz and 50 MHz)

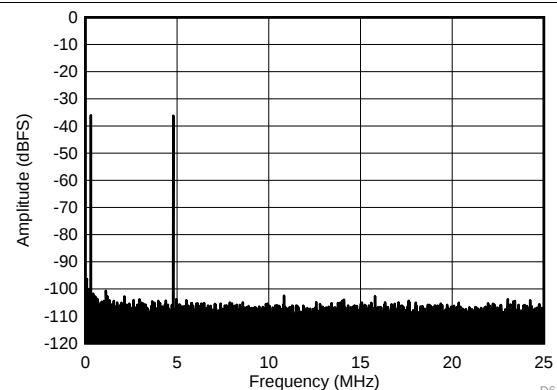


$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 103 dBFS, each tone at -36 dBFS


Figure 42. FFT for Two-Tone Input Signal (-36 dBFS at 46 MHz and 50 MHz)

Typical Characteristics: ADC3222 (continued)


typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, $AV_{DD} = 1.8\text{ V}$, $DV_{DD} = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

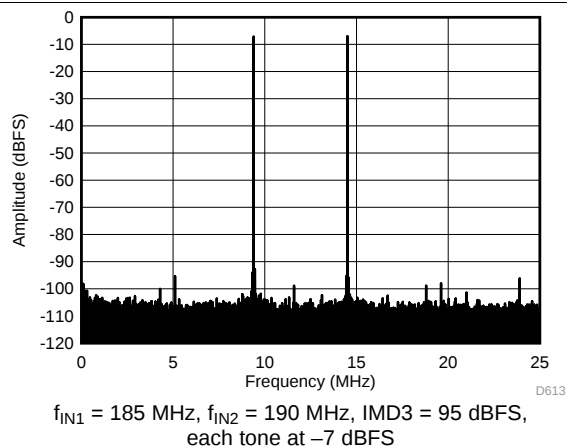


**Figure 43. FFT for Two-Tone Input Signal
(-7 dBFS at 185 MHz and 190 MHz)**

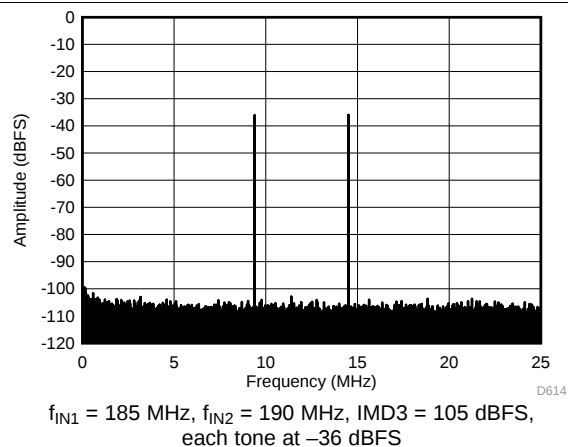

**Figure 44. FFT for Two-Tone Input Signal
(-36 dBFS at 185 MHz and 190 MHz)**

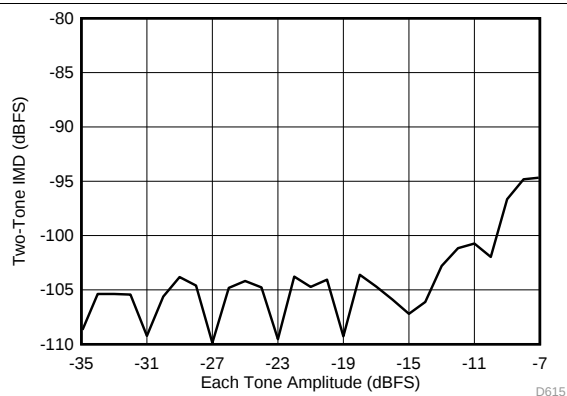

**Figure 45. Intermodulation Distortion vs Input Amplitude
(46 MHz and 50 MHz)**

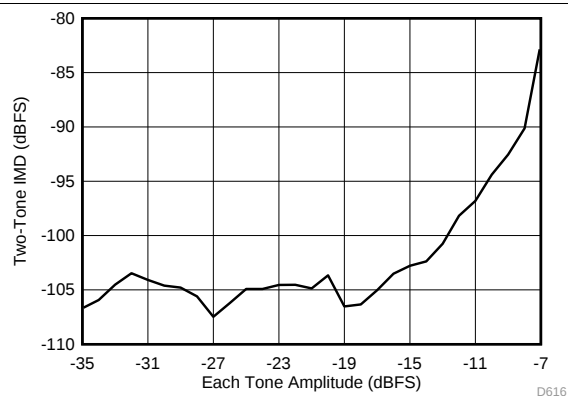

**Figure 46. Intermodulation Distortion vs Input Amplitude
(185 MHz and 190 MHz)**


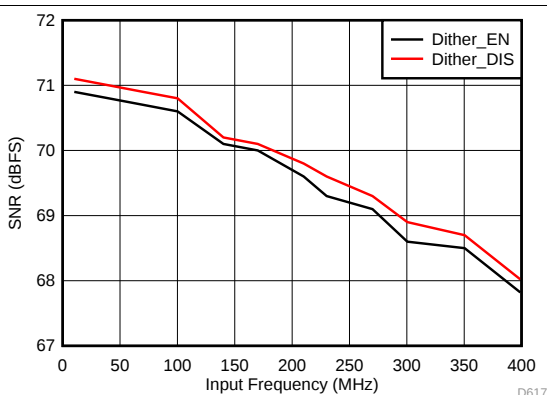


Figure 47. Signal-to-Noise Ratio vs Input Frequency

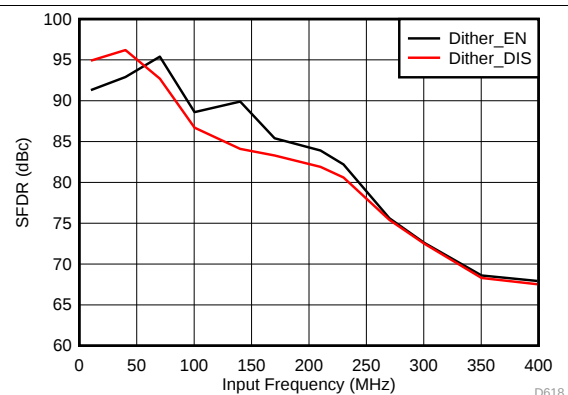

**Figure 48. Spurious-Free Dynamic Range vs
Input Frequency**

Typical Characteristics: ADC3222 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, AVDD = 1.8 V, DVDD = 1.8 V, –1-dBFS differential input, 2- V_{PP} full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

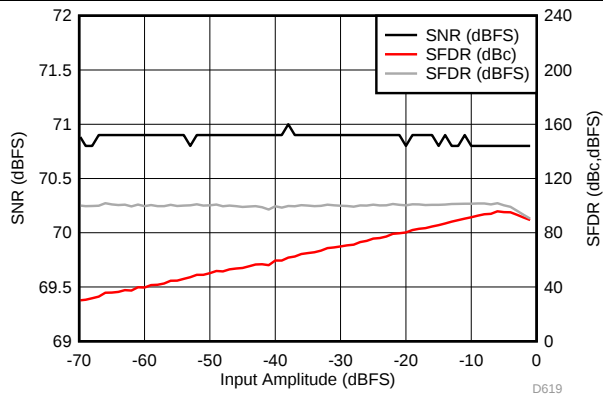


Figure 49. Performance vs Input Amplitude (30 MHz)

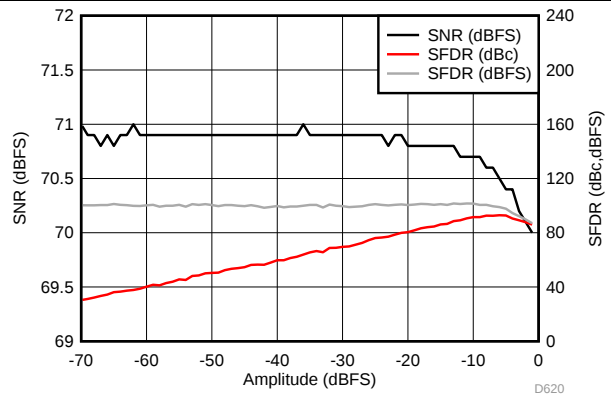


Figure 50. Performance vs Input Amplitude (170 MHz)

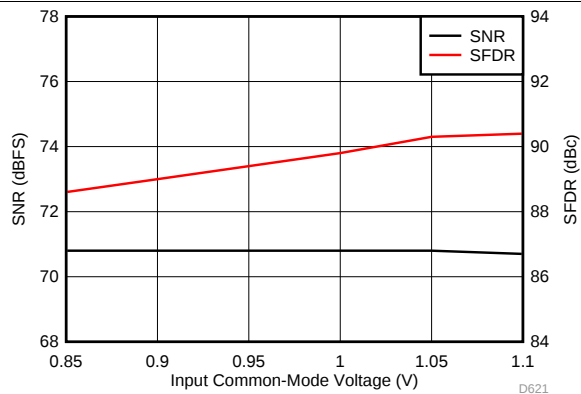


Figure 51. Performance vs Input Common-Mode Voltage (30 MHz)

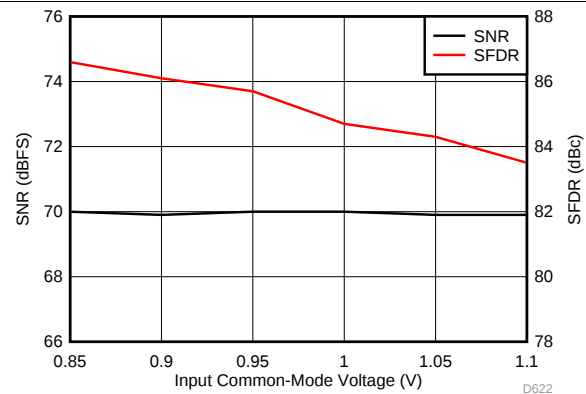


Figure 52. Performance vs Input Common-Mode Voltage (170 MHz)

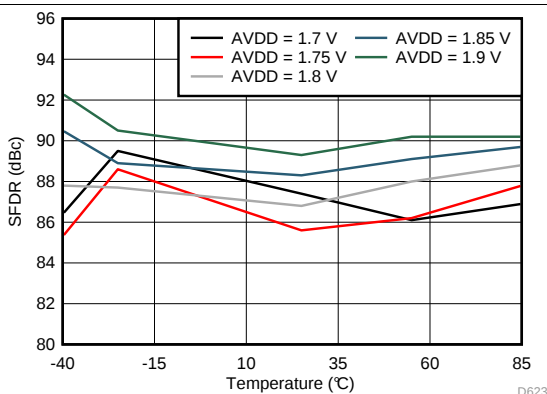


Figure 53. Spurious-Free Dynamic Range vs AVDD Supply and Temperature (30 MHz)

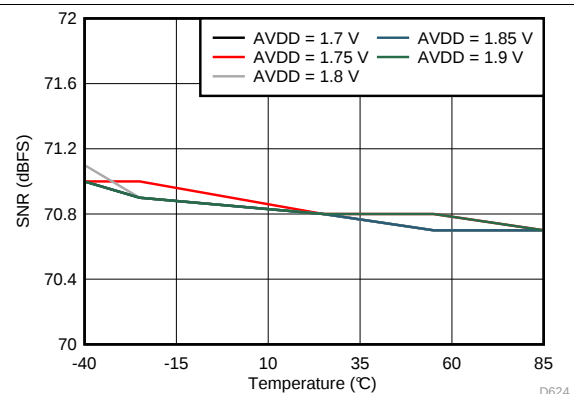


Figure 54. Signal-to-Noise Ratio vs AVDD Supply and Temperature (30 MHz)

Typical Characteristics: ADC3222 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 50 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

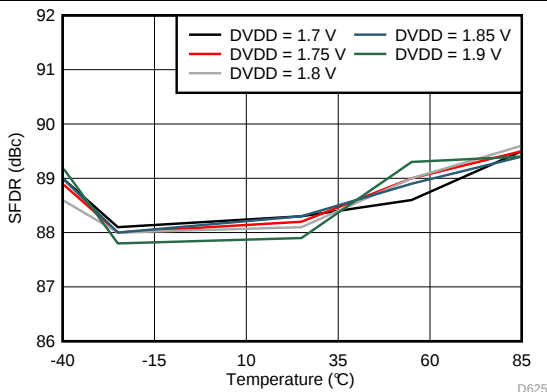


Figure 55. Spurious-Free Dynamic Range vs DVDD Supply and Temperature (30 MHz)

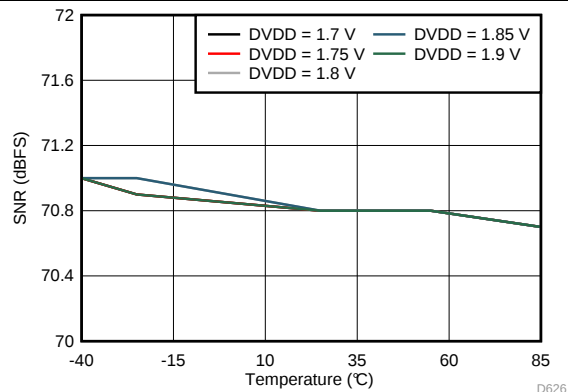


Figure 56. Signal-to-Noise Ratio vs DVDD Supply and Temperature (30 MHz)

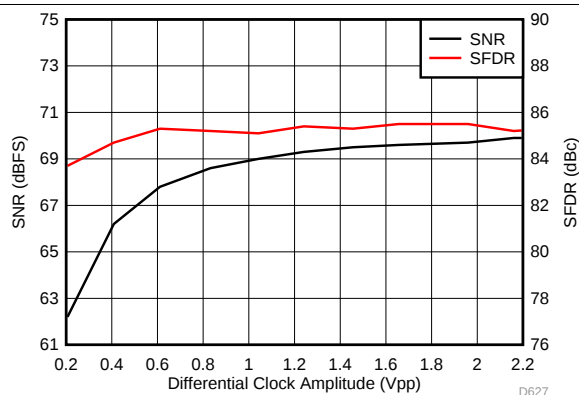


Figure 57. Performance vs Differential Clock Amplitude (40 MHz)

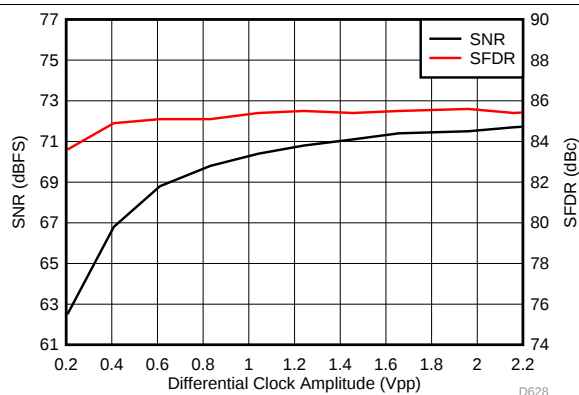


Figure 58. Performance vs Differential Clock Amplitude (150 MHz)

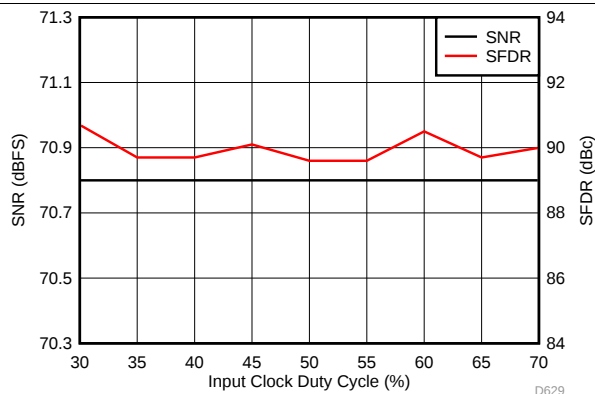


Figure 59. Performance vs Clock Duty Cycle (30 MHz)


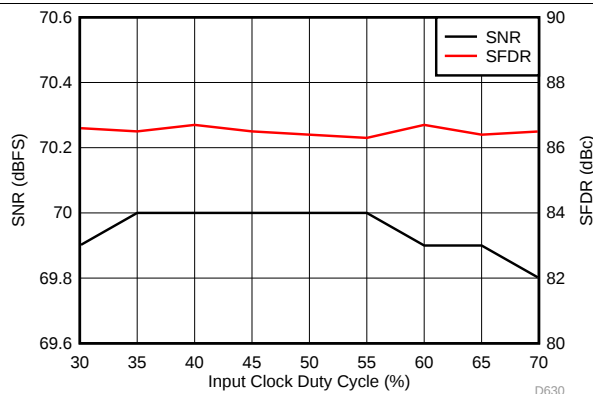


Figure 60. Performance vs Clock Duty Cycle (150 MHz)


7.17 Typical Characteristics: ADC3223

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1-dBFS differential input, $2-V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

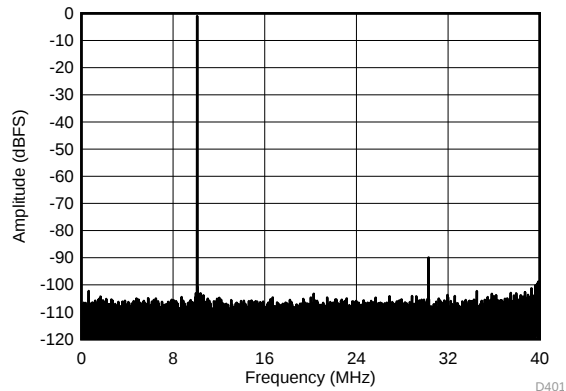


SFDR = 88.9 dBc, SNR = 70.9 dBFS, SINAD = 70.8 dBFS,
THD = 88.6 dBc, HD2 = 108.1 dBc, HD3 = 88.9 dBc

Figure 61. FFT for 10-MHz Input Signal (Dither On)

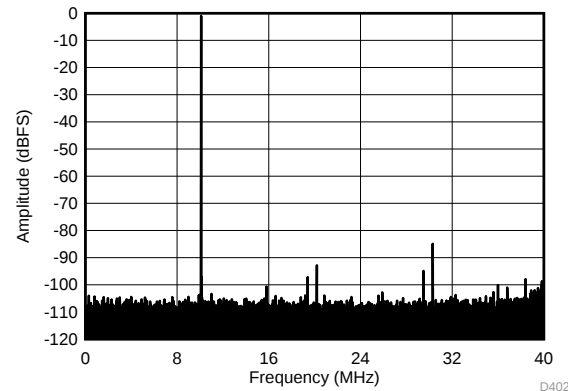


SFDR = 83.9 dBc, SNR = 71.1 dBFS, SINAD = 70.9 dBFS,
THD = 82.6 dBc, HD2 = 91.8 dBc, HD3 = 83.9 dBc

Figure 62. FFT for 10-MHz Input Signal (Dither Off)

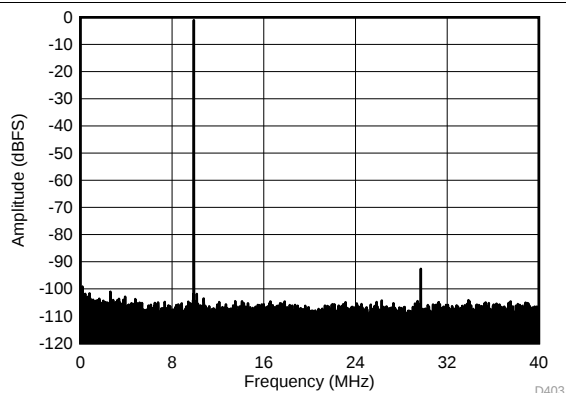


SFDR = 91.6 dBc, SNR = 70.8 dBFS, SINAD = 70.8 dBFS,
THD = 91 dBc, HD2 = 112.2 dBc, HD3 = 91.6 dBc

Figure 63. FFT for 70-MHz Input Signal (Dither On)

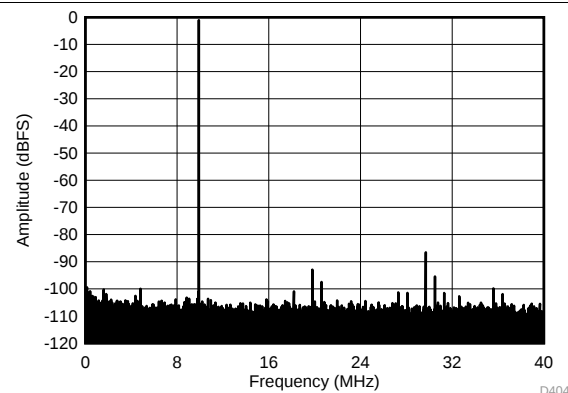


SFDR = 85.5 dBc, SNR = 71.1 dBFS, SINAD = 70.9 dBFS,
THD = 83.8 dBc, HD2 = 91.9 dBc, HD3 = 85.5 dBc

Figure 64. FFT for 70-MHz Input Signal (Dither Off)

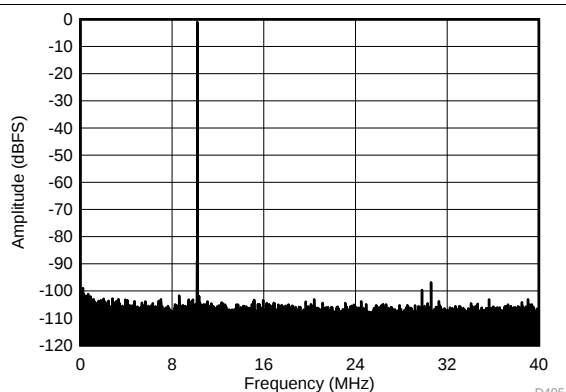

SFDR = 95.8 dBc, SNR = 70.4 dBFS, SINAD = 70.3 dBFS,
THD = 92.9 dBc, HD2 = 102.1 dBc, HD3 = 95.8 dBc

Figure 65. FFT for 170-MHz Input Signal (Dither On)

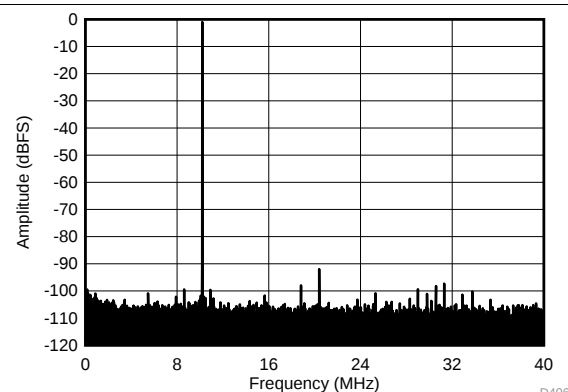


SFDR = 91.0 dBc, SNR = 70.7 dBFS, SINAD = 70.6 dBFS,
THD = 88 dBc, HD2 = 91.0 dBc, HD3 = 97.2 dBc

Figure 66. FFT for 170-MHz Input Signal (Dither Off)


Typical Characteristics: ADC3223 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

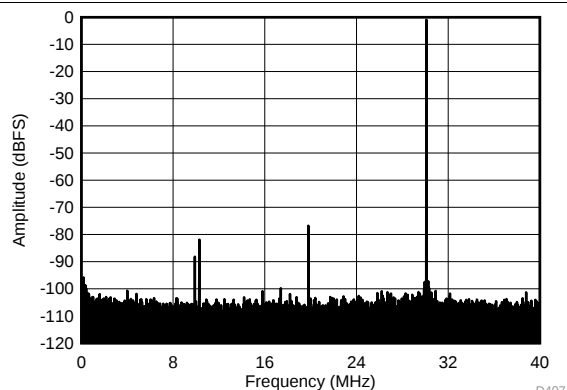


SFDR = 75.8 dBc, SNR = 69.4 dBFS, SINAD = 68.5 dBFS,
THD = 74.6 dBc, HD2 = 75.8 dBc, HD3 = 80.9 dBc

Figure 67. FFT for 270-MHz Input Signal (Dither On)

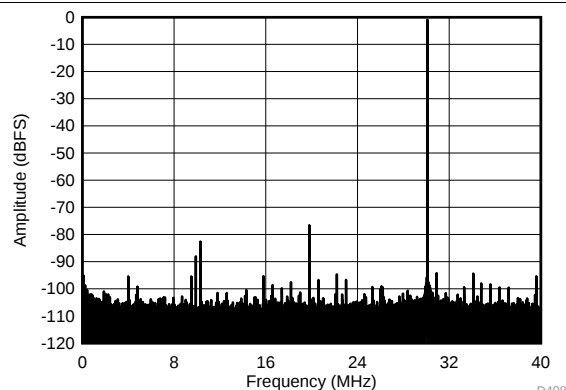


SFDR = 75.6 dBc, SNR = 69.7 dBFS, SINAD = 68.6 dBFS,
THD = 74.5 dBc, HD2 = 75.6 dBc, HD3 = 81.6 dBc

Figure 68. FFT for 270-MHz Input Signal (Dither Off)

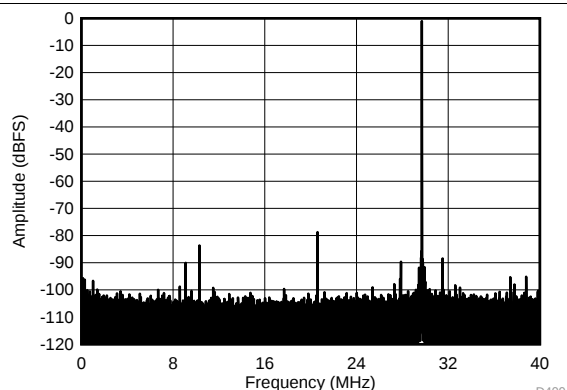


SFDR = 77.7 dBc, SNR = 67.7 dBFS, SINAD = 67.3 dBFS,
THD = 77.2 dBc, HD2 = 77.7 dBc, HD3 = 89.0 dBc

Figure 69. FFT for 450-MHz Input Signal (Dither On)

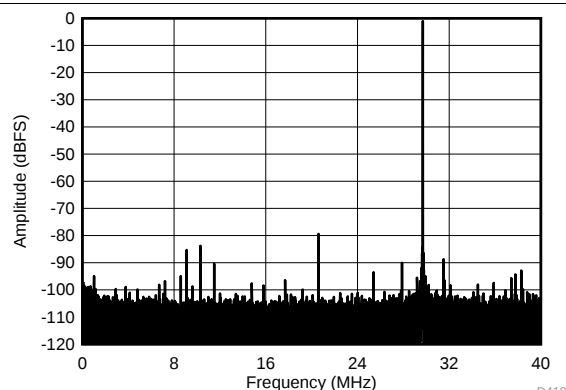


SFDR = 78.4 dBc, SNR = 67.9 dBFS, SINAD = 67.5 dBFS,
THD = 77 dBc, HD2 = 78.4 dBc, HD3 = 84.3 dBc

Figure 70. FFT for 450-MHz Input Signal (Dither Off)

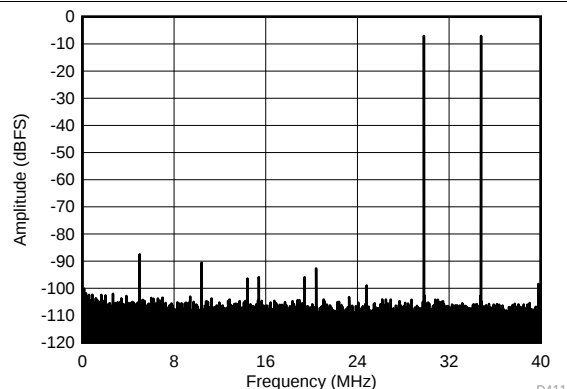

$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 87.5 dBFS,
each tone at -7 dBFS

Figure 71. FFT for Two-Tone Input Signal
(-7 dBFS at 46 MHz and 50 MHz)

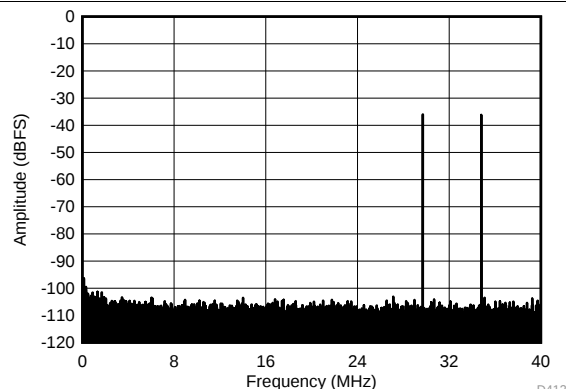


$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 105 dBFS,
each tone at -36 dBFS


Figure 72. FFT for Two-Tone Input Signal
(-36 dBFS at 46 MHz and 50 MHz)

Typical Characteristics: ADC3223 (continued)


typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $AV_{DD} = 1.8\text{ V}$, $DV_{DD} = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

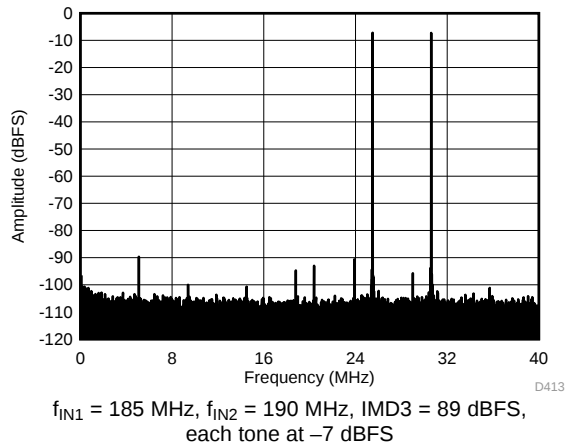


**Figure 73. FFT FOR Two-Tone Input Signal
(-7 dBFS at 185 MHz and 190 MHz)**

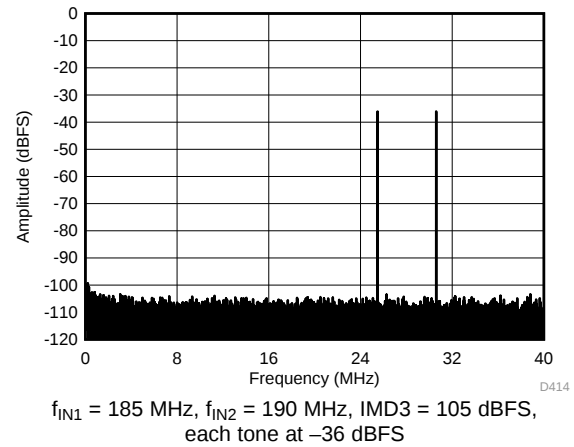

**Figure 74. FFT FOR Two-Tone Input Signal
(-36 dBFS at 185 MHz and 190 MHz)**

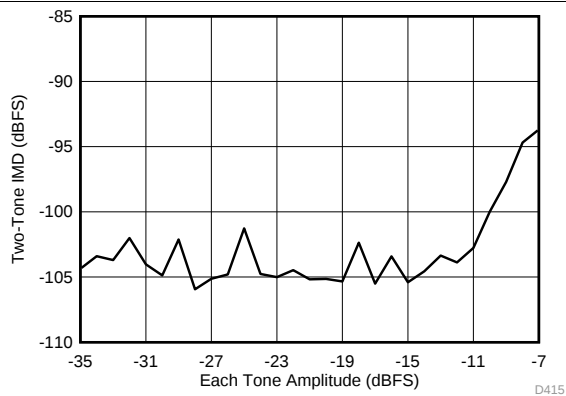

**Figure 75. Intermodulation Distortion vs Input Amplitude
(46 MHz and 50 MHz)**

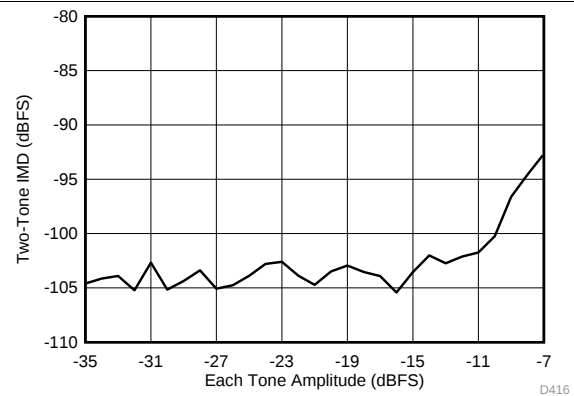

**Figure 76. Intermodulation Distortion vs Input Amplitude
(185 MHz and 190 MHz)**


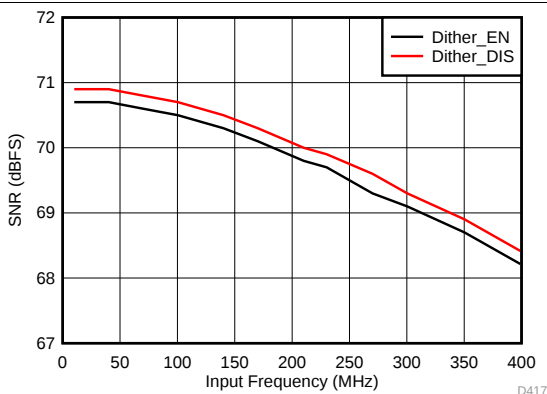


Figure 77. Signal-to-Noise Ratio vs Input Frequency

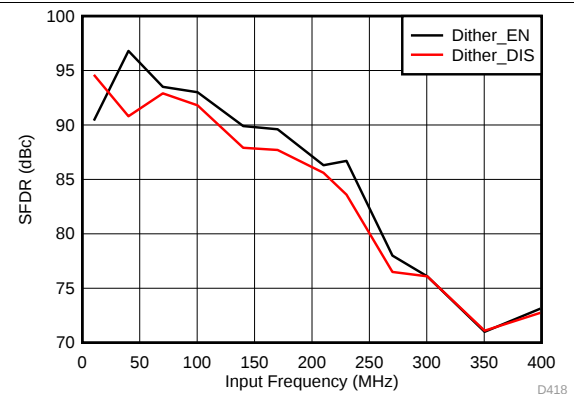

**Figure 78. Spurious-Free Dynamic Range vs
Input Frequency**

Typical Characteristics: ADC3223 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, AVDD = 1.8 V, DVDD = 1.8 V, –1-dBFS differential input, 2- V_{PP} full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

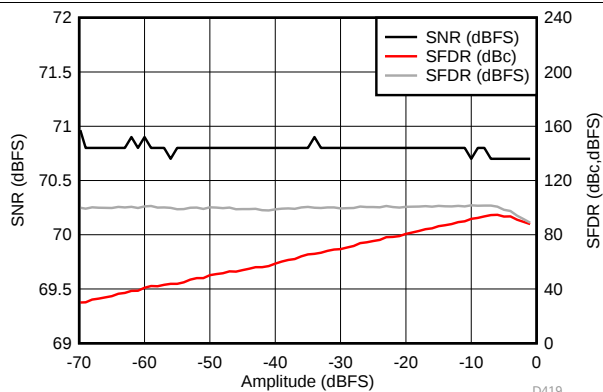


Figure 79. Performance vs Input Amplitude (30 MHz)

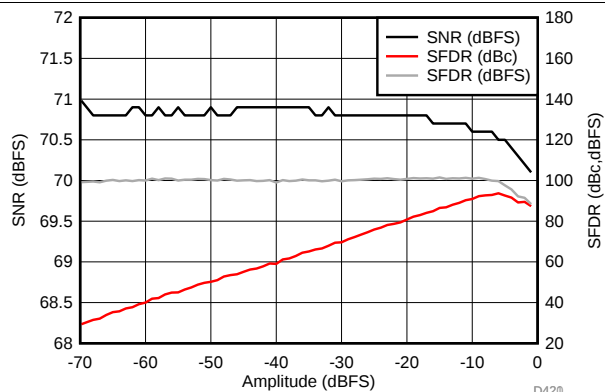


Figure 80. Performance vs Input Amplitude (170 MHz)

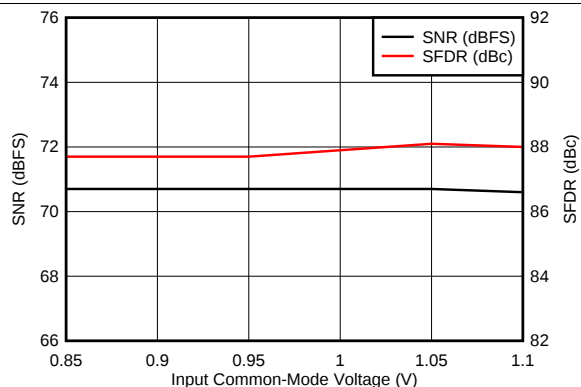


Figure 81. Performance vs Input Common-Mode Voltage (30 MHz)

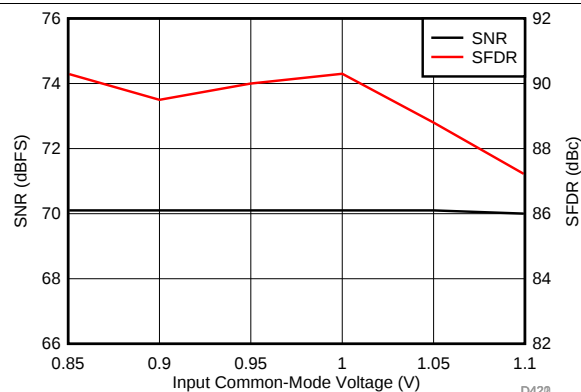


Figure 82. Performance vs Input Common-Mode Voltage (170 MHz)

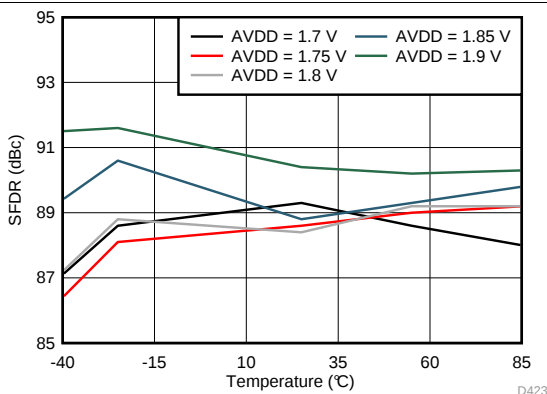


Figure 83. Spurious-Free Dynamic Range vs AVDD Supply and Temperature (170 MHz)

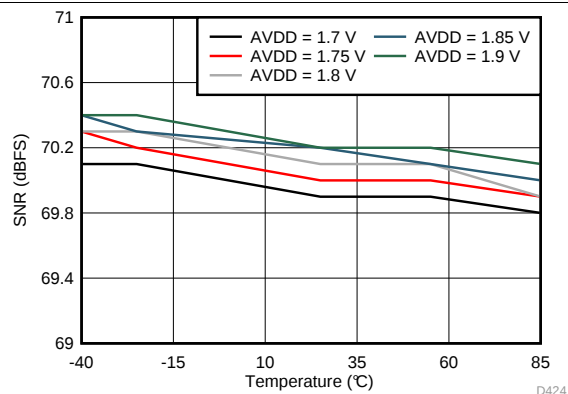


Figure 84. Signal-to-Noise Ratio vs AVDD Supply and Temperature (170 MHz)

Typical Characteristics: ADC3223 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 80 MSPS, 50% clock duty cycle, $AV_{DD} = 1.8\text{ V}$, $DV_{DD} = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

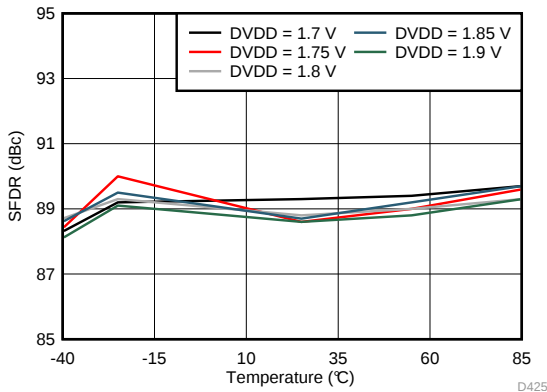


Figure 85. Spurious-Free Dynamic Range vs DVDD Supply and Temperature (170 MHz)

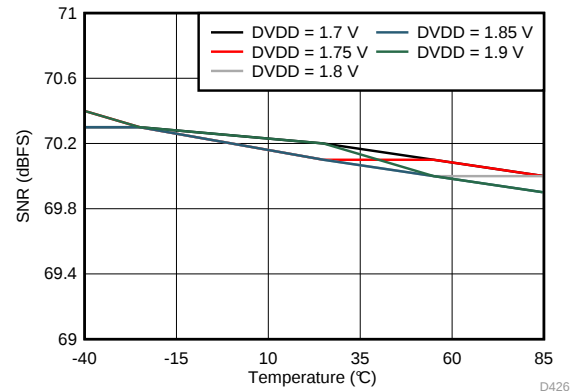


Figure 86. Signal-to-Noise Ratio vs DVDD Supply and Temperature (170 MHz)

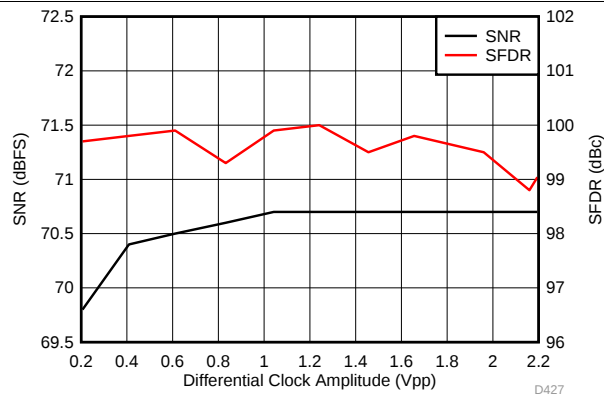


Figure 87. Performance vs Differential Clock Amplitude (40 MHz)

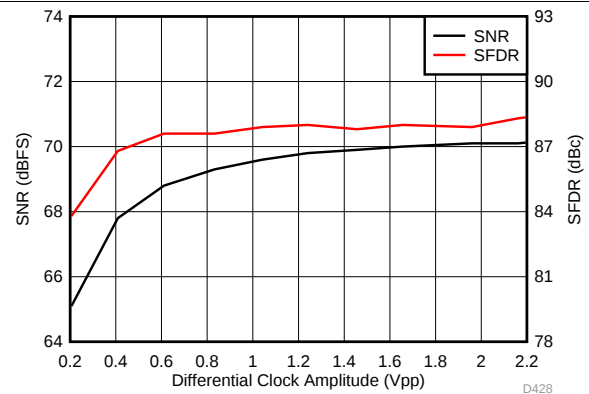


Figure 88. Performance vs Differential Clock Amplitude (150 MHz)

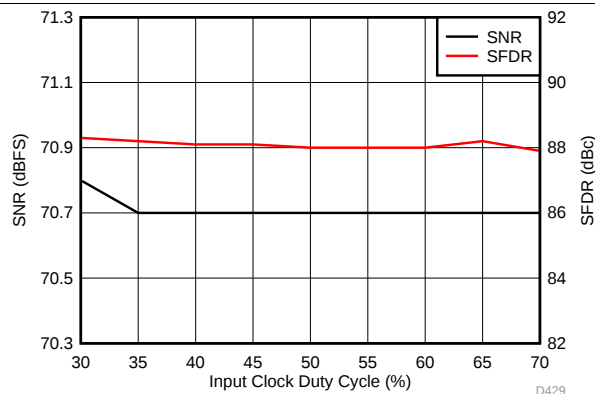


Figure 89. Performance vs Clock Duty Cycle (30 MHz)


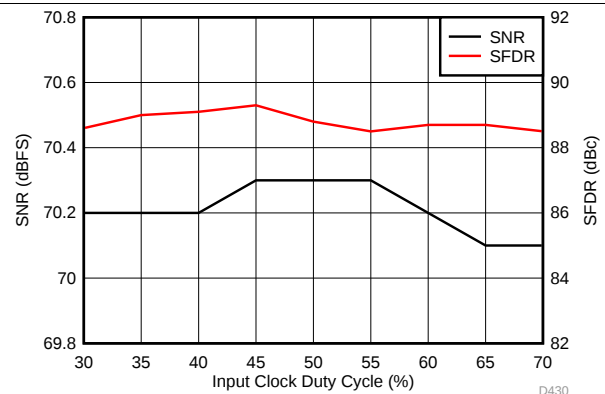


Figure 90. Performance vs Clock Duty Cycle (150 MHz)


7.18 Typical Characteristics: ADC3224

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2-V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

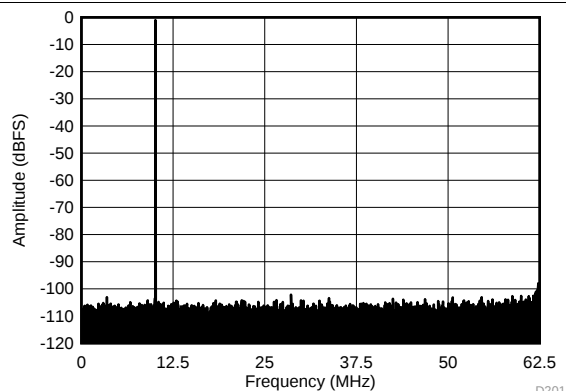


SFDR = 101.1 dBc, SNR = 70.6 dBFS, SINAD = 70.6 dBFS,
THD = 97.6 dBc, HD2 = 107.0 dBc, HD3 = 106.0 dBc

**Figure 91. FFT for 10 MHz Input Signal
(Chopper On, Dither On)**

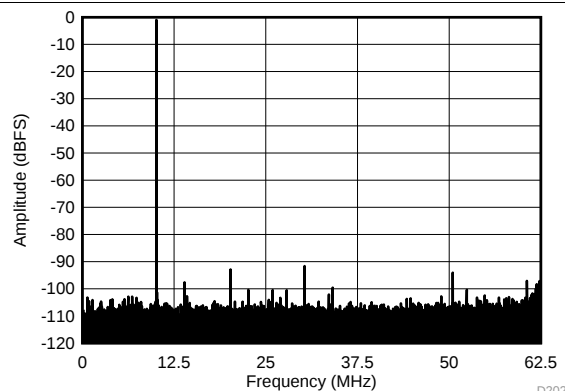


SFDR = 90.6 dBc, SNR = 70.9 dBFS, SINAD = 70.8 dBFS,
THD = 86 dBc, HD2 = 91.8 dBc, HD3 = 90.6 dBc

**Figure 92. FFT for 10-MHz Input Signal
(Chopper On, Dither Off)**

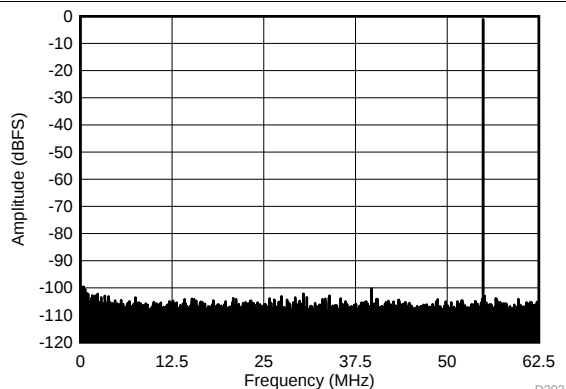


SFDR = 99.2 dBc, SNR = 70.5 dBFS, SINAD = 70.5 dBFS,
THD = 94.8 dBc, HD2 = 102.9 dBc, HD3 = 99.2 dBc

Figure 93. FFT for 70-MHz Input Signal (Dither On)

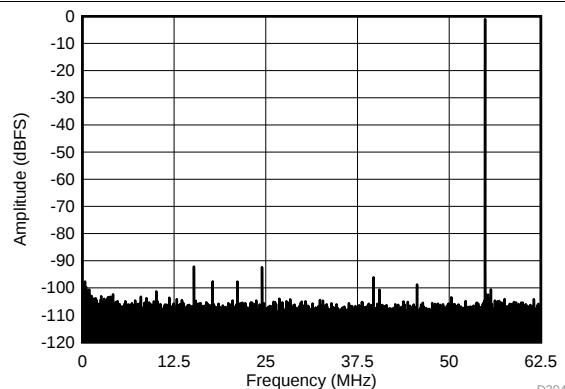


SFDR = 91.1 dBc, SNR = 70.8 dBFS, SINAD = 70.8 dBFS,
THD = 86.8 dBc, HD2 = 91.1 dBc, HD3 = 95.1 dBc

Figure 94. FFT for 70-MHz Input Signal (Dither Off)

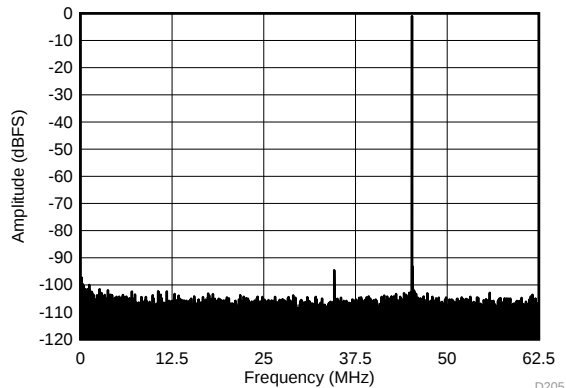

SFDR = 93.6 dBc, SNR = 70.0 dBFS, SINAD = 70.0 dBFS,
THD = 91.4 dBc, HD2 = 93.6 dBc, HD3 = 101.3 dBc

Figure 95. FFT for 170-MHz Input Signal (Dither On)

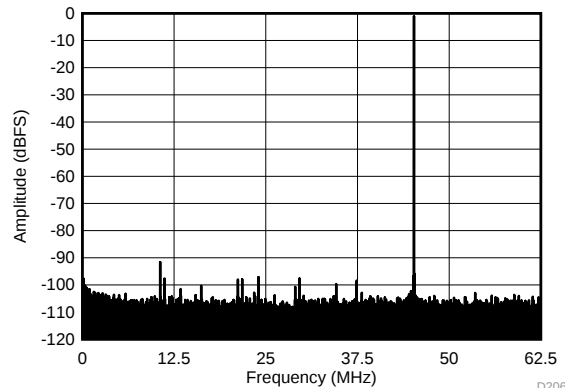


SFDR = 90.6 dBc, SNR = 70.5 dBFS, SINAD = 70.4 dBFS,
THD = 87.8 dBc, HD2 = 98.6 dBc, HD3 = 90.6 dBc

Figure 96. FFT for 170 MHz Input Signal (Dither Off)


Typical Characteristics: ADC3224 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

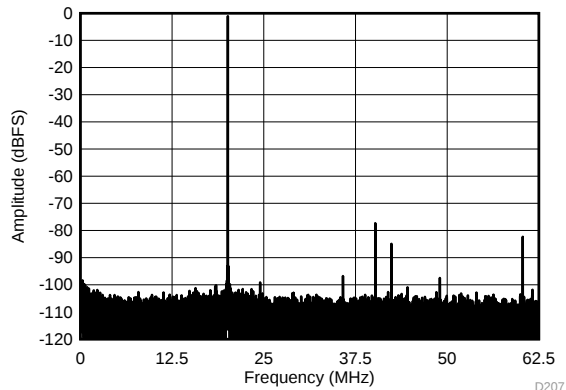


SFDR = 76.2 dBc, SNR = 69.4 dBFS, SINAD = 68.6 dBFS,
THD = 74.9 dBc, HD2 = 76.2 dBc, HD3 = 81.2 dBc

Figure 97. FFT for 270-MHz Input Signal (Dither On)

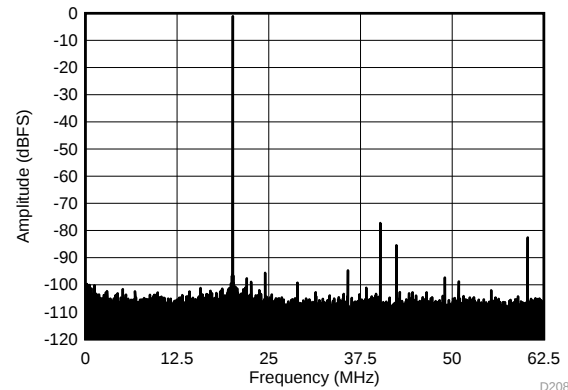


SFDR = 76.1 dBc, SNR = 69.7 dBFS, SINAD = 68.8 dBFS,
THD = 74.9 dBc, HD2 = 76.1 dBc, HD3 = 81.5 dBc

Figure 98. FFT for 270-MHz Input Signal (Dither Off)

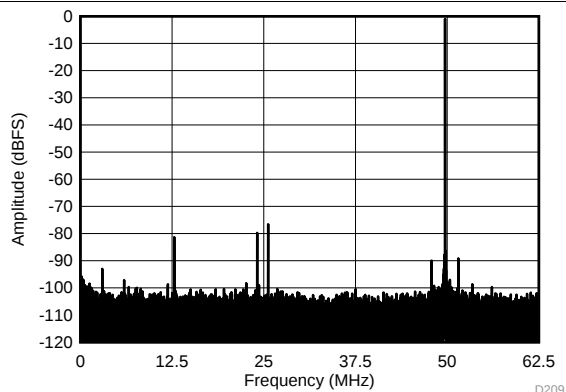


SFDR = 75.5 dBc, SNR = 67.4 dBFS, SINAD = 66.7 dBFS,
THD = 73.8 dBc, HD2 = 75.5 dBc, HD3 = 78.7 dBc

Figure 99. FFT for 450-MHz Input Signal (Dither On)

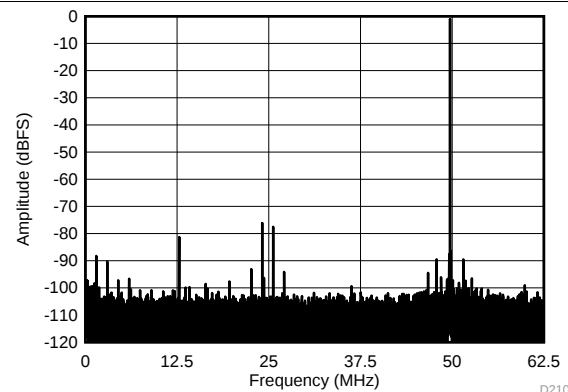


SFDR = 75.2 dBc, SNR = 68 dBFS, SINAD = 67.0 dBFS,
THD = 72.5 dBc, HD2 = 76.5 dBc, HD3 = 75.2 dBc

Figure 100. FFT for 450-MHz Input Signal (Dither Off)

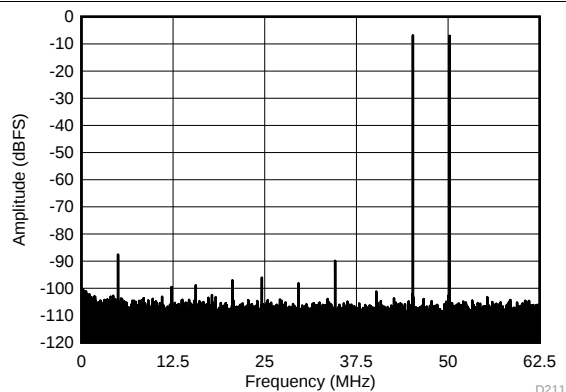

$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 88 dBFS,
each tone at -7 dBFS

**Figure 101. FFT for Two-Tone Input Signal
(-7 dBFS at 46 MHz and 50 MHz)**

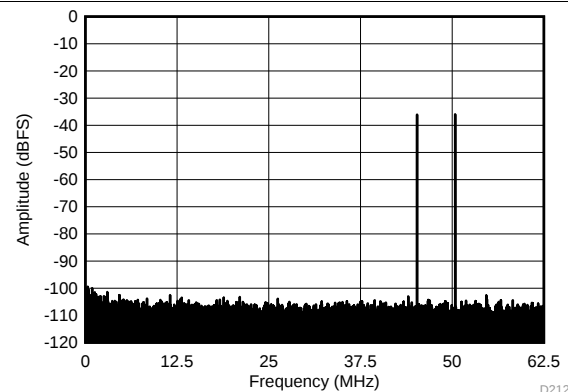


$f_{IN1} = 46\text{ MHz}$, $f_{IN2} = 50\text{ MHz}$, IMD3 = 105 dBFS,
each tone at -36 dBFS


**Figure 102. FFT for Two-Tone Input Signal
(-36 dBFS at 46 MHz and 50 MHz)**

Typical Characteristics: ADC3224 (continued)


typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

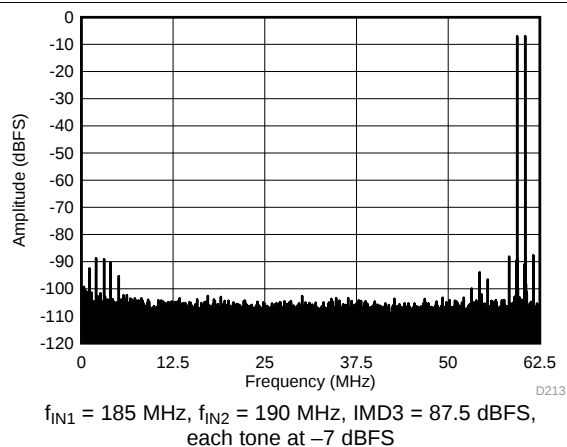


**Figure 103. FFT for Two-Tone Input Signal
(-7 dBFS at 185 MHz and 190 MHz)**

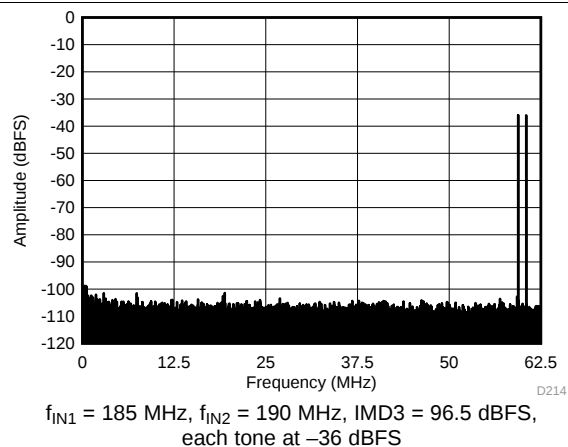

**Figure 104. FFT for Two-Tone Input Signal
(-36 dBFS at 185 MHz and 190 MHz)**

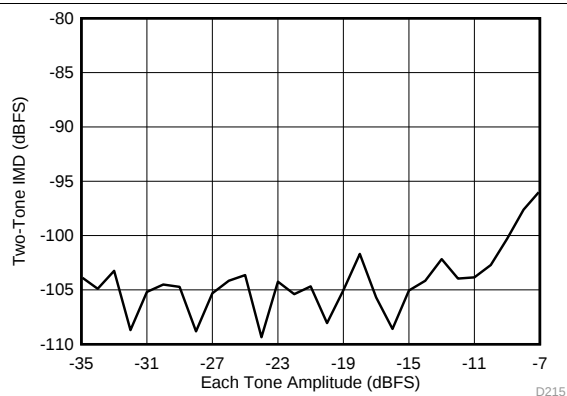

**Figure 105. Intermodulation Distortion vs Input Amplitude
(46 MHz and 50 MHz)**

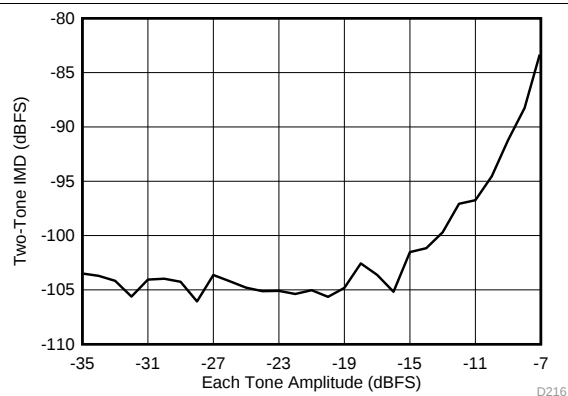

**Figure 106. Intermodulation Distortion vs Input Amplitude
(185 MHz and 190 MHz)**


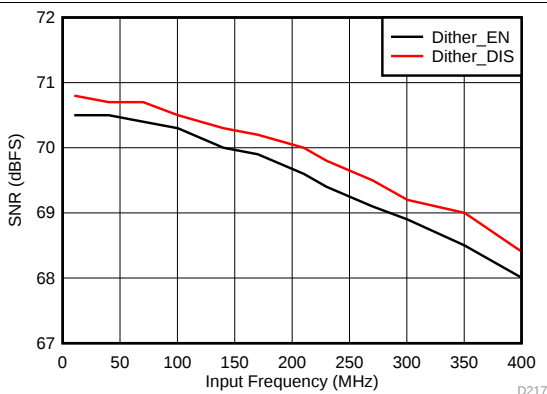


Figure 107. Signal-to-Noise Ratio vs Input Frequency

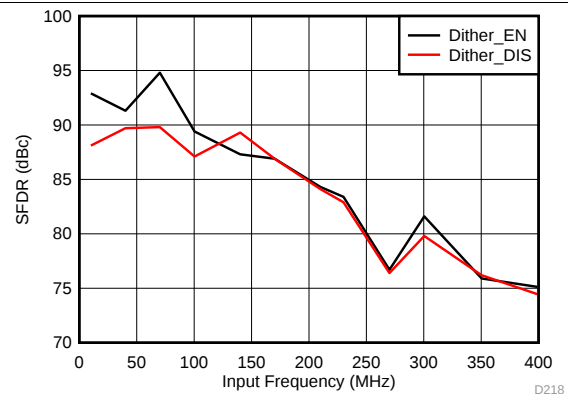

**Figure 108. Spurious-Free Dynamic Range vs
Input Frequency**

Typical Characteristics: ADC3224 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

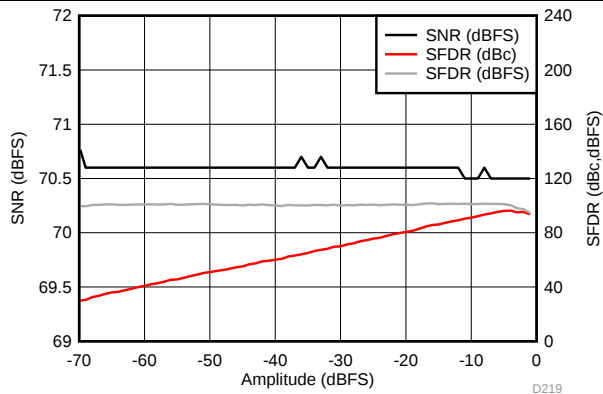


Figure 109. Performance vs Input Amplitude (30 MHz)

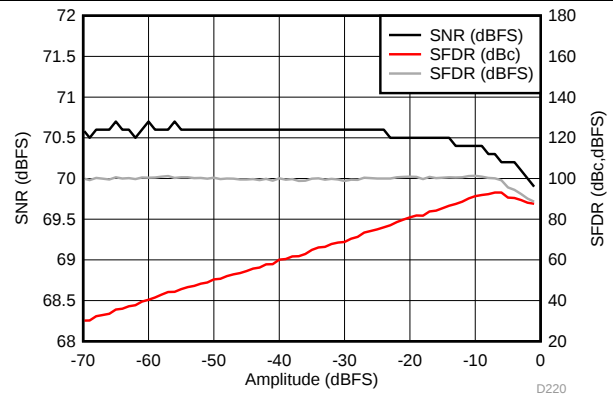


Figure 110. Performance vs Input Amplitude (170 MHz)

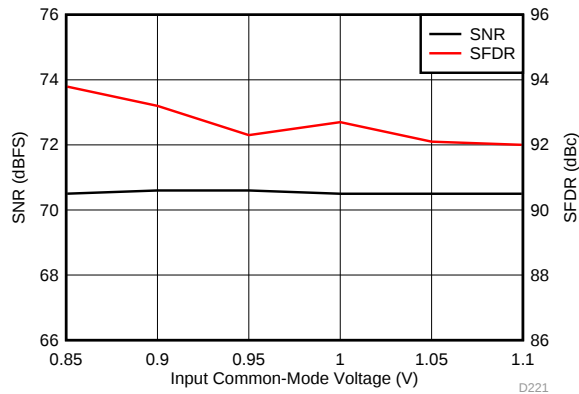


Figure 111. Performance vs Input Common-Mode Voltage (30 MHz)

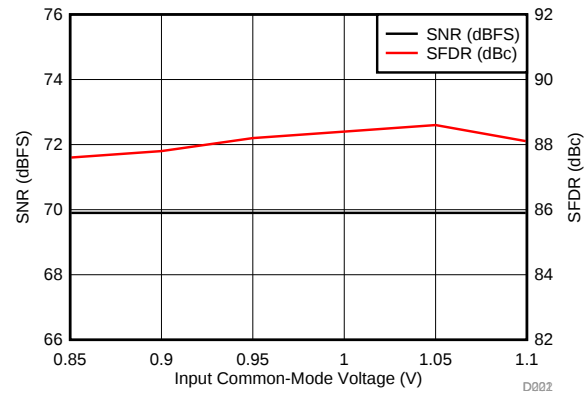


Figure 112. Performance vs Input Common-Mode Voltage (170 MHz)

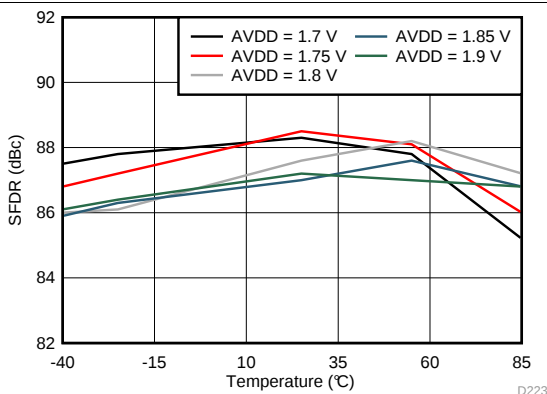


Figure 113. Spurious-Free Dynamic Range vs AVDD Supply and Temperature (170 MHz)

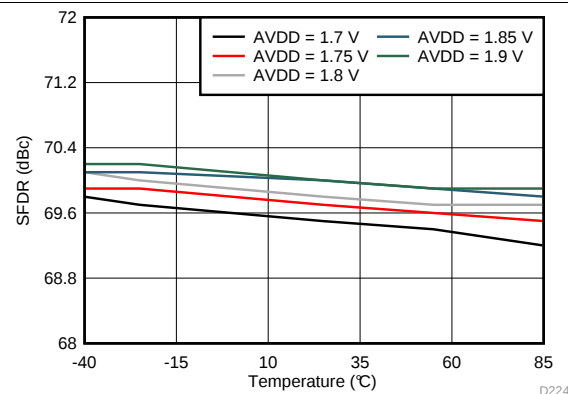


Figure 114. Signal-to-Noise Ratio vs AVDD Supply and Temperature (170 MHz)

Typical Characteristics: ADC3224 (continued)

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

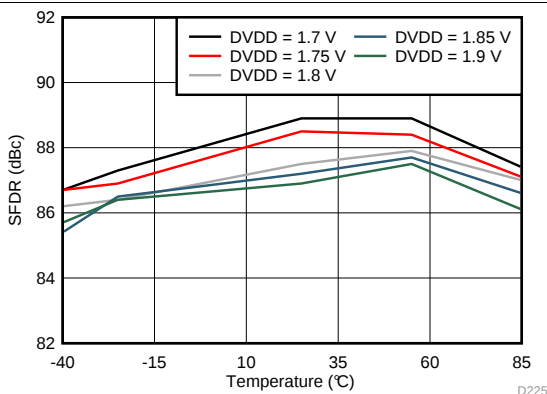


Figure 115. Spurious-Free Dynamic Range vs DVDD Supply and Temperature (170 MHz)

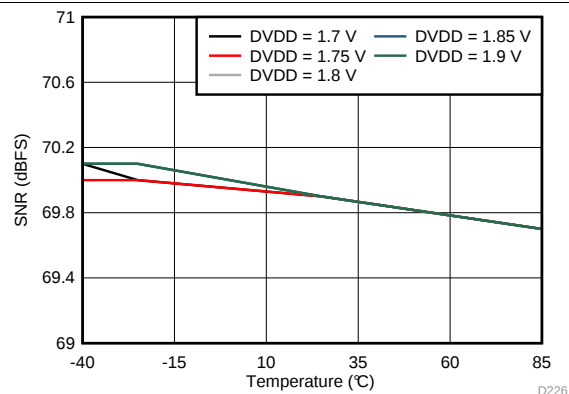


Figure 116. Signal-to-Noise Ratio vs DVDD Supply and Temperature (170 MHz)

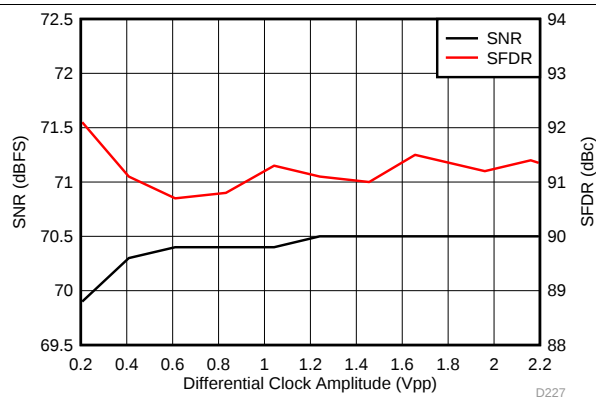


Figure 117. Performance vs Differential Clock Amplitude (40 MHz)

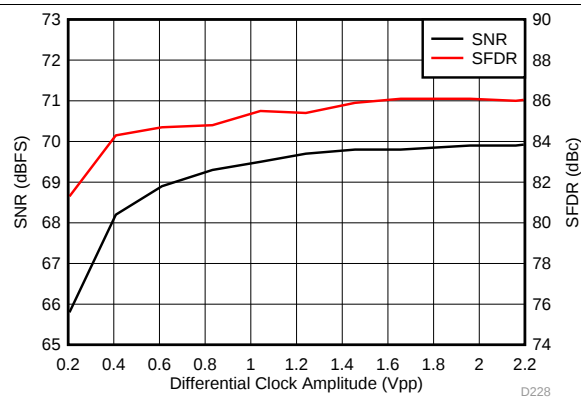


Figure 118. Performance vs Differential Clock Amplitude (150 MHz)

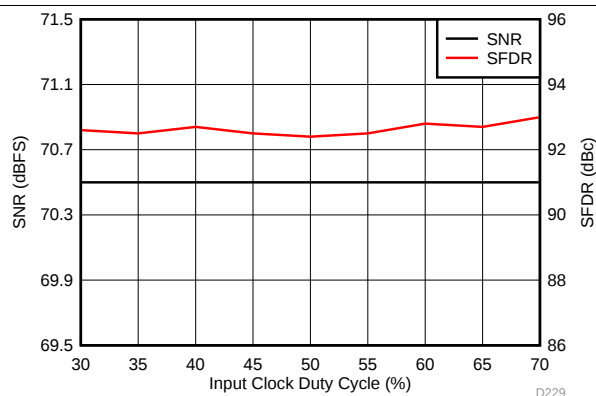


Figure 119. Performance vs Clock Duty Cycle (30 MHz)

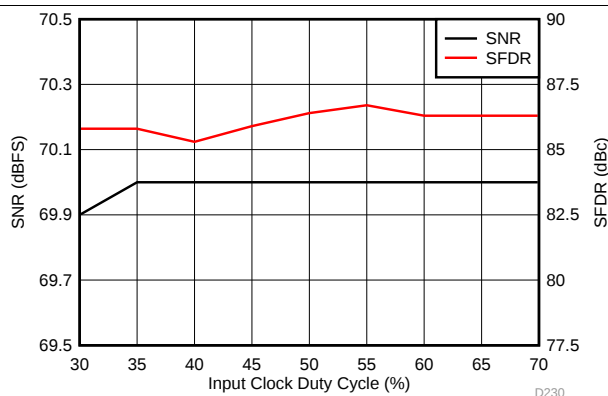


Figure 120. Performance vs Clock Duty Cycle (150 MHz)

7.19 Typical Characteristics: Common

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when chopper is enabled (unless otherwise noted)

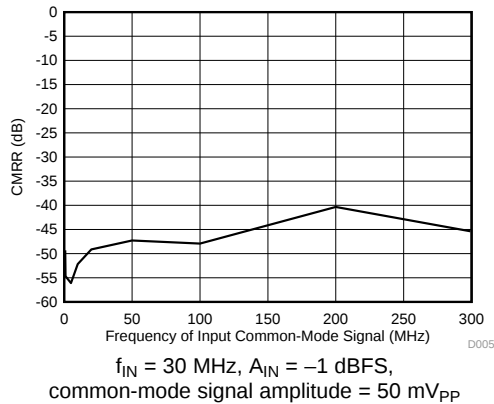


Figure 121. Common-Mode Rejection Ratio vs Common-Mode Signal Frequency

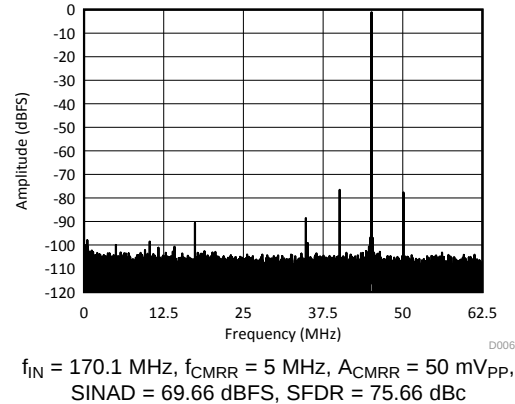


Figure 122. Common-Mode Rejection Ratio Spectrum

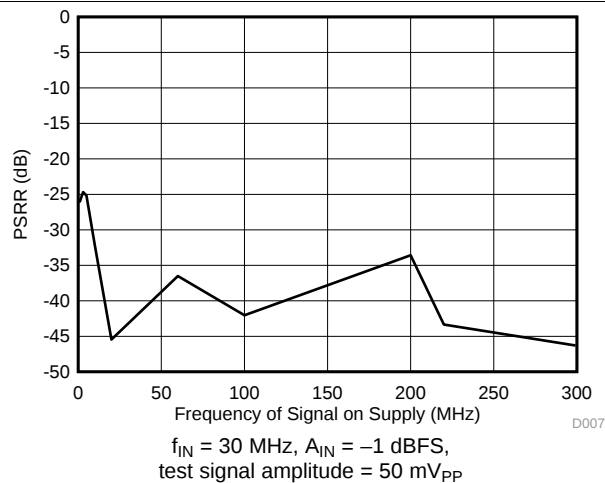


Figure 123. Power-Supply Rejection Ratio vs Power-Supply Signal Frequency

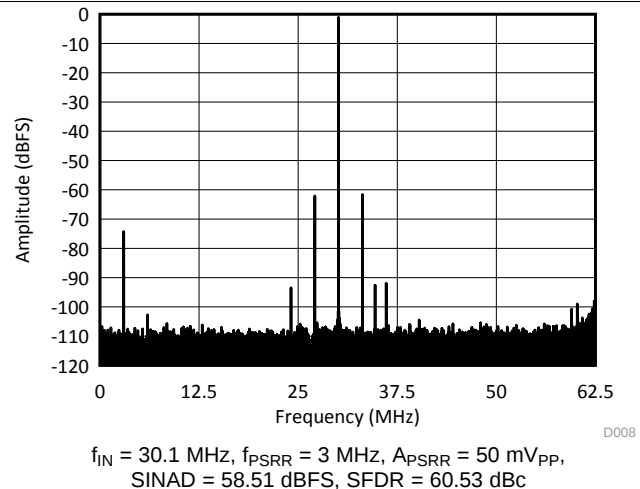


Figure 124. Power-Supply Rejection Ratio Spectrum

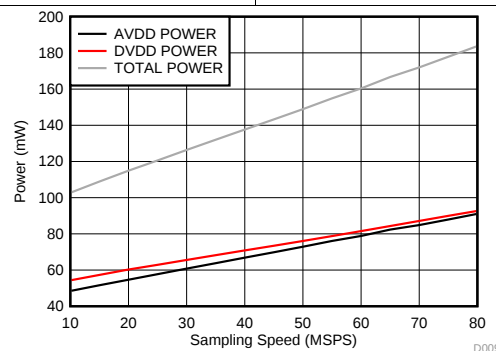


Figure 125. Power vs Sampling Speed (One-Wire Mode)

7.20 Typical Characteristics: Contour

typical values are at $T_A = 25^\circ\text{C}$, ADC sampling rate = 125 MSPS, 50% clock duty cycle, $AVDD = 1.8\text{ V}$, $DVDD = 1.8\text{ V}$, -1 dBFS differential input, $2\text{-}V_{PP}$ full-scale, 32k-point FFT, chopper disabled, and SNR reported with a 1-MHz offset from dc when chopper is disabled and from $f_s / 2$ when is chopper enabled (unless otherwise noted)

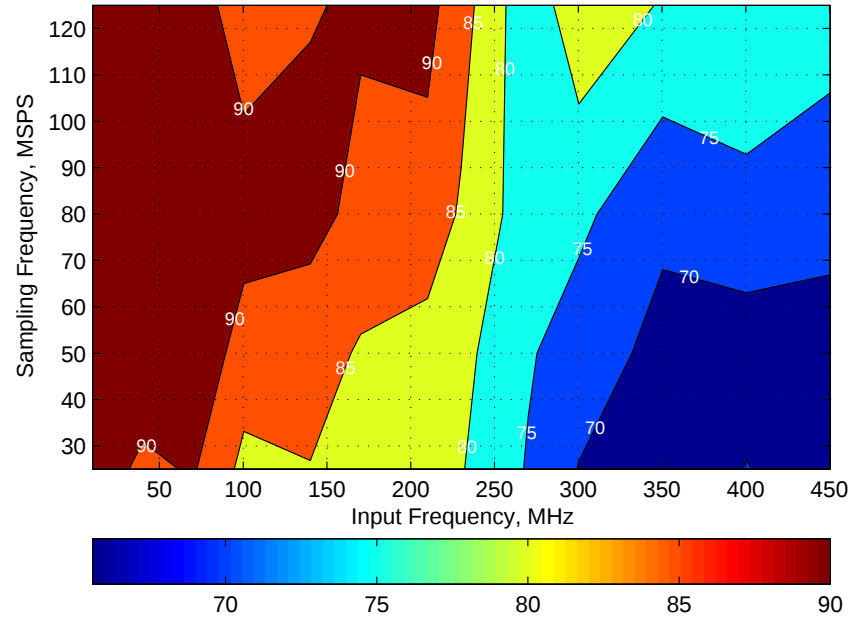


Figure 126. Spurious-Free Dynamic Range (SFDR)


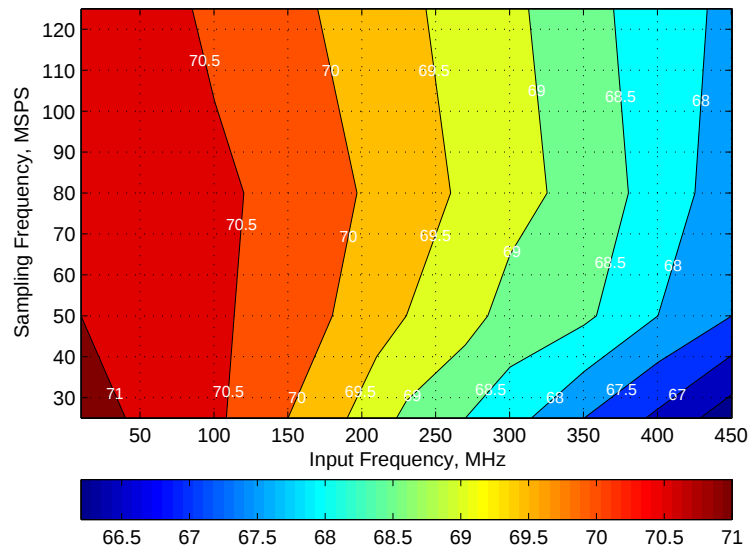


Figure 127. Signal-to-Noise Ratio (SNR)

8 Parametric Measurement Information

8.1 Timing Diagrams

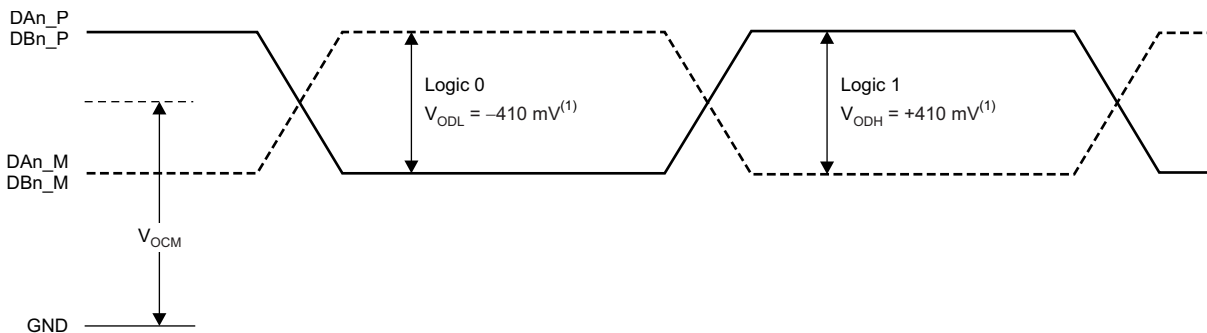

(1) With an external 100-Ω termination.

Figure 128. Serial LVDS Output Voltage Levels

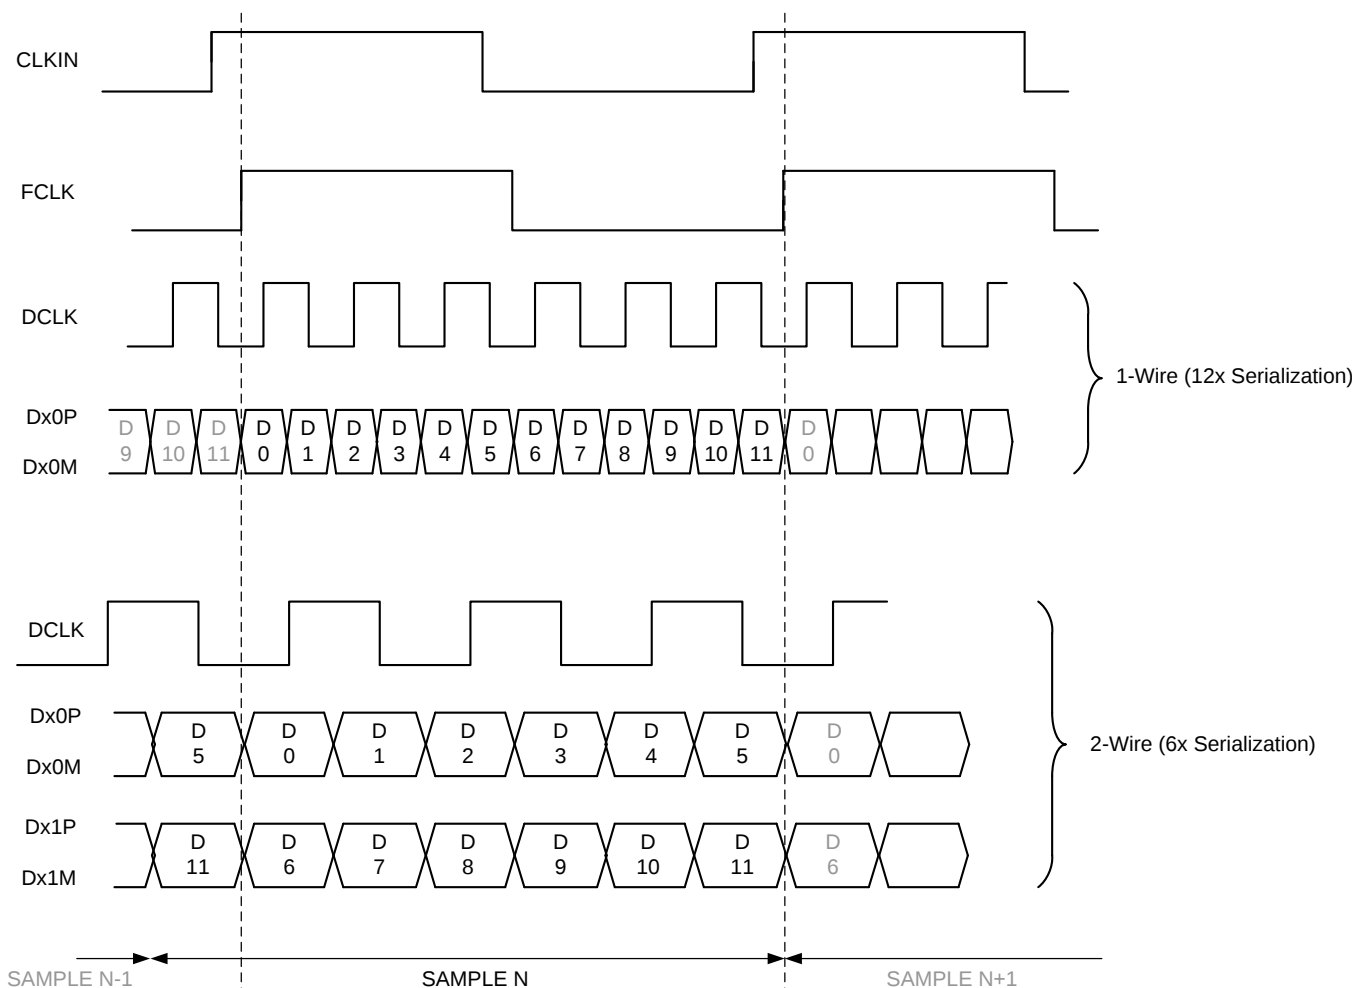


Figure 129. Output Timing Diagram

Timing Diagrams (continued)


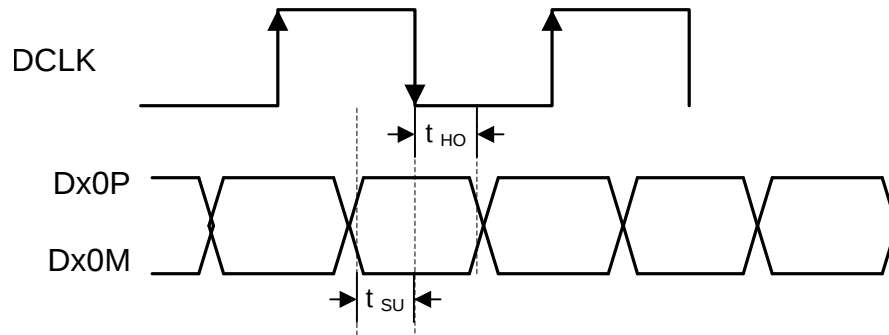


Figure 130. Setup and Hold Time

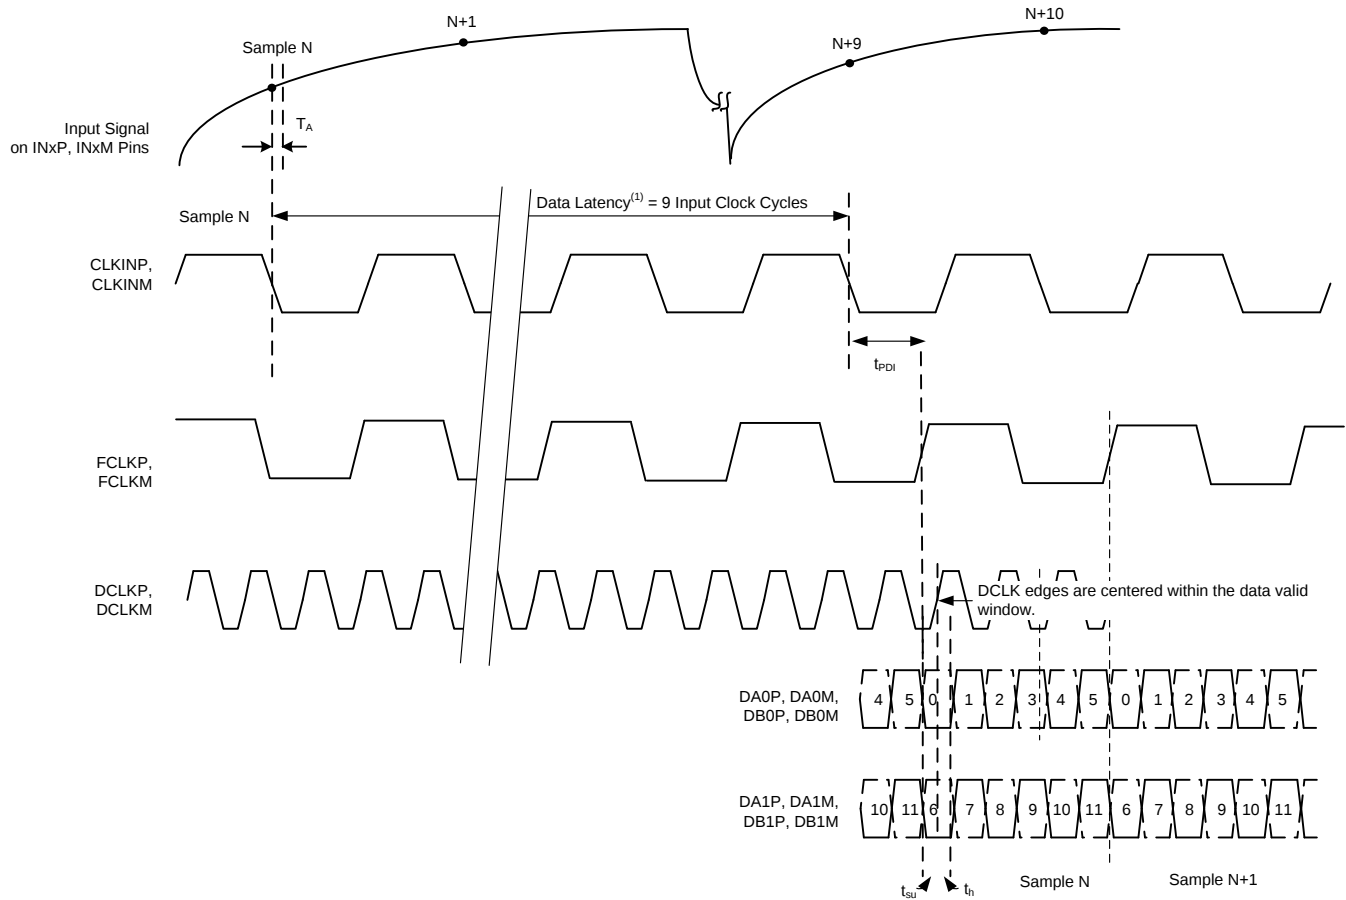

(1) Overall latency = data latency + t_{PD1} .


Figure 131. Latency Diagram

9 Detailed Description

9.1 Overview

The ADC322x are a high-linearity, ultra-low power, dual-channel, 12-bit, 25-MSPS to 125-MSPS, analog-to-digital converter (ADC) family. The ADC322x runs off of a single 1.8-V supply and supports system synchronization through the SYSREF pin. Output data are available in standard LVDS format accompanied with bit-clock and frame-clock outputs.

9.2 Functional Block Diagram

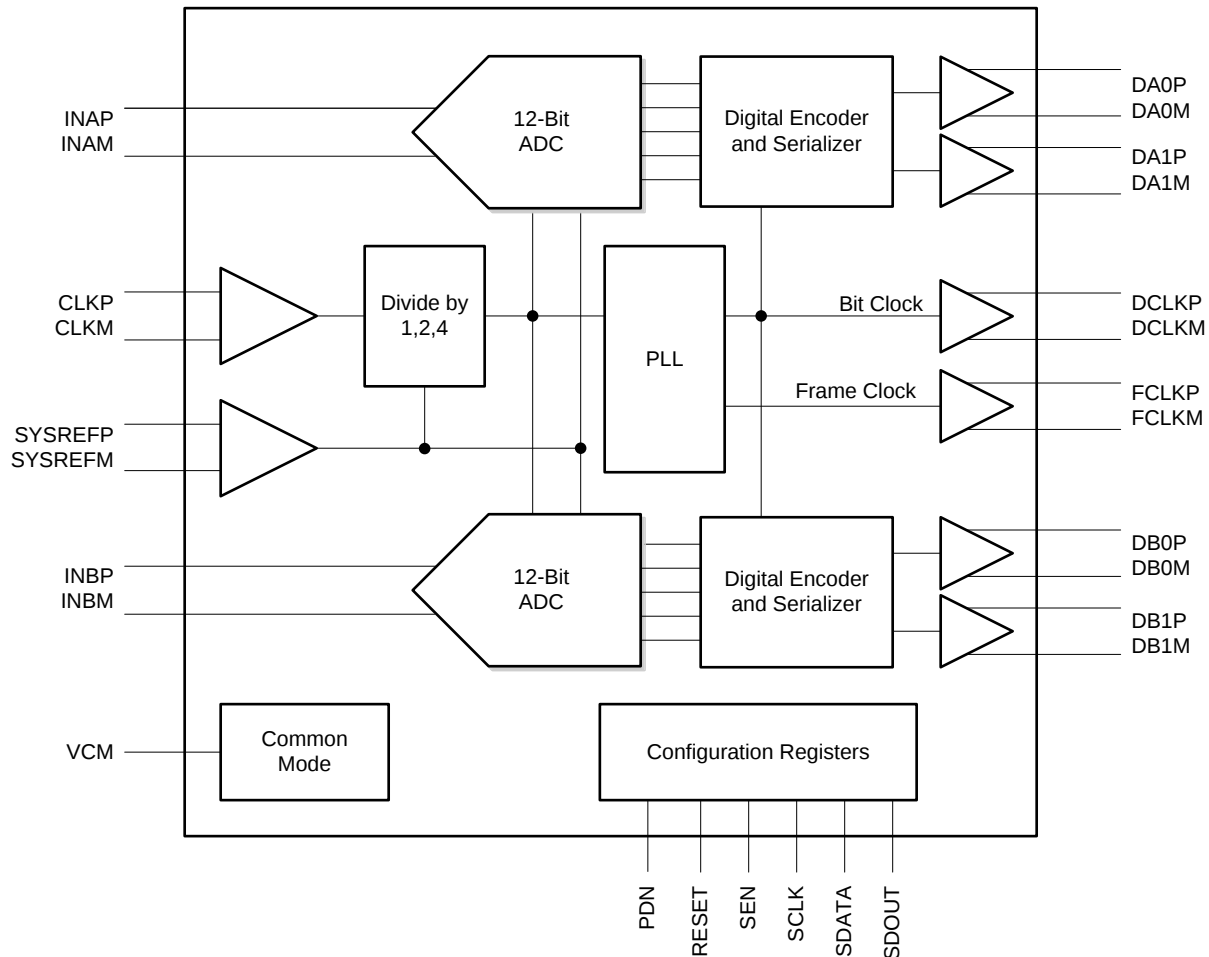


9.3 Feature Description

9.3.1 Analog Inputs

The ADC322x analog signal inputs are designed to be driven differentially. Each input pin (INP, INM) must swing symmetrically between $(V_{CM} + 0.5\text{ V})$ and $(V_{CM} - 0.5\text{ V})$, resulting in a $2\text{-}V_{PP}$ (default) differential input swing. The input sampling circuit has a 3-dB bandwidth that extends up to 540 MHz (50- Ω source driving a 50- Ω termination between INP and INM).

9.3.2 Clock Input

The device clock inputs can be driven differentially (sine, LVPECL, or LVDS) or single-ended (LVCMOS), with little or no difference in performance between them. The common-mode voltage of the clock inputs is set to 0.95 V using internal 5-k Ω resistors. The self-bias clock inputs of the ADC322x can be driven by the transformer-coupled, sine-wave clock source or by the ac-coupled, LVPECL and LVDS clock sources, as shown in Figure 132, Figure 133, and Figure 134. See Figure 135 for details regarding the internal clock buffer.

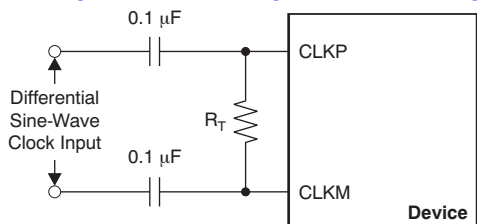

R_T = termination resistor, if necessary.

Figure 132. Differential Sine-Wave Clock Driving Circuit

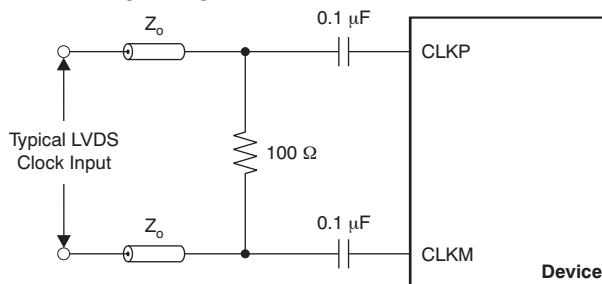


Figure 133. LVDS Clock Driving Circuit


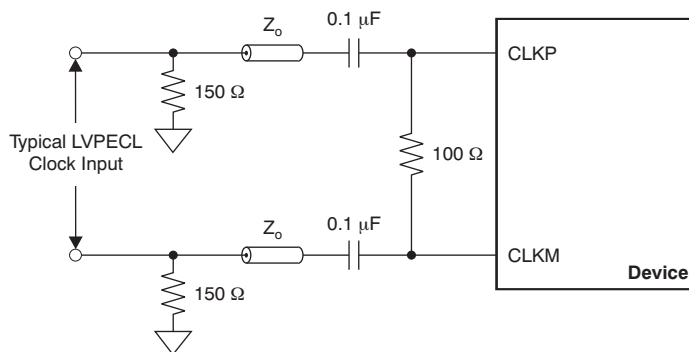


Figure 134. LVPECL Clock Driving Circuit

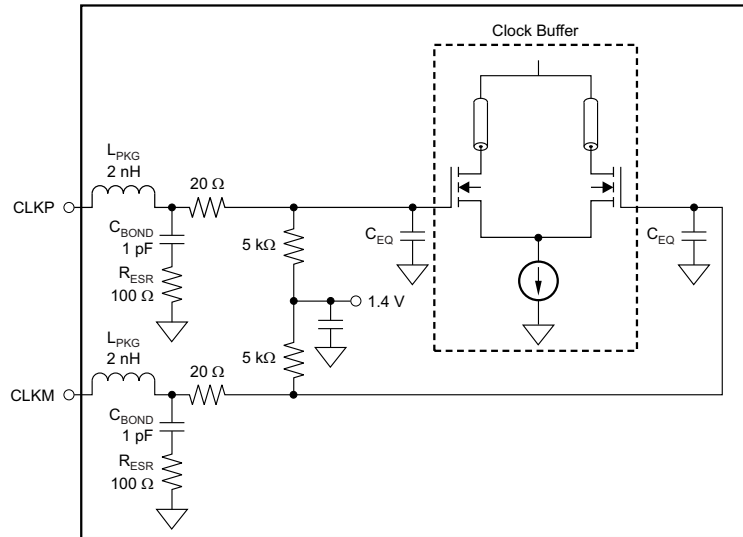

NOTE: C_{EQ} is 1 pF to 3 pF and is the equivalent input capacitance of the clock buffer.

Figure 135. Internal Clock Buffer

A single-ended CMOS clock can be ac-coupled to the CLKP input, with CLKM connected to ground with a 0.1-μF capacitor, as shown in [Figure 136](#). However, for best performance the clock inputs must be driven differentially, thereby reducing susceptibility to common-mode noise. For high input frequency sampling, TI recommends using a clock source with very low jitter. Band-pass filtering of the clock source can help reduce the effects of jitter. There is no change in performance with a non-50% duty cycle clock input.

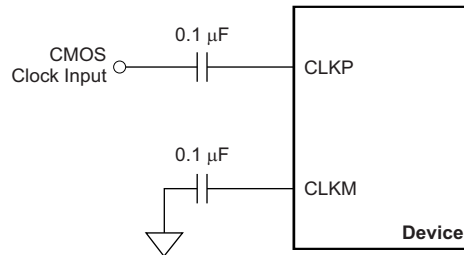


Figure 136. Single-Ended Clock Driving Circuit

9.3.2.1 SNR and Clock Jitter

The signal-to-noise ratio of the ADC is limited by three different factors, as shown in [Equation 1](#). Quantization noise (typically 74 dB for a 12-bit ADC) and thermal noise limit SNR at low input frequencies, and clock jitter sets SNR for higher input frequencies.

$$SNR_{ADC}[dBc] = -20 \cdot \log \sqrt{\left(10^{\frac{SNR_{Quantization\ Noise}}{20}}\right)^2 + \left(10^{\frac{SNR_{Thermal\ Noise}}{20}}\right)^2 + \left(10^{\frac{SNR_{Jitter}}{20}}\right)^2} \quad (1)$$

The SNR limitation resulting from sample clock jitter can be calculated with [Equation 2](#).

$$SNR_{Jitter}[dBc] = -20 \cdot \log(2\pi \cdot f_{in} \cdot T_{Jitter}) \quad (2)$$

The total clock jitter (T_{Jitter}) has two components: the internal aperture jitter (130 fs for the device), which is set by the noise of the clock input buffer, and the external clock. T_{Jitter} can be calculated with [Equation 3](#).

$$T_{Jitter} = \sqrt{(T_{Jitter,Ext.Clock_Input})^2 + (T_{Aperture_ADC})^2} \quad (3)$$

External clock jitter can be minimized by using high-quality clock sources and jitter cleaners as well as band-pass filters at the clock input and a faster clock slew rate improves ADC aperture jitter. The devices have a typical thermal noise of 73.5 dBFS and an internal aperture jitter of 130 fs. The SNR, depending on the amount of external jitter for different input frequencies. Figure 137 shows SNR (from 1 MHz offset leaving the 1/f flicker noise) for different jitter of clock driver.

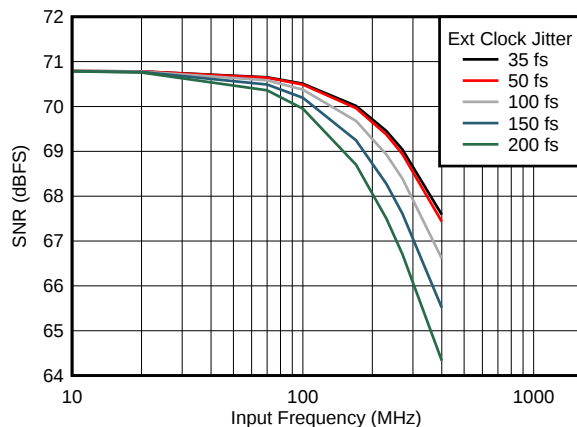


Figure 137. SNR vs Frequency for Different Clock Jitter

9.3.3 Digital Output Interface

The devices offer two different output format options, thus making interfacing to a field-programmable gate array (FPGA) or an application-specific integrated circuit (ASIC) easy. Each option can be easily programmed using the serial interface, as shown in Table 3. The output interface options are:

- One-wire, 1X frame clock, 12X serialization with the DDR bit clock and
- Two-wire, 1X frame clock, 6X serialization with the DDR bit clock.

Table 3. Interface Rates

INTERFACE OPTIONS	SERIALIZATION	MAXIMUM RECOMMENDED SAMPLING FREQUENCY (MSPS)		BIT CLOCK FREQUENCY (MHz)	FRAME CLOCK FREQUENCY (MHz)	SERIAL DATA RATE PER WIRE (Mbps)
		MIN	MAX			
One-wire	12X	15 ⁽¹⁾		90	15	180
			65	390	65	780
Two-wire	6X	20 ⁽¹⁾		60	20	120
			125	375	125	750

(1) Use the LOW SPEED ENABLE register bits for low speed operation; see Table 22.

9.3.3.1 One-Wire Interface: 12X Serialization

In this interface option, the device outputs the data of each ADC serially on a single LVDS pair (one-wire). The data are available at the rising and falling edges of the bit clock (DDR bit clock). The ADC outputs a new word at the rising edge of every frame clock, starting with the MSB. The data rate is a 12X sample frequency (12X serialization).

9.3.3.2 Two-Wire Interface: 6X Serialization

The two-wire interface is recommended for sampling frequencies above 65 MSPS. The output data rate is a 6X sample frequency because six data bits are output every clock cycle on each differential pair. Each ADC sample is sent over the two wires with the six MSBs on Dx1P, Dx1M and the six LSBs on Dx0P, Dx0M, as shown in Figure 138.

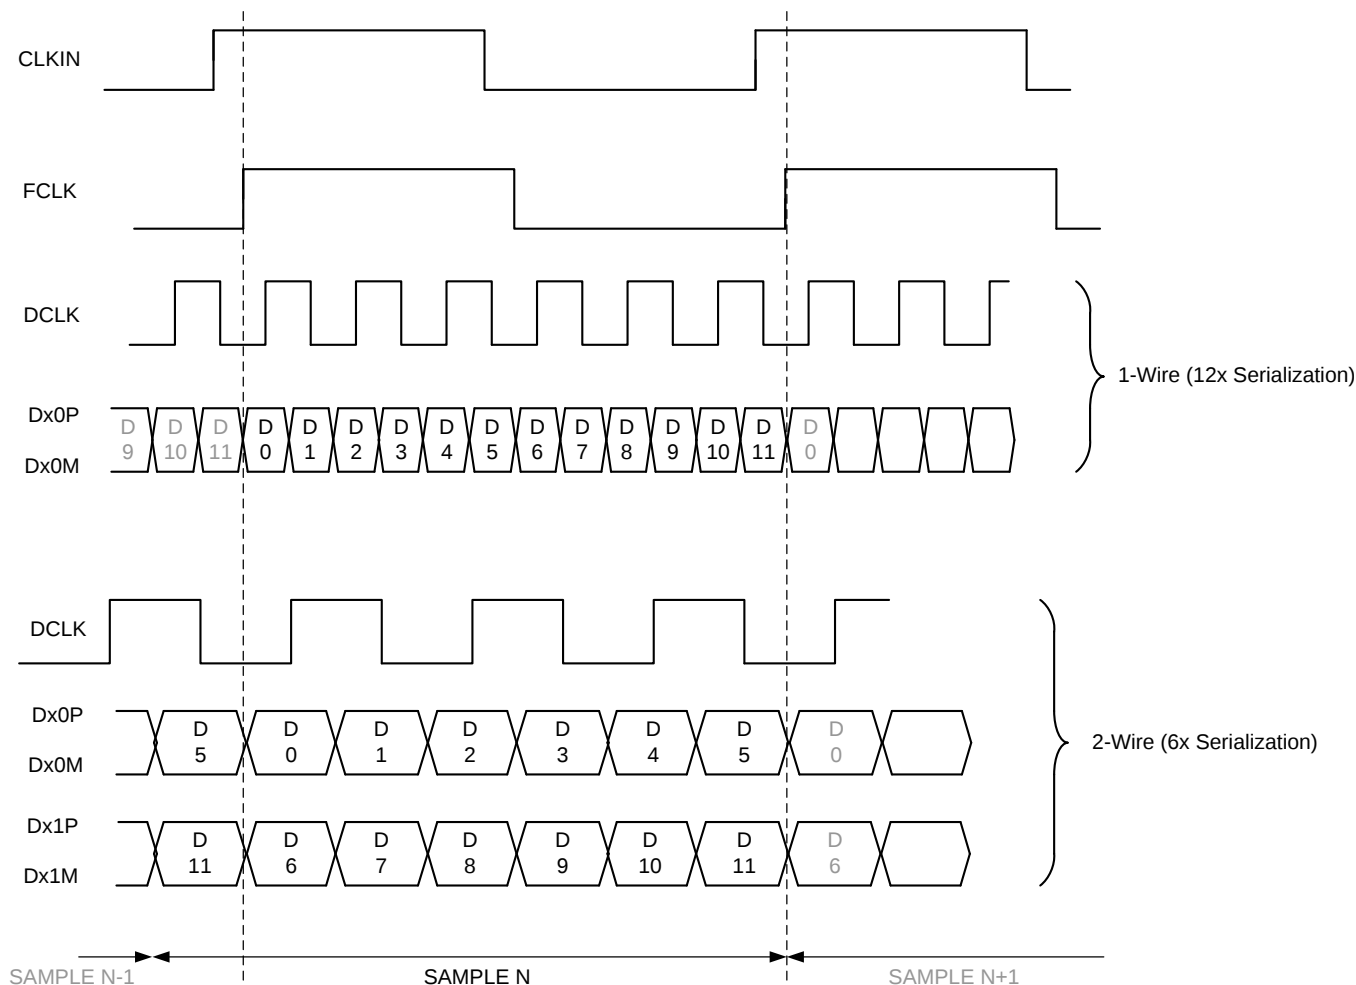


Figure 138. Output Timing Diagram



9.4 Device Functional Modes

9.4.1 Input Clock Divider

The devices are equipped with an internal divider on the clock input. The clock divider allows operation with a faster input clock, thus simplifying the system clock distribution design. The clock divider can be bypassed for operation with a 125-MHz clock; the divide-by-2 option supports a maximum input clock of 250 MHz and the divide-by-4 option provides a maximum input clock frequency of 500 MHz.

9.4.2 Chopper Functionality

The devices are equipped with an internal chopper front-end. Enabling the chopper function swaps the ADC noise spectrum by shifting the $1/f$ noise from dc to $f_S / 2$. [Figure 139](#) shows the noise spectrum with the chopper off and [Figure 140](#) shows the noise spectrum with the chopper on. This function is especially useful in applications requiring good ac performance at low input frequencies or in dc-coupled applications. The chopper can be enabled via SPI register writes and is recommended for input frequencies below 30 MHz. The chopper function creates a spur at $f_S / 2$ that must be filtered out digitally.

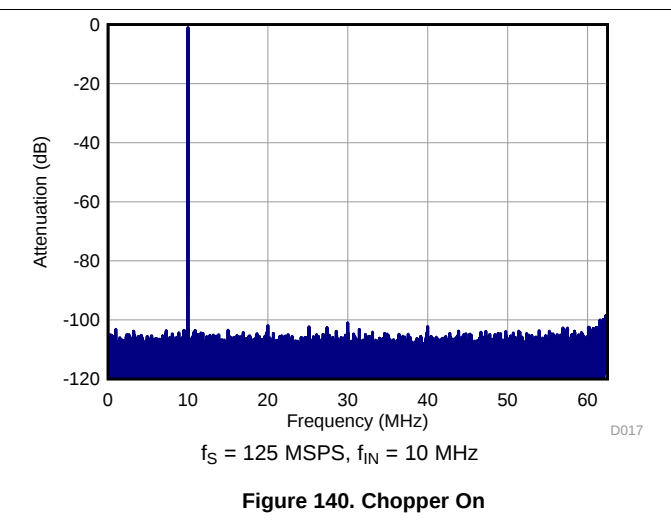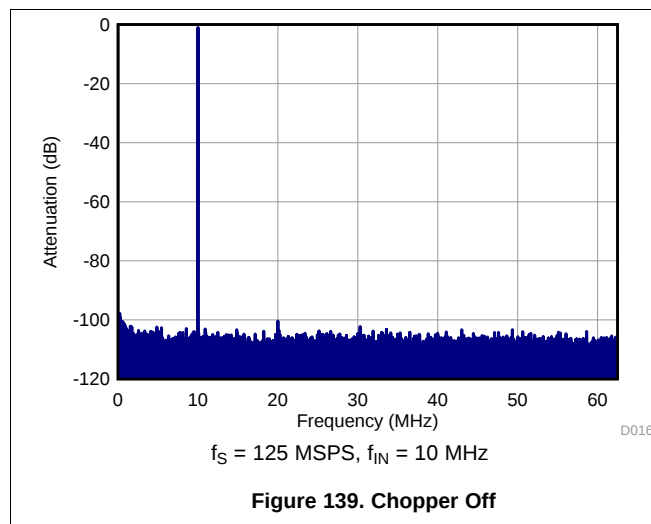

9.4.3 Power-Down Control

The power-down functions of the ADC322x can be controlled either through the parallel control pin (PDN) or through an SPI register setting (see [register 15h](#)). The PDN pin can also be configured via the SPI to a global power-down or standby functionality, as shown in [Table 4](#).

Table 4. Power-Down Modes

FUNCTION	POWER CONSUMPTION (mW)	WAKE-UP TIME (μ s)
Global power-down	5	85
Standby	81	35

9.4.3.1 Improving Wake-Up Time From Global Power-Down

The device has an internal low-pass filter in the sampling clock path. This low-pass filter helps improve the aperture jitter of the device. However, in applications where input frequencies are < 200 MHz, noise from the aperture jitter does not dominate the overall SNR of the device. In such applications, the wake-up time from a global power-down can be reduced by bypassing the low-pass filter using the DIS CLK FILT register bit (write 80h to register address 70Ah). As shown in Table 5, setting the DIS CLK FILT bit improves the wake-up time from a global power-down from 85 μ s to 55 μ s.

Table 5. Wake-Up Time From Global Power-Down

DIS CLK FILT REGISTER BIT	GLOBAL PDN REGISTER BIT	WAKE-UP TIME		
		TYP	MAX	UNIT
0	0→1→0	85	140	μ s
1	0→1→0	55	81	μ s

9.4.4 Internal Dither Algorithm

The ADC322x use an internal dither algorithm to achieve high SFDR and a clean spectrum. However, the dither algorithm marginally degrades SNR, creating a trade-off between SNR and SFDR. If desired, the dither algorithm can be turned off by using the DIS DITH CHx registers bits. Figure 141 and Figure 142 show the effect of using dither algorithms.

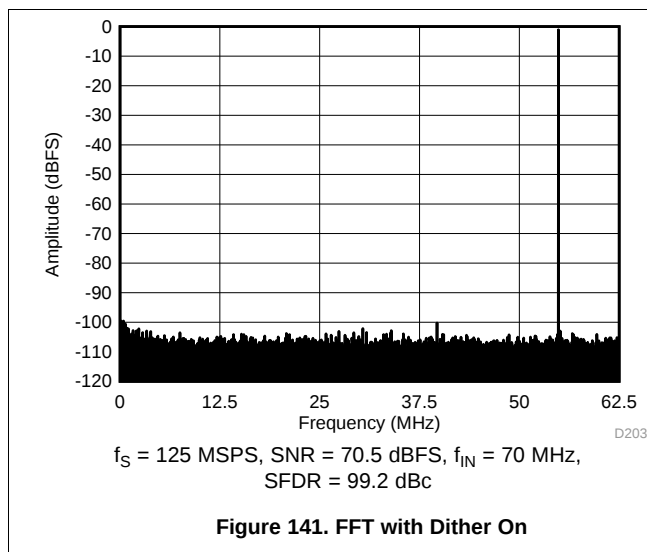


Figure 141. FFT with Dither On

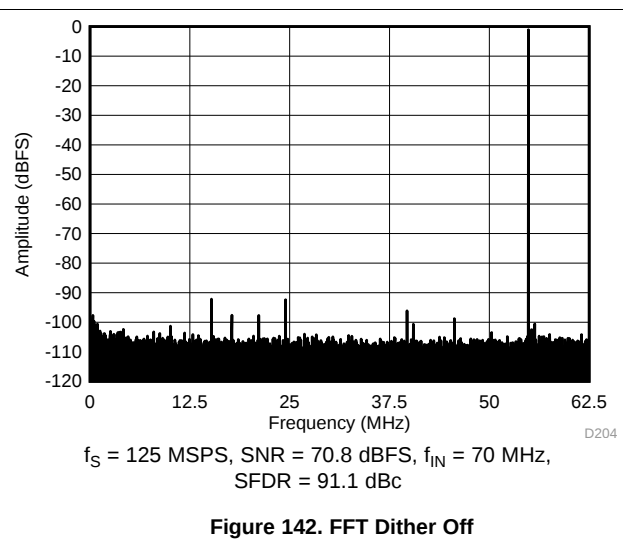


Figure 142. FFT Dither Off

9.5 Programming

The ADC322x can be configured using a serial programming interface, as described in this section.

9.5.1 Serial Interface

The device has a set of internal registers that can be accessed by the serial interface formed by the SEN (serial interface enable), SCLK (serial interface clock), SDATA (serial interface data), and SDOUT (serial interface data output) pins. Serially shifting bits into the device is enabled when SEN is low. Serial data SDATA are latched at every SCLK rising edge when SEN is active (low). The serial data are loaded into the register at every 24th SCLK rising edge when SEN is low. When the word length exceeds a multiple of 24 bits, the excess bits are ignored. Data can be loaded in multiples of 24-bit words within a single active SEN pulse. The interface can function with SCLK frequencies from 20 MHz down to very low speeds (of a few hertz) and also with a non-50% SCLK duty cycle.

Programming (continued)

9.5.1.1 Register Initialization

After power-up, the internal registers **must be** initialized to their default values through a hardware reset by applying a high pulse on the RESET pin (of durations greater than 10 ns), as shown in [Figure 143](#). If required, the serial interface registers can be cleared during operation either:

1. Through a hardware reset, or
2. By applying a software reset. When using the serial interface, set the RESET bit (D0 in register address 06h) high. This setting initializes the internal registers to the default values and then self-resets the RESET bit low. In this case, the RESET pin is kept low.

9.5.1.1.1 Serial Register Write

The device internal register can be programmed with these steps:

1. Drive the SEN pin low,
2. Set the R/W bit to 0 (bit A15 of the 16-bit address),
3. Set bit A14 in the address field to 1,
4. Initiate a serial interface cycle by specifying the address of the register (A13 to A0) whose content must be written, and
5. Write the 8-bit data that are latched in on the SCLK rising edge.

[Figure 143](#) and [Table 6](#) show the timing requirements for the serial register write operation.

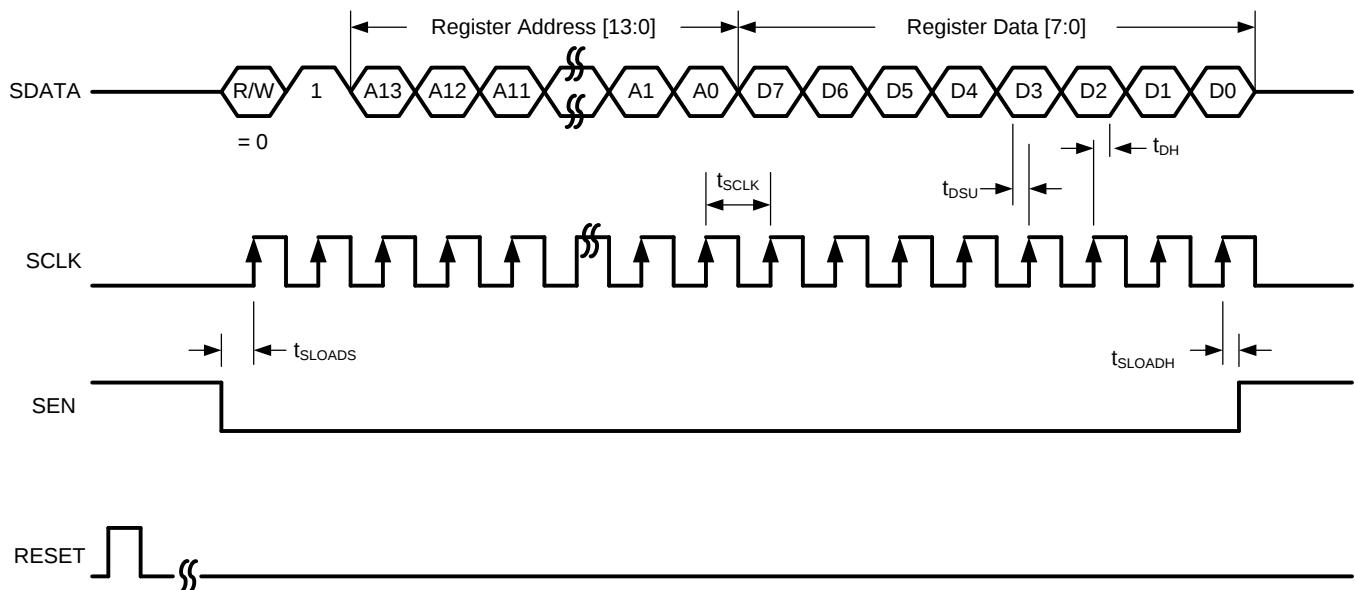


Figure 143. Serial Register Write Timing Diagram

Table 6. Serial Interface Timing⁽¹⁾

		MIN	TYP	MAX	UNIT
f_{SCLK}	SCLK frequency (equal to $1 / t_{SCLK}$)	> dc		20	MHz
t_{LOADS}	SEN to SCLK setup time	25			ns
t_{LOADH}	SCLK to SEN hold time	25			ns
t_{DSU}	SDIO setup time	25			ns
t_{DH}	SDIO hold time	25			ns

(1) Typical values are at 25°C, full temperature range is from $T_{MIN} = -40^{\circ}\text{C}$ to $T_{MAX} = 85^{\circ}\text{C}$, and $AVDD = DVDD = 1.8\text{ V}$, unless otherwise noted.

9.5.1.1.2 Serial Register Readout

The device includes a mode where the contents of the internal registers can be read back using the SDOUT pin. This readback mode can be useful as a diagnostic check to verify the serial interface communication between the external controller and the ADC. The procedure to read the contents of the serial registers is as follows:

1. Drive the SEN pin low.
2. Set the R/W bit (A15) to 1. This setting disables any further writes to the registers.
3. Set bit A14 in the address field to 1.
4. Initiate a serial interface cycle specifying the address of the register (A[13:0]) whose content must be read.
5. The device outputs the contents (D[7:0]) of the selected register on the SDOUT pin.
6. The external controller can latch the contents at the SCLK rising edge.
7. To enable register writes, reset the R/W register bit to 0.

When READOUT is disabled, the SDOUT pin is in a high-impedance mode. If serial readout is not used, the SDOUT pin must float. [Figure 144](#) shows a timing diagram of the serial register read operation. Data appear on the SDOUT pin at the SCLK falling edge with an approximate delay (t_{SD_DELAY}) of 20 ns, as shown in [Figure 145](#).

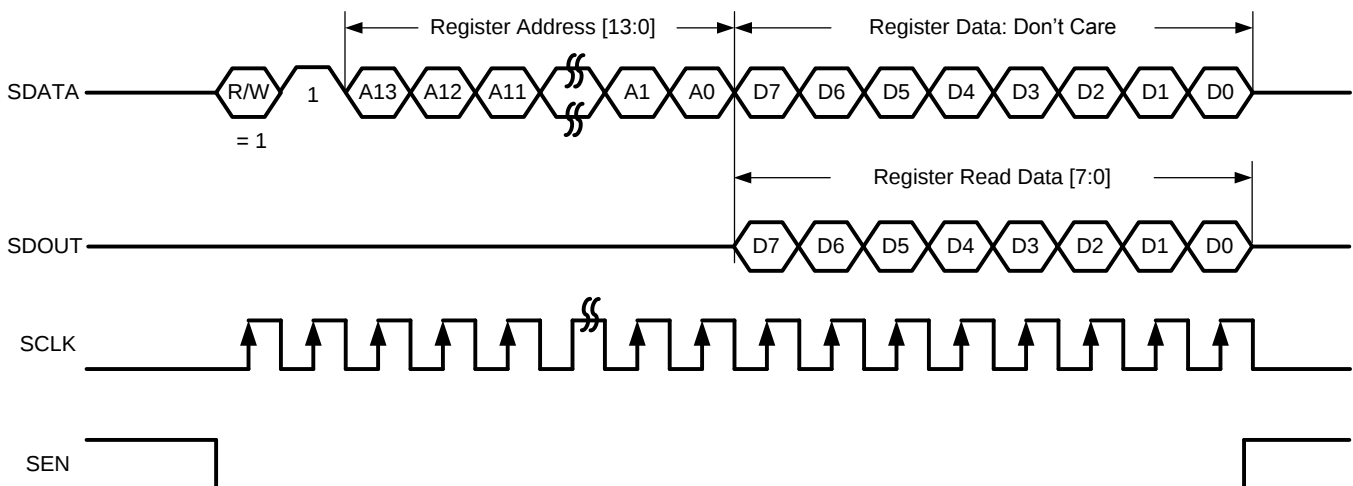


Figure 144. Serial Register Read Timing Diagram

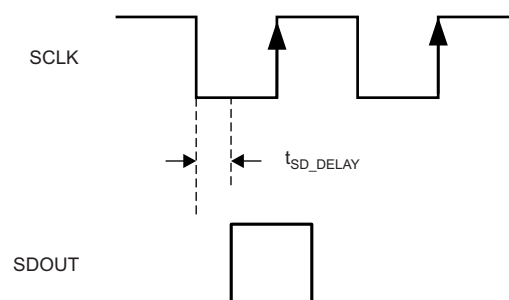


Figure 145. SDOUT Timing Diagram

9.5.2 Register Initialization

After power-up, the internal registers must be initialized to their default values through a hardware reset by applying a high pulse on the RESET pin, as shown in Figure 146 and Table 7.

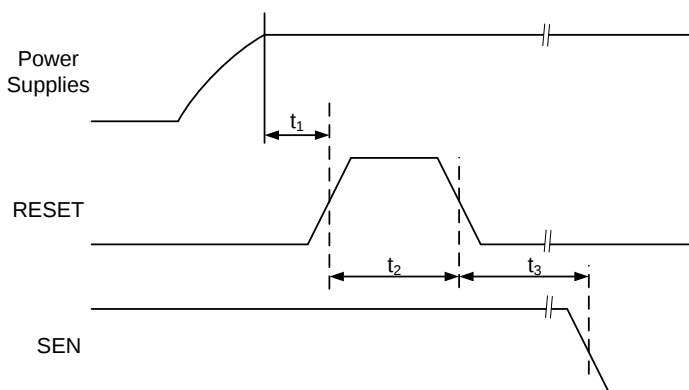


Figure 146. Initialization of Serial Registers after Power-Up

Table 7. Power-Up Timing

		MIN	TYP	MAX	UNIT
t ₁	Power-on delay: delay from power up to active high RESET pulse	1			ms
t ₂	Reset pulse width: active high RESET pulse width	10		1000	ns
t ₃	Register write delay: delay from RESET disable to SEN active	100			ns

If required, the serial interface registers can be cleared during operation either:

1. Through a hardware reset, or
2. By applying a software reset. When using the serial interface, set the RESET bit (D0 in register address 06h) high. This setting initializes the internal registers to the default values and then self-resets the RESET bit low. In this case, the RESET pin is kept low.

9.6 Register Maps

Table 8. Register Map Summary

REGISTER ADDRESS A[13:0] (Hex)	REGISTER DATA							
	7	6	5	4	3	2	1	0
Register 01h	0	0	DIS DITH CHA		DIS DITH CHB		0	0
Register 03h	0	0	0	0	0	0	0	ODD EVEN
Register 04h	0	0	0	0	0	0	0	FLIP WIRE
Register 05h	0	0	0	0	0	0	0	1W-2W
Register 06h	0	0	0	0	0	0	TEST PATTERN EN	RESET
Register 07h	0	0	0	0	0	0	0	OVR ON LSB
Register 09h	0	0	0	0	0	0	ALIGN TEST PATTERN	DATA FORMAT
Register 0Ah	0	0	0	0	CHA TEST PATTERN			
Register 0Bh	CHB TEST PATTERN			0	0	0	0	0
Register 0Eh	CUSTOM PATTERN[11:4]							
Register 0Fh	CUSTOM PATTERN[3:0]				0	0	0	0
Register 13h	0	0	0	0	0	0	LOW SPEED ENABLE	
Register 15h	0	CHA PDN	CHB PDN	0	STANDBY	GLOBAL PDN	0	CONFIG PDN PIN
Register 25h	LVDS SWING							
Register 27h	CLK DIV		0	0	0	0	0	0
Register 41Dh	0	0	0	0	0	0	HIGH IF MODE0	0
Register 422h	0	0	0	0	0	0	DIS CHOP CHA	0
Register 434h	0	0	DIS DITH CHA	0	DIS DITH CHA	0	0	0
Register 439h	0	0	0	0	SP1 CHA	0	0	0
Register 51Dh	0	0	0	0	0	0	HIGH IF MODE1	0
Register 522h	0	0	0	0	0	0	DIS CHOP CHB	0
Register 534h	0	0	DIS DITH CHB	0	DIS DITH CHB	0	0	0
Register 539h	0	0	0	0	SP1 CHB	0	0	0
Register 608h	HIGH IF MODE[3:2]		0	0	0	0	0	0
Register 70Ah	DIS CLK FILT	0	0	0	0	0	0	PDN SYSREF

9.6.1 Summary of Special Mode Registers

Table 9 lists the location, value, and functions of special mode registers in the device.

Table 9. Special Modes Summary

MODE	REGISTER SETTINGS	DESCRIPTION
Special modes	Registers 439h (bit 3) and 539h (bit 3)	Always set these bits high for best performance
Disable dither	Registers 1h (bits 5-2), 434h (bits 5 and 3), and 534h (bits 5 and 3)	Disable dither to improve SNR
Disable chopper	Registers 422h (bit 1) and 522h (bit 1)	Disable chopper to shift 1/f noise floor at dc
High IF modes	Registers 41Dh (bit 1), 51Dh (bit 1), and 608h (bits 7-6)	Improves HD3 for IF > 100 MHz

9.6.2 Serial Register Description

9.6.2.1 Register 01h

Figure 147. Register 01h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHA		DIS DITH CHB		0	0
W-0h	W-0h	R/W-0h		R/W-0h		W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 10. Register 01h Description

Bit	Field	Type	Reset	Description
7-6	0	W	0h	Must write 0
5-4	DIS DITH CHA	R/W	0h	These bits enable or disable the on-chip dither. Control this bit with bits 5 and 3 of register 434h. 00 = Default 11 = Dither is disabled for channel A. In this mode, SNR typically improves by 0.2 dB at 70 MHz.
3-2	DIS DITH CHB	R/W	0h	These bits enable or disable the on-chip dither. Control this bit with bits 5 and 3 of register 434h. 00 = Default 11 = Dither is disabled for channel B. In this mode, SNR typically improves by 0.2 dB at 70 MHz.
1-0	0	W	0h	Must write 0

9.6.2.2 Register 03h

Figure 148. Register 03h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	ODD EVEN
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 11. Register 03h Description

Bit	Field	Type	Reset	Description
7-1	0	W	0h	Must write 0
0	ODD EVEN	R/W	0h	This bit selects the bit sequence on the output wires (in 2-wire mode only). 0 = Bits 0, 1, and 2 appear on wire 0; bits 7, 8, and 9 appear on wire 1 1 = Bits 0, 2, and 4 appear on wire 0; bits 1, 3, and 5 appear on wire 1

9.6.2.3 Register 04h

Figure 149. Register 04h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	FLIP WIRE
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 12. Register 04h Description

Bit	Field	Type	Reset	Description
7-1	0	W	0h	Must write 0
0	FLIP WIRE	R/W	0h	This bit flips the data on the output wires. Valid only in two wire configuration. 0 = Default 1 = Data on output wires is flipped. Pin D0x becomes D1x, and vice versa.

9.6.2.4 Register 05h

Figure 150. Register 05h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	1W-2W
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 13. Register 05h Description

Bit	Field	Type	Reset	Description
7-1	0	W	0h	Must write 0
0	1W-2W	R/W	0h	This bit transmits output data on either one or two wires. 0 = Output data are transmitted on two wires (Dx0P, Dx0M and Dx1P, Dx1M) 1 = Output data are transmitted on one wire (Dx0P, Dx0M). In this mode, the recommended f_s is less than 62.5 MSPS.

9.6.2.5 Register 06h

Figure 151. Register 06h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	TEST PATTERN EN	RESET
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 14. Register 06h Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	TEST PATTERN EN	R/W	0h	This bit enables test pattern selection for the digital outputs. 0 = Normal output 1 = Test pattern output enabled
0	RESET	W	0h	This bit applies a software reset. This bit resets all internal registers to the default values and self-clears to 0.

9.6.2.6 Register 07h

Figure 152. Register 07h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	OVR ON LSB
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 15. Register 07h Description

Bit	Field	Type	Reset	Description
7-1	0	W	0h	Must write 0
0	OVR ON LSB	R/W	0h	This bit provides the overrange (OVR) information on the LSB bits. 0 = Output data bit 0 functions as the LSB of the 12-bit data 1 = Output data bit 0 carries the OVR information.

9.6.2.7 Register 09h

Figure 153. Register 09h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	ALIGN TEST PATTERN	DATA FORMAT
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 16. Register 09h Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	ALIGN TEST PATTERN	R/W	0h	This bit aligns the test patterns across the outputs of both channels. 0 = Test patterns of both channels are free running 1 = Test patterns of both channels are aligned
0	DATA FORMAT	R/W	0h	This bit programs the digital output data format. 0 = Twos complement 1 = Offset binary

9.6.2.8 Register 0Ah

Figure 154. Register 0Ah

7	6	5	4	3	2	1	0
0	0	0	0	CHA TEST PATTERN			
W-0h	W-0h	W-0h	W-0h	R/W-0h			

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 17. Register 0Ah Description

Bit	Field	Type	Reset	Description
7-4	0	W	0h	Must write 0
3-0	CHA TEST PATTERN	R/W	0h	These bits control the test pattern for channel A after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 101010101010 and 010101010101 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits 0110 = Deskew pattern: data are AAAh 1000 = PRBS pattern: data are a sequence of pseudo random numbers 1001 = 8-point sine-wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, and 599 Others = Do not use

9.6.2.9 Register 0Bh

Figure 155. Register 0Bh

7	6	5	4	3	2	1	0
CHB TEST PATTERN				0	0	0	0
R/W-0h				W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 18. Register 0Bh Description

Bit	Field	Type	Reset	Description
7-4	CHB TEST PATTERN	R/W	0h	These bits control the test pattern for channel B after the TEST PATTERN EN bit is set. 0000 = Normal operation 0001 = All 0's 0010 = All 1's 0011 = Toggle pattern: data alternate between 101010101010 and 010101010101 0100 = Digital ramp: data increment by 1 LSB every clock cycle from code 0 to 4095 0101 = Custom pattern: output data are the same as programmed by the CUSTOM PATTERN register bits 0110 = Deskew pattern: data are AAAh 1000 = PRBS pattern: data are a sequence of pseudo random numbers 1001 = 8-point sine-wave: data are a repetitive sequence of the following eight numbers that form a sine-wave: 0, 599, 2048, 3496, 4095, 3496, 2048, and 599 Others = Do not use
3-0	0	W	0h	Must write 0

9.6.2.10 Register 0Eh

Figure 156. Register 0Eh

7	6	5	4	3	2	1	0
CUSTOM PATTERN[11:4]							
R/W-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 19. Register 0Eh Description

Bit	Field	Type	Reset	Description
7-0	CUSTOM PATTERN[11:4]	R/W	0h	These bits set the 12-bit custom pattern (bits 11-4) for all channels.

9.6.2.11 Register 0Fh

Figure 157. Register 0Fh

7	6	5	4	3	2	1	0
CUSTOM PATTERN[3:0]				0	0	0	0
R/W-0h				W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 20. Register 0Fh Description

Bit	Field	Type	Reset	Description
7-4	CUSTOM PATTERN[3:0]	R/W	0h	These bits set the 12-bit custom pattern (bits 3-0) for all channels.
3-0	0	W	0h	Must write 0

9.6.2.12 Register 13h

Figure 158. Register 13h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	LOW SPEED ENABLE	
W-0h	R/W-0h	R/W-0h	W-0h	R/W-0h	R/W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 21. Register 13h Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1-0	LOW SPEED ENABLE	R/W	0h	Enables low speed operation in 1-wire and 2-wire mode. Depending upon sampling frequency, write this bit as per Table 22 .

Table 22. LOW SPEED ENABLE Register Bit Settings Across f_s

f_s (MSPS)		REGISTER BIT LOW SPEED ENABLE	
MIN	MAX	1-WIRE MODE	2-WIRE MODE
25	125	00	00
20	25	10	11
15	20	10	Not supported

9.6.2.13 Register 15h

Figure 159. Register 15h

7	6	5	4	3	2	1	0
0	CHA PDN	CHB PDN	0	STANDBY	GLOBAL PDN	0	CONFIG PDN PIN
W-0h	R/W-0h	R/W-0h	W-0h	R/W-0h	R/W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 23. Register 15h Description

Bit	Field	Type	Reset	Description
7	0	W	0h	Must write 0
6	CHA PDN	R/W	0h	0 = Normal operation 1 = Power-down channel A
5	CHB PDN	R/W	0h	0 = Normal operation 1 = Power-down channel B
4	0	W	0h	Must write 0
3	STANDBY	R/W	0h	The ADCs of both channels enter standby. 0 = Normal operation 1 = Standby
2	GLOBAL PDN	R/W	0h	0 = Normal operation 1 = Global power-down
1	0	W	0h	Must write 0
0	CONFIG PDN PIN	R/W	0h	This bit configures the PDN pin as either a global power-down or standby pin. 0 = Logic high voltage on the PDN pin sends the device into global power-down 1 = Logic high voltage on the PDN pin sends the device into standby

9.6.2.14 Register 25h

Figure 160. Register 25h

7	6	5	4	3	2	1	0
LVDS SWING							
R/W-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 24. Register 25h Description

Bit	Field	Type	Reset	Description
7-0	LVDS SWING	R/W	0h	These bits control the swing of the LVDS outputs (including the data output, bit clock, and frame clock). For details see Table 25 .

Table 25. LVDS Output Swing

BITS 7-4	BITS 3-0	LVDS OUTPUT SWING
0h	0h	Default (± 425 mV)
Dh	9h	Swing reduces by 50 mV
Eh	Ah	Swing reduces by 100 mV
Fh	Dh	Swing reduces by 300 mV
Ch	Eh	Swing increases by 100 mV
Others	Others	Do not use

9.6.2.15 Register 27h

Figure 161. Register 27h

7	6	5	4	3	2	1	0
CLK DIV	0	0	0	0	0	0	0
R/W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 26. Register 27h Description

Bit	Field	Type	Reset	Description
7-6	CLK DIV	R/W	0h	These bits set the internal clock divider for the input sampling clock. 00 = Divide-by-1 01 = Divide-by-1 10 = Divide-by-2 11 = Divide-by-4
5-0	0	W	0h	Must write 0

9.6.2.16 Register 41Dh

Figure 162. Register 41Dh

7	6	5	4	3	2	1	0
0	0	0	0	0	0	HIGH IF MODE0	0
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 27. Register 41Dh Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	HIGH IF MODE0	R/W	0h	This bit improves HD3 for IF > 100 MHz. 0 = Normal operation For best HD3 at IF > 100 MHz, set HIGH IF MODE[3:0] to 1111.
0	0	W	0h	Must write 0

9.6.2.17 Register 422h

Figure 163. Register 422h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	DIS CHOP CHA	0
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 28. Register 422h Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	DIS CHOP CHA	R/W	0h	Disable chopper. Set this bit to shift a 1/f noise floor at dc. 0 = 1/f noise floor is centered at $f_s / 2$ (default) 1 = Chopper mechanism is disabled; 1/f noise floor is centered at dc
0	0	W	0h	Must write 0

9.6.2.18 Register 434h

Figure 164. Register 434h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHA	0	DIS DITH CHA	0	0	0
W-0h	W-0h	R/W-0h	W-0h	R/W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 29. Register 434h Description

Bit	Field	Type	Reset	Description
7-6	0	W	0h	Must write 0
5	DIS DITH CHA	R/W	0h	Set this bit with bits 5 and 4 of register 01h. 00 = Default 11 = Dither is disabled for channel A. In this mode, SNR typically improves by 0.5 dB at 70 MHz.
4	0	W	0h	Must write 0
3	DIS DITH CHA	R/W	0h	Set this bit with bits 5 and 4 of register 01h. 00 = Default 11 = Dither is disabled for channel A. In this mode, SNR typically improves by 0.5 dB at 70 MHz.
2-0	0	W	0h	Must write 0

9.6.2.19 Register 439h

Figure 165. Register 439h

7	6	5	4	3	2	1	0
0	0	0	0	SP1 CHA	0	0	0
W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 30. Register 439h Description

Bit	Field	Type	Reset	Description
7-4	0	W	0h	Must write 0
3	SP1 CHA	R/W	0h	Special mode for best performance on channel A. Always write 1 after reset.
2-0	0	W	0h	Must write 0

9.6.2.20 Register 51Dh

Figure 166. Register 51Dh

7	6	5	4	3	2	1	0
0	0	0	0	0	0	HIGH IF MODE1	0
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 31. Register 51Dh Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	HIGH IF MODE1	R/W	0h	This bit improves HD3 for IF > 100 MHz. 0 = Normal operation For best HD3 at IF > 100 MHz, set HIGH IF MODE[3:0] to 1111.
0	0	W	0h	Must write 0

9.6.2.21 Register 522h

Figure 167. Register 522h

7	6	5	4	3	2	1	0
0	0	0	0	0	0	DIS CHOP CHB	0
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 32. Register 522h Description

Bit	Field	Type	Reset	Description
7-2	0	W	0h	Must write 0
1	DIS CHOP CHB	R/W	0h	Disable chopper. Set this bit to shift a 1/f noise floor at dc. 0 = 1/f noise floor is centered at $f_s / 2$ (default) 1 = Chopper mechanism is disabled; 1/f noise floor is centered at dc
0	0	W	0h	Must write 0

9.6.2.22 Register 534h

Figure 168. Register 534h

7	6	5	4	3	2	1	0
0	0	DIS DITH CHA	0	DIS DITH CHA	0	0	0
W-0h	W-0h	R/W-0h	W-0h	R/W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 33. Register 534h Description

Bit	Field	Type	Reset	Description
7-6	0	W	0h	Must write 0
5	DIS DITH CHA	R/W	0h	Set this bit with bits 3 and 2 of register 01h. 00 = Default 11 = Dither is disabled for channel B. In this mode, SNR typically improves by 0.5 dB at 70 MHz.
4	0	W	0h	Must write 0
3	DIS DITH CHA	R/W	0h	Set this bit with bits 3 and 2 of register 01h. 00 = Default 11 = Dither is disabled for channel B. In this mode, SNR typically improves by 0.5 dB at 70 MHz.
2-0	0	W	0h	Must write 0

9.6.2.23 Register 539h

Figure 169. Register 539h

7	6	5	4	3	2	1	0
0	0	0	0	SP1 CHB	0	0	0
W-0h	W-0h	W-0h	W-0h	R/W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 34. Register 539h Description

Bit	Field	Type	Reset	Description
7-4	0	W	0h	Must write 0
3	SP1 CHB	R/W	0h	Special mode for best performance on channel B. Always write 1 after reset.
0	0	W	0h	Must write 0

9.6.2.24 Register 608h

Figure 170. Register 608h

7	6	5	4	3	2	1	0
HIGH IF MODE[3:2]	0	0	0	0	0	0	0
R/W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 35. Register 608h Description

Bit	Field	Type	Reset	Description
7-6	HIGH IF MODE[3:2]	R/W	0h	This bit improves HD3 for IF > 100 MHz. 0 = Normal operation For best HD3 at IF > 100 MHz, set HIGH IF MODE[3:0] to 1111.
5-0	0	W	0h	Must write 0

9.6.2.25 Register 70Ah

Figure 171. Register 70Ah

7	6	5	4	3	2	1	0
DIS CLK FILT	0	0	0	0	0	0	PDN SYSREF
R/W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W = Write only; -n = value after reset

Table 36. Register 70Ah Description

Bit	Field	Type	Reset	Description
7	DIS CLK FILT	R/W	0h	Set this bit to improve wake-up time from global power-down mode; see the Improving Wake-Up Time From Global Power-Down section for details.
6-1	0	W	0h	Must write 0
0	PDN SYSREF	R/W	0h	If the SYSREF pins are not used in the system, the SYSREF buffer must be powered down by setting this bit. 0 = Normal operation 1 = Powers down the SYSREF buffer



10 Applications and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

Typical applications involving transformer-coupled circuits are discussed in this section. Transformers (such as ADT1-1WT or WBC1-1) can be used up to 250 MHz to achieve good phase and amplitude balances at the ADC inputs. When designing the dc-driving circuits, the ADC input impedance must be considered. Figure 172 and Figure 173 show the impedance ($Z_{in} = R_{in} \parallel C_{in}$) across the ADC input pins.

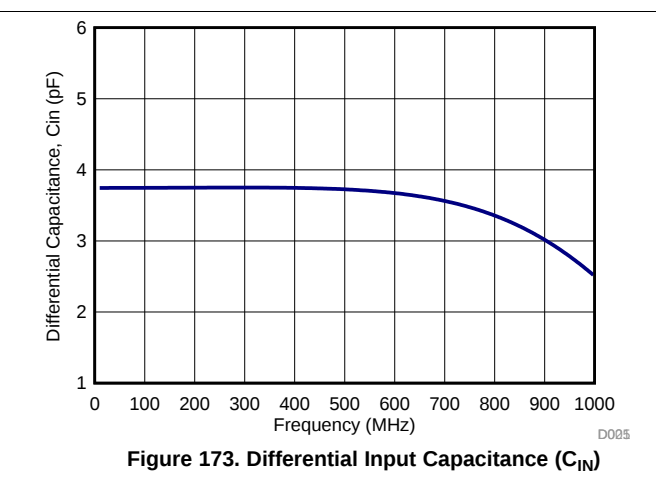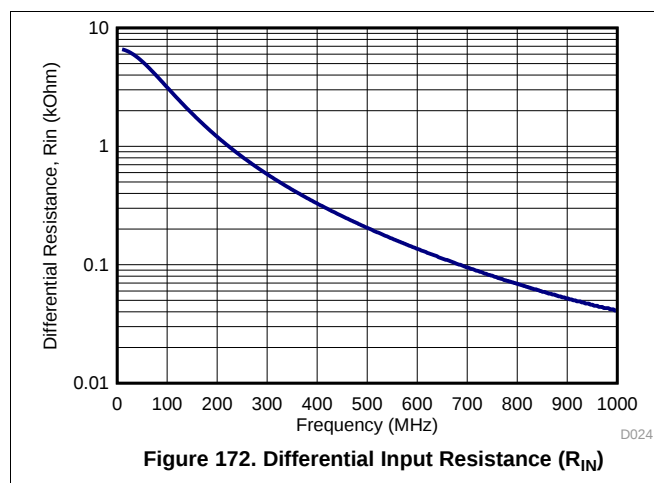

10.2 Typical Applications

10.2.1 Driving Circuit Design: Low Input Frequencies

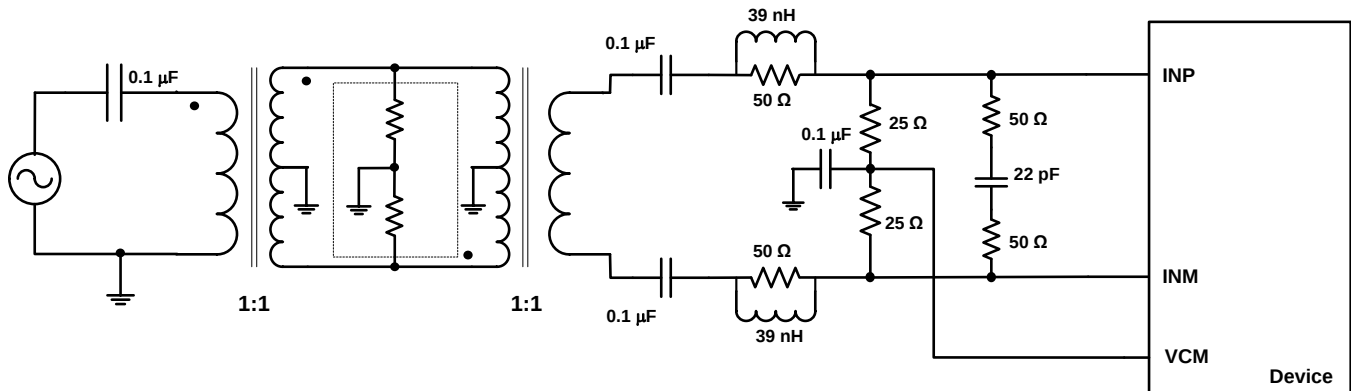


Figure 174. Driving Circuit for Low Input Frequencies

10.2.1.1 Design Requirements


For optimum performance, the analog inputs must be driven differentially. An optional 5-Ω to 15-Ω resistor in series with each input pin can be kept to damp out ringing caused by package parasitic. The drive circuit may have to be designed to minimize the affect of kick-back noise generated by sampling switches opening and closing inside the ADC, as well as ensuring low insertion loss over the desired frequency range and matched impedance to the source.

10.2.1.2 Detailed Design Procedure

A typical application involving using two back-to-back coupled transformers is shown in [Figure 174](#). This circuit is optimized for low input frequencies. An external R-C-R filter using 50-Ω resistors and a 22-pF capacitor is used with the series inductor (39 nH); this combination helps absorb the sampling glitches.

10.2.1.3 Application Curve

[Figure 175](#) shows the performance obtained by using the circuit shown in [Figure 174](#).

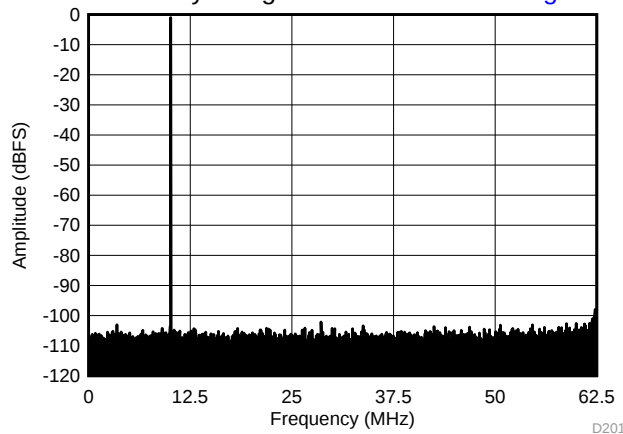

$f_s = 125$ MSPS, SNR = 70.6 dBFS, $f_{IN} = 10$ MHz, SFDR = 101.1 dBc

Figure 175. Performance FFT at 10 MHz (Low Input Frequency)

Typical Applications (continued)

10.2.2 Driving Circuit Design: Input Frequencies Between 100 MHz to 230 MHz

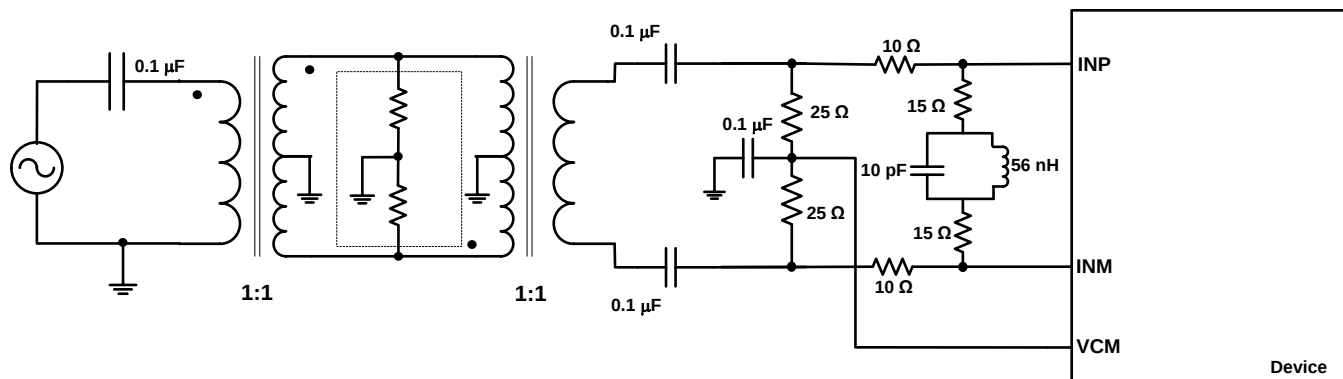


Figure 176. Driving Circuit for Mid-Range Input Frequencies ($100 \text{ MHz} < f_{\text{IN}} < 230 \text{ MHz}$)

10.2.2.1 Design Requirements


See the [Design Requirements](#) section for further details.

10.2.2.2 Detailed Design Procedure

When input frequencies are between 100 MHz to 230 MHz, an R-LC-R circuit can be used to optimize performance, as shown in [Figure 176](#).

10.2.2.3 Application Curve

[Figure 177](#) shows the performance obtained by using the circuit shown in [Figure 176](#).

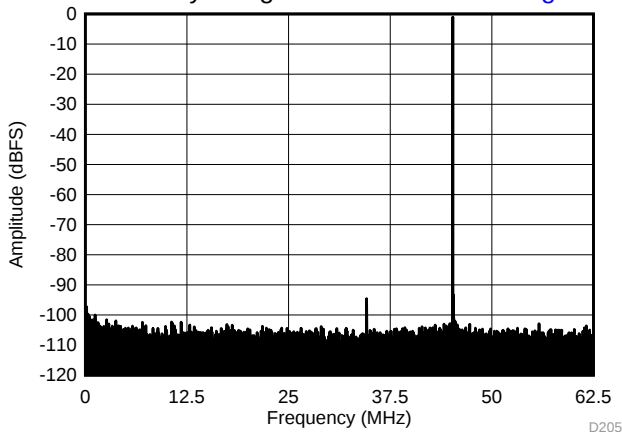

$f_{\text{S}} = 125 \text{ MSPS}$, $\text{SNR} = 70 \text{ dBFS}$, $f_{\text{IN}} = 170 \text{ MHz}$, $\text{SFDR} = 93.6 \text{ dBc}$

Figure 177. Performance FFT at 170 MHz (Mid Input Frequency)

Typical Applications (continued)

10.2.3 Driving Circuit Design: Input Frequencies Greater than 230 MHz

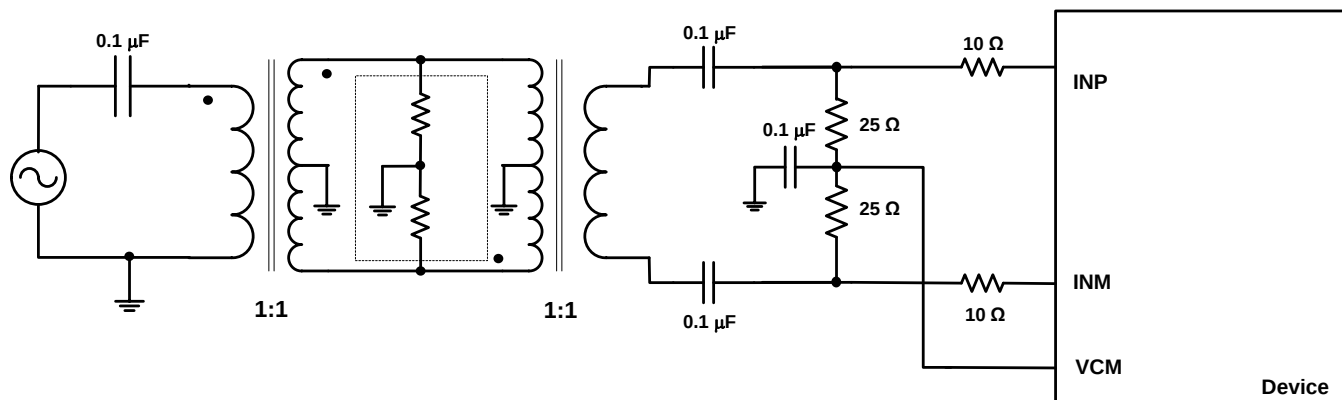


Figure 178. Driving Circuit for High Input Frequencies ($f_{IN} > 230$ MHz)

10.2.3.1 Design Requirements


See the [Design Requirements](#) section for further details.

10.2.3.2 Detailed Design Procedure

For high input frequencies (> 230 MHz), using the R-C-R or R-LC-R circuit does not show significant improvement in performance. However, a series resistance of $10\ \Omega$ can be used as shown in [Figure 178](#).

10.2.3.3 Application Curve

[Figure 179](#) shows the performance obtained by using the circuit shown in [Figure 178](#).

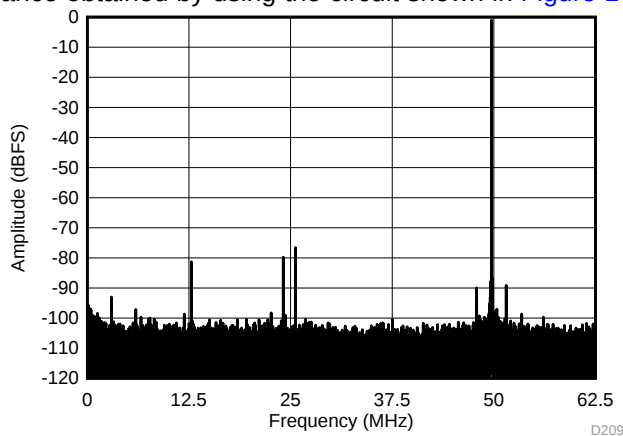

$f_S = 125$ MSPS, SNR = 67.4 dBFS, $f_{IN} = 450$ MHz, SFDR = 75.5 dBc

Figure 179. Performance FFT at 450 MHz (High Input Frequency)

11 Power-Supply Recommendations

The device requires a 1.8-V nominal supply for AVDD and DVDD. There are no specific sequence power-supply requirements during device power-up. AVDD and DVDD can power up in any order.

12 Layout

12.1 Layout Guidelines

The ADC322x EVM layout can be used as a reference layout to obtain the best performance. A layout diagram of the EVM top layer is provided in [Figure 180](#). Some important points to remember during laying out the board are:

1. Analog inputs are located on opposite sides of the device pin out to ensure minimum crosstalk on the package level. To minimize crosstalk onboard, the analog inputs must exit the pin out in opposite directions, as shown in the reference layout of [Figure 180](#) as much as possible.
2. In the device pin out, the sampling clock is located on a side perpendicular to the analog inputs in order to minimize coupling between them. This configuration is also maintained on the reference layout of [Figure 180](#) as much as possible.
3. Keep digital outputs away from analog inputs. When these digital outputs exit the pin out, the digital output traces must not be kept parallel to the analog input traces because this configuration can result in coupling from digital outputs to analog inputs and degrade performance. All digital output traces to the receiver (such as an FPGA or an ASIC) must be matched in length to avoid skew among outputs.
4. At each power-supply pin (AVDD and DVDD), a 0.1- μ F decoupling capacitor must be kept close to the device. A separate decoupling capacitor group consisting of a parallel combination of 10- μ F, 1- μ F, and 0.1- μ F capacitors can be kept close to the supply source.

12.2 Layout Example

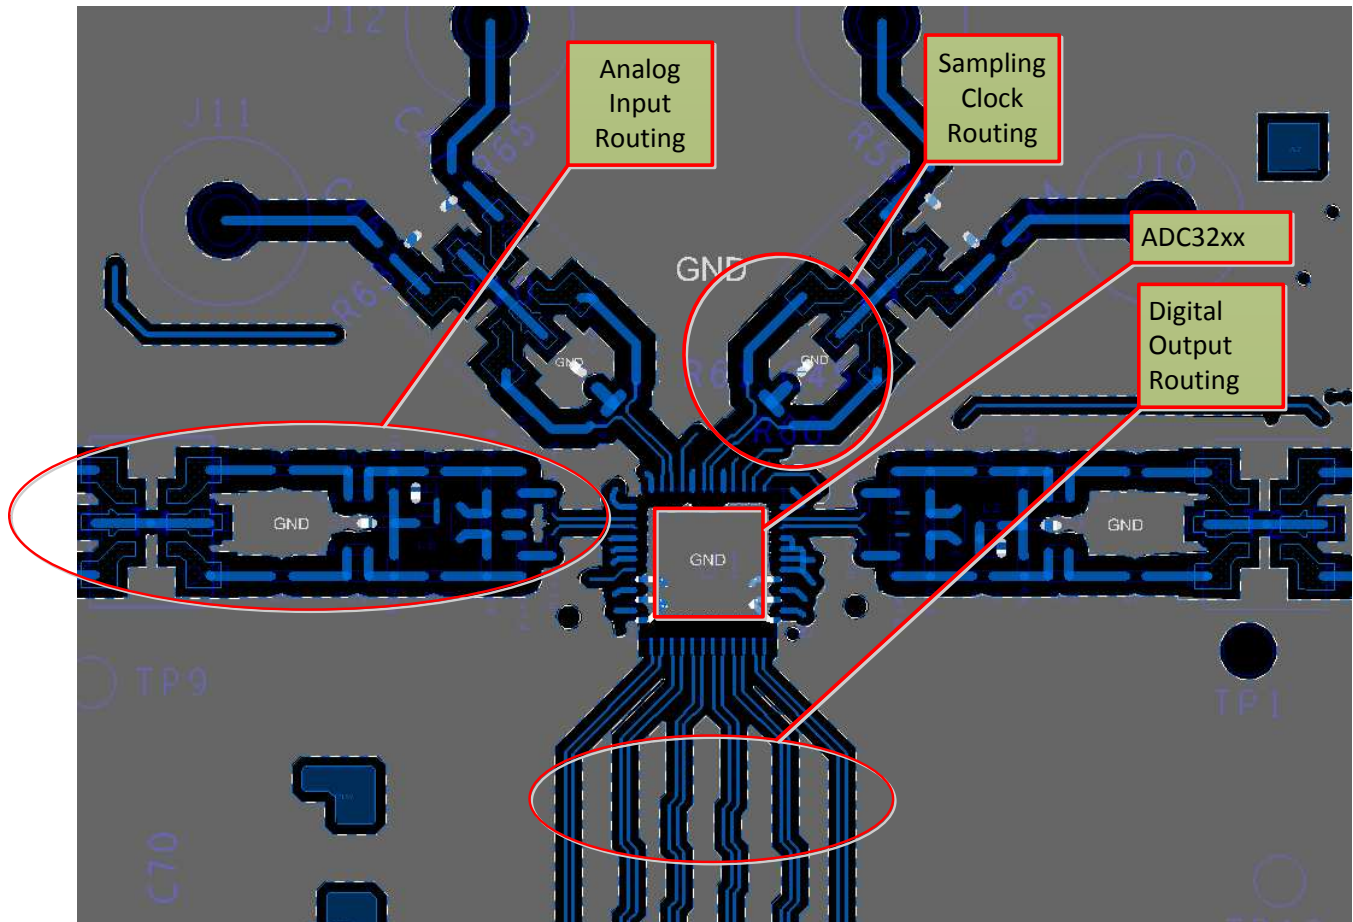


Figure 180. Typical Layout of the ADC322x Board

13 器件和文档支持

13.1 相关链接

下面的表格列出了快速访问链接。范围包括技术文档、支持和社区资源、工具和软件，以及样片或购买的快速访问。

表 37. 相关链接

器件	产品文件夹	样片与购买	技术文档	工具与软件	支持与社区
ADC3221	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC3222	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC3223	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
ADC3224	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处

13.2 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

13.3 商标

E2E is a trademark of Texas Instruments.

PowerPAD is a trademark of Texas Instruments, Inc.

All other trademarks are the property of their respective owners.

13.4 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

13.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
ADC3221IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3221	Samples
ADC3221IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3221	Samples
ADC3222IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3222	Samples
ADC3222IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3222	Samples
ADC3223IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3223	Samples
ADC3223IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3223	Samples
ADC3224IRGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3224	Samples
ADC3224IRGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	AZ3224	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

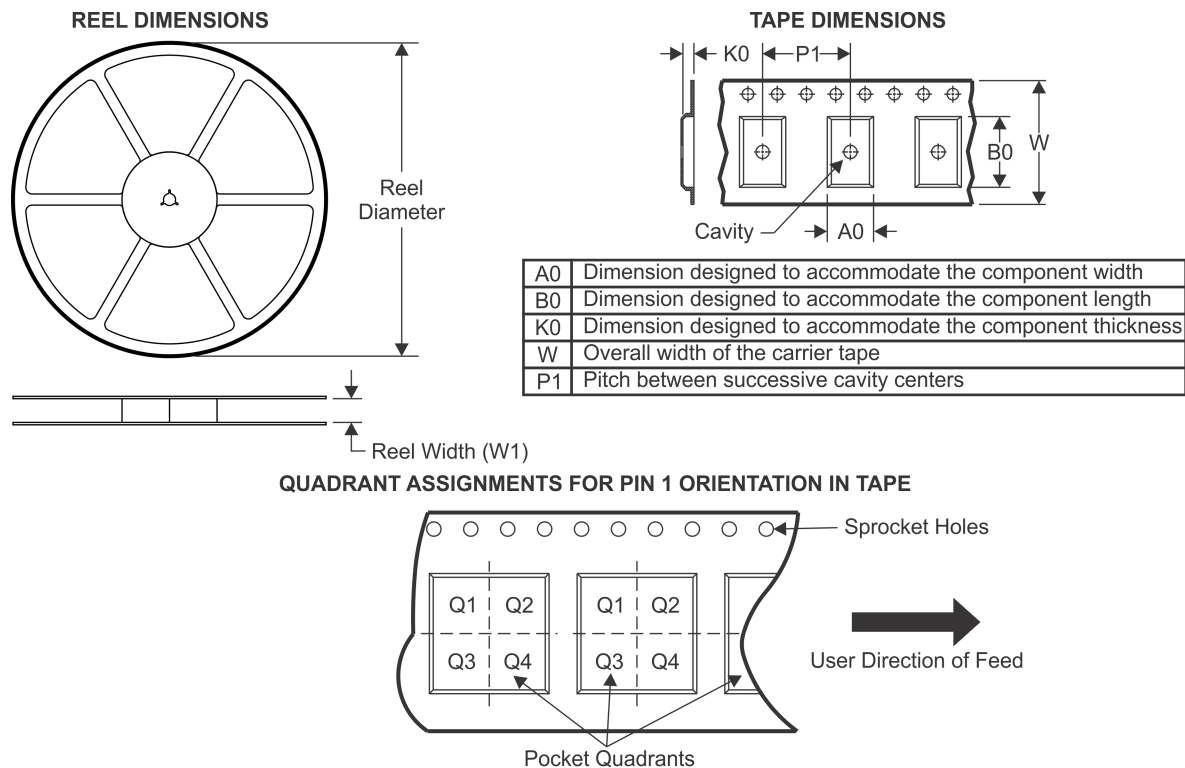TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ADC3221IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3221IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3222IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3222IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3223IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3223IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3224IRGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2
ADC3224IRGZT	VQFN	RGZ	48	250	180.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS

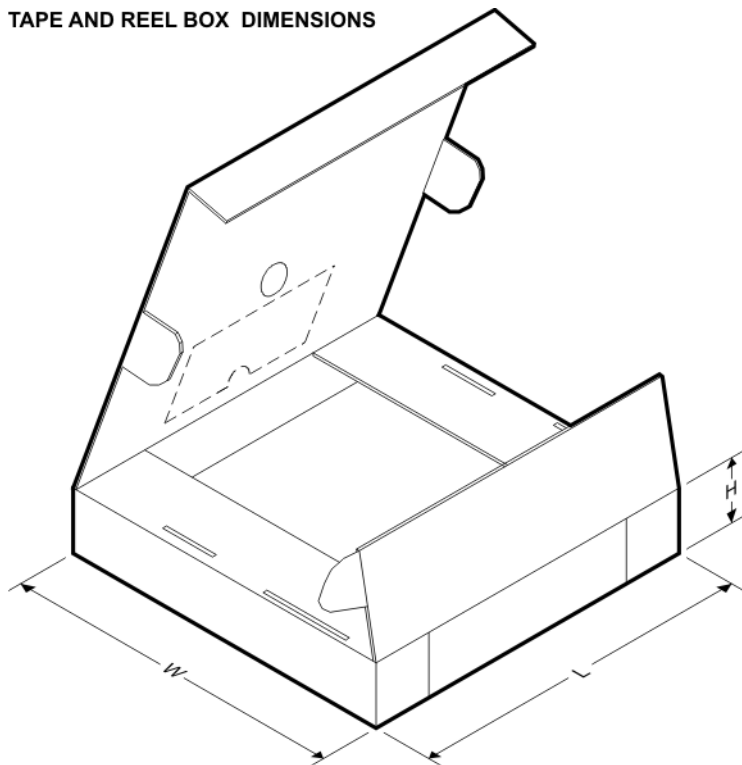

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ADC3221IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC3221IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC3222IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC3222IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC3223IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC3223IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0
ADC3224IRGZR	VQFN	RGZ	48	2500	350.0	350.0	43.0
ADC3224IRGZT	VQFN	RGZ	48	250	213.0	191.0	55.0


GENERIC PACKAGE VIEW

RGZ 48

VQFN - 1 mm max height

7 x 7, 0.5 mm pitch

PLASTIC QUADFLAT PACK- NO LEAD

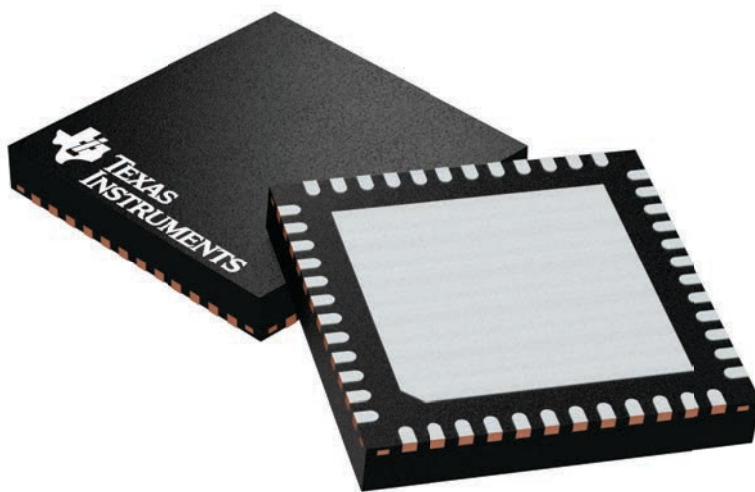

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4224671/A



VQFN - 1 mm max height

44X 0.5

12

2X 5.5

13

24

25

EXPOSED THERMAL PAD

49

SYMM

SEE TERMINAL DETAIL

1

48

37

36

48X 0.5
0.3

48X 0.30
0.18

⊕	0.1(M)	C	A	B
	0.05(M)			


(0.2) TYP

EXAMPLE BOARD LAYOUT


RGZ0048D

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

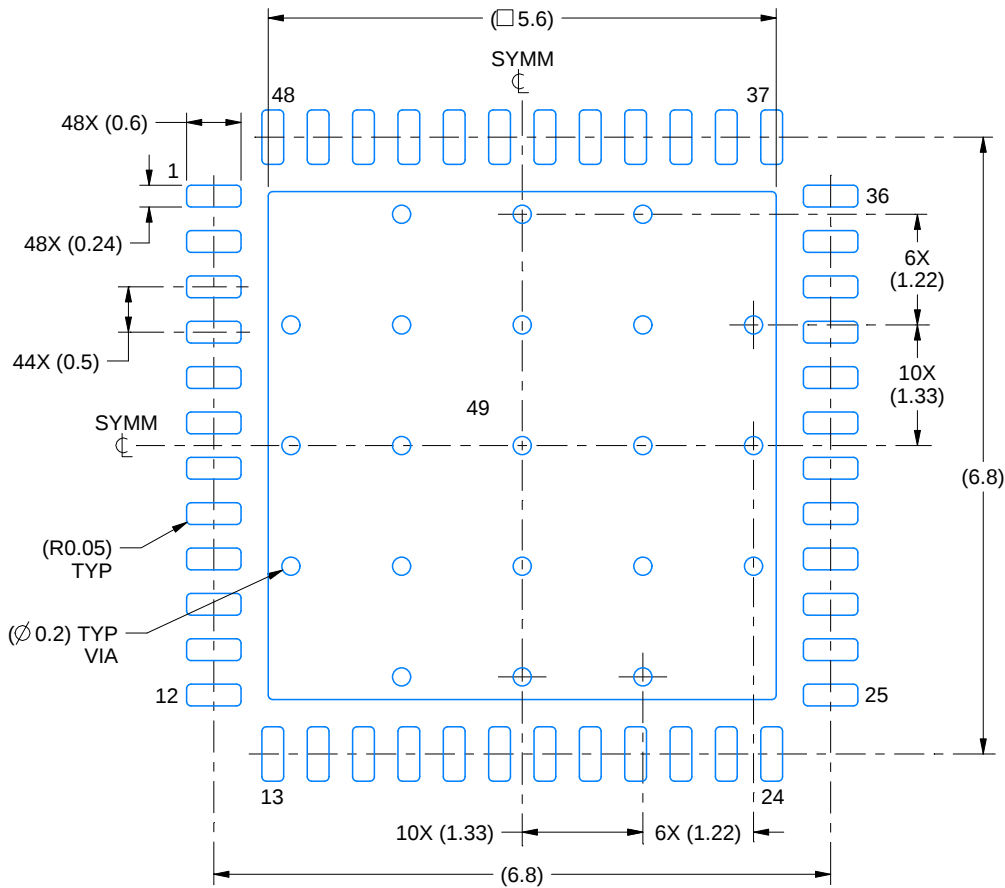

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:12X

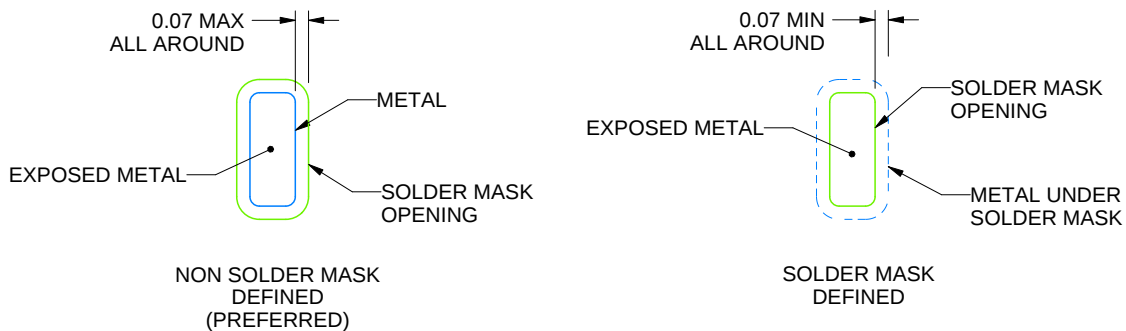

SOLDER MASK DETAILS

4219046/A 08/2017

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGZ0048D

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

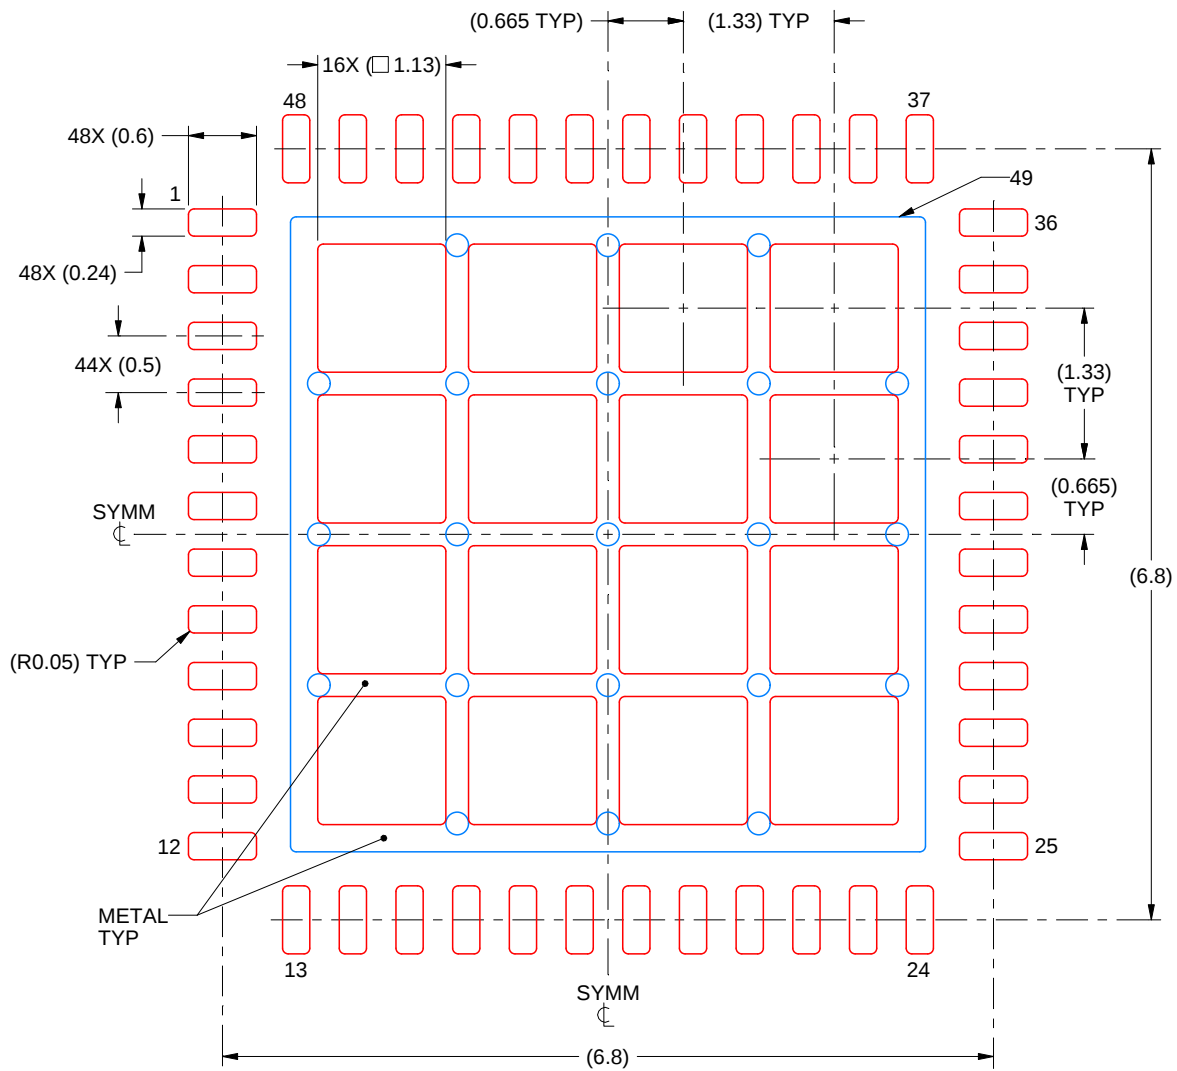

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 49
66% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:15X

4219046/A 08/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司