

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES:  
MTVA0X00N0XW3S

SHEET 1 OF 3  
Dwg 1008165


EN 16-0736  
Revision AF

## FEATURES

Temperature Variable  
Compact Package  
Wideband Performance  
Passive Gain Compensation  
Rugged Construction  
MIL-PRF-3933

## APPLICATIONS

Power Amplifiers  
Instrumentation  
Mobile Networks  
Point-to-Point Radios  
Satellite Communications  
Military Radios  
Up/Down Converters



## GENERAL DESCRIPTION

EMC Technology is the leading authority in temperature variable attenuators. Thermopad® temperature variable attenuators have been a highly reliable passive solution for over temperature gain compensation for more than 20 years. All Thermopad® products can be qualified for high-reliability and space applications.

## ORDERING INFORMATION

Part Identifier: MTVA0X00N0XW3S

X-Temperature Coefficient of Attenuation  $1 \times 10^{-3}$  dB/dB/°C  
N-Attenuation Shift Negative  
X-dB Value

## SPECIFICATIONS

### 1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC-12.4 GHz
Attenuation Values Available:	1-9 dB in 1 dB increments
Attenuation Accuracy:	@ 25°C: $\pm 0.5$ dB @ 1 GHz
VSWR:	1.30:1 Max @ 1 GHz
Input Power:	200 milliwatts cw. Full Rated Power to 125°C, Derated Linearly to 0 Watts @ 150°C
Temperature Coefficient of Attenuation:	-0.003,-0.004,-0.005,-0.006,-0.007, and -0.009 dB/dB/°C
Temperature Coefficient Tolerance:	$\pm 0.001$ dB/dB/°C

### 2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +150°C

### 3.0 MARKING

Unit Marking: dB value (X), direction of shift (N) and TCA shift (X).

### 4.0 QUALITY ASSURANCE

Sample Inspect Per ANSI/ASQC Z1.4 General Inspection, Level II, AQL=1.0.

Visual and Mechanical Examination for Conformance to Outline Drawing Requirements

Sample Inspection (Destructive Testing).

Select three (3) units from lot and measure DCA every 20°C over the temperature range of -55°C to +125°C; Calculate using linear regression, the slope of the curve.

Calculate TCA using the following formula:

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES:  
MTVA0X00N0XW3S

SHEET 2 OF 3  
Dwg 1008165

EN 16-0736  
Revision AF

$$TCA = \frac{\text{Slope}}{\text{Attenuation @ 25}^\circ\text{C}}$$

Inspection in accordance with 824W107

Test Data Requirements:

No Data Required for Customer


Data Retention – 24 Months

## 5.0 PACKAGING

Standard: Tape & Reel

## 6.0 MECHANICAL

Substrate Material: Alumina, 96% MIL-I-10  
Terminal Material: Thick Film, Nickel Barrier, Solder Coated  
Workmanship: Per MIL-PRF-55342  
Resistive Element: Thick Film  
Metric Dimensions: Provided for reference only

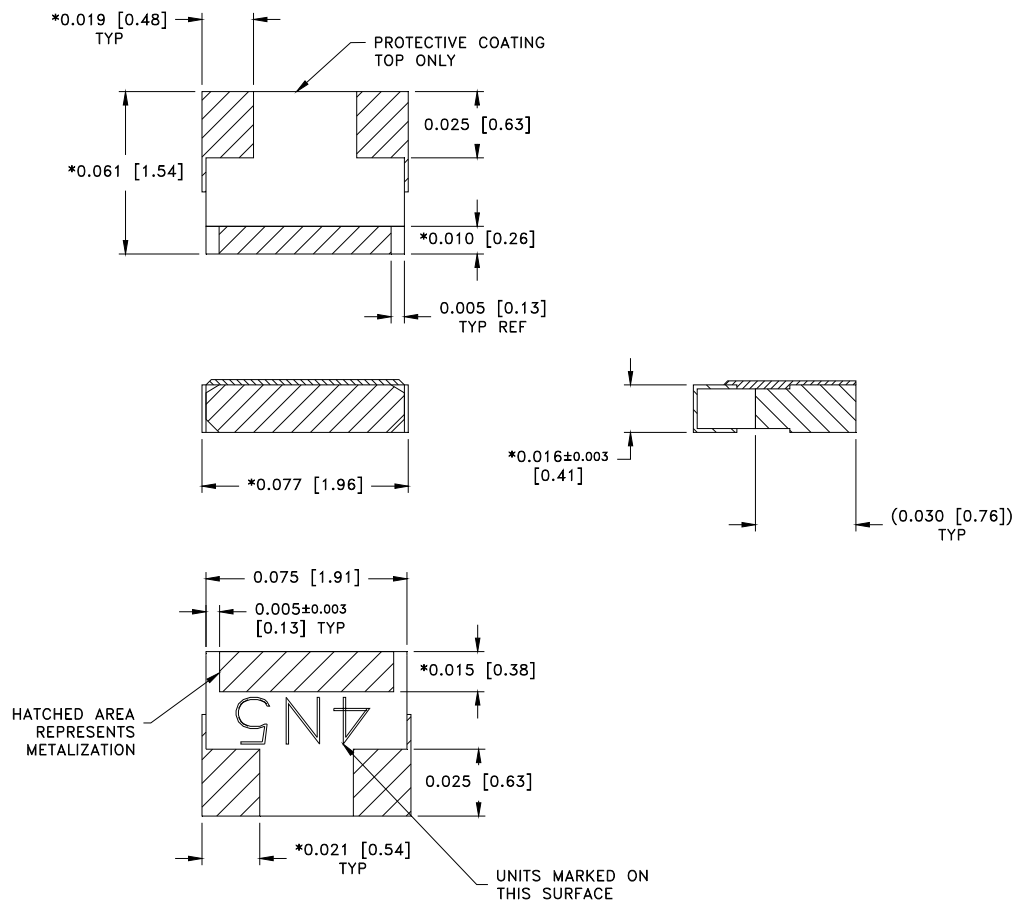

Unless Otherwise Specified: TOLERANCE: X.XXX = ± 0.005

DIMENSIONS APPLY BEFORE SOLDER ALLOW 0.015 MAX FOR PRETINNED SURFACES

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES:  
MTVA0X00N0XW3S

SHEET 3 OF 3  
Dwg 1008165

EN 16-0736  
Revision AF

## 7.0 FOOTPRINT

Part Number	Inches						mm					
	A	B	C	D	S	W	A	B	C	D	S	W
MTVA0X00N0XW3S	0.022	0.028	0.041	0.013	0.026	0.075	0.56	0.71	1.04	0.33	0.66	1.91

