


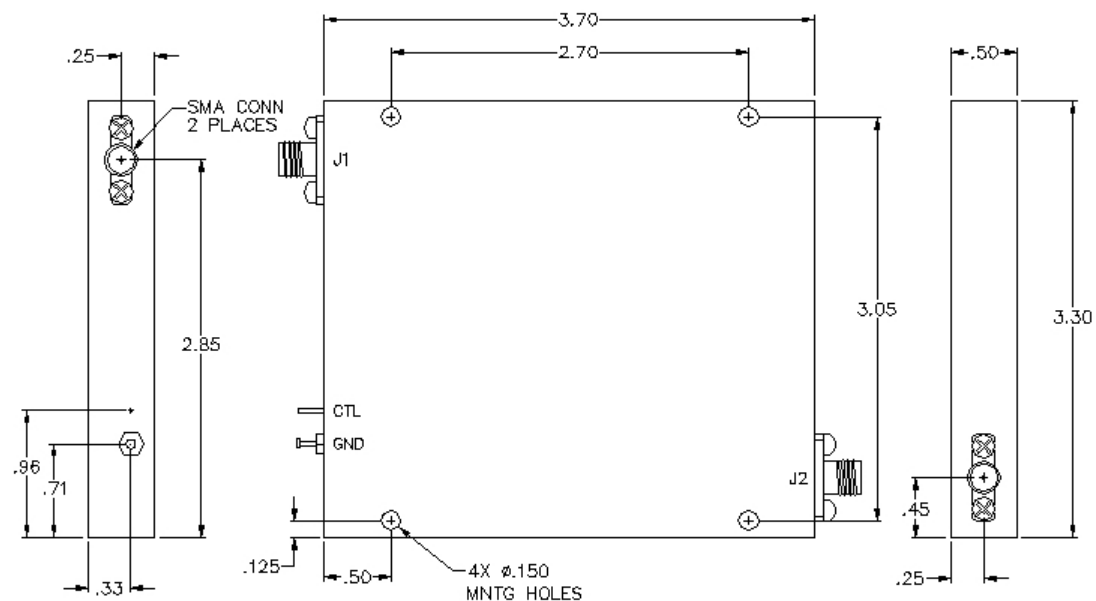

SPECIFICATIONS

Frequency Range:	0.25 - 0.5 GHz
Insertion Loss:	2.5 dB Max
VSWR:	1.50:1 Max
Attenuation Range:	32 dB
Control Voltage:	0 to +8 Volts Typical
Operating Power:	≤ 0 dBm
Power Handling:	+ 27 dBm Max
Operating Temperature:	-25°C to +80°C

Notes:

Harmonic distortion is affected by input power and frequency.
 Typical distortion is 50 dBc for input power less than 0.0 dBm.
 Two tone intermodulation products are typically 54 dBc for input power less than 0.0 dBm.

These attenuators are bi-directional.
 Either J1 or J2 can be used as input.

Attenuator Accuracy vs. Frequency

Bandwidth (2:1)		Bandwidth (4:1)	
Flatness (dB)	Attenuation (dB)	Flatness (dB)	Attenuation (dB)
± 0.5	0 - 10	± 0.6	0 - 10
± 0.8	0 - 20	± 1.2	0 - 20
± 1.2	0 - 30	± 1.8	0 - 30
± 1.5	0 - 40	± 2.2	0 - 40
± 2.2	0 - 64	± 3.5	0 - 64

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
 48 INDUSTRIAL WEST, CLIFTON NJ 07012
 TEL: 973-779-6262 FAX: 973-779-2727
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Voltage Controlled Attenuator

MODEL NO. :

AAT-10-479/1S

DIMENSIONS ARE IN INCHES
 DECIMAL TOLERANCE:
 2 PLACE $\pm .02$
 3 PLACE $\pm .010$

SIZE
A

CAGE CODE :
0HR85

REV CODE :

170201

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
 CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1