

3 Way-0° 50Ω 1 to 300 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections


SUM PORT	6
PORT 1	1
PORT 2	2
PORT 3	5
GROUND	3,4,7,8

Outline Drawing

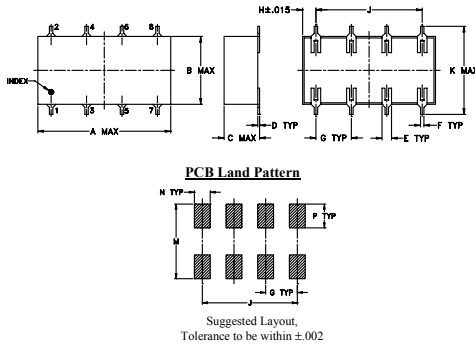

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

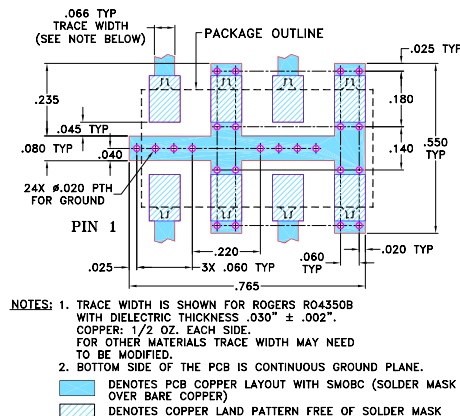Demo Board MCL P/N: TB-51
Suggested PCB Layout (PL-062)

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- good isolation, 25 dB typ.
- excellent output VSWR, 1.1:1 typ.

Applications

- VHF/UHF receivers/transmitters
- communications system



CASE STYLE: YY101

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _l -f _u																		
1-300	30	25	25	20	20	15	0.3	0.6	0.4	0.8	0.7	1.5	1	2	4	0.1	0.15	0.5

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)		Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	2-3					
1.00	5.13	5.13	5.13	0.01	29.54	28.48	0.02	1.17	1.19	1.19	1.20
20.00	5.05	5.06	5.04	0.02	31.30	31.53	0.11	1.12	1.06	1.06	1.06
40.00	5.09	5.08	5.08	0.01	29.82	30.37	0.19	1.13	1.06	1.06	1.06
60.00	5.11	5.11	5.12	0.00	28.34	29.07	0.33	1.15	1.06	1.06	1.06
80.00	5.11	5.11	5.13	0.02	26.92	27.83	0.44	1.17	1.06	1.06	1.05
100.00	5.18	5.17	5.20	0.03	25.71	26.74	0.56	1.19	1.07	1.06	1.05
120.00	5.24	5.23	5.26	0.03	24.65	25.78	0.67	1.22	1.07	1.06	1.05
140.00	5.25	5.24	5.28	0.04	23.74	24.93	0.75	1.25	1.08	1.07	1.05
160.00	5.26	5.25	5.32	0.07	22.93	24.16	0.80	1.27	1.08	1.07	1.05
180.00	5.31	5.29	5.37	0.08	22.22	23.51	0.86	1.29	1.08	1.07	1.05
200.00	5.47	5.45	5.55	0.10	21.71	23.02	1.00	1.32	1.09	1.08	1.05
220.00	5.44	5.42	5.54	0.12	21.15	22.50	1.04	1.34	1.09	1.08	1.06
240.00	5.43	5.41	5.56	0.16	20.71	22.08	1.09	1.36	1.10	1.08	1.06
260.00	5.46	5.43	5.62	0.19	20.32	21.72	1.23	1.37	1.10	1.09	1.06
280.00	5.60	5.57	5.79	0.22	20.06	21.49	1.26	1.39	1.10	1.09	1.06
300.00	5.71	5.66	5.90	0.24	19.86	21.31	1.27	1.40	1.10	1.09	1.06

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

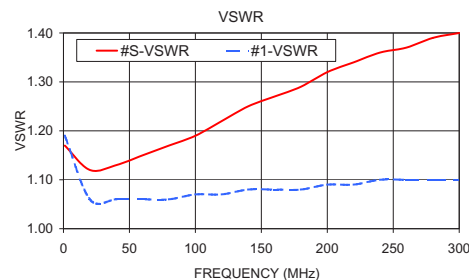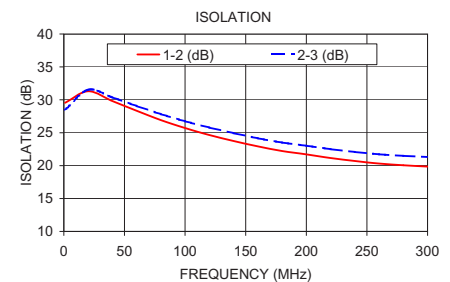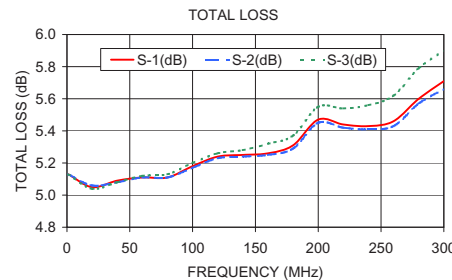

electrical schematic

