

Ultra-Wideband, DC Pass Directional Coupler

50Ω 30dB Up to 50W 0.5 to 18 GHz

ZUDC30-183-S+

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	3A
Supplied Termination	1W
Permanent damage may occur if any of these limits are exceeded	

Coaxial Connections


INPUT	IN
OUTPUT	OUT
COUPLED	CPL
TERMINATION (50Ω) INCLUDED	—

Features

- ultra wide frequency range, 0.5 to 18 GHz
- good coupling flatness, ± 0.4 dB typ.
- good directivity, 23dB typ. to 4 GHz
- good VSWR, 1.3 typ.
- DC current pass through input to output

Applications

- cellular
- lab use
- WiMax
- ISM
- GSM
- PCN




CASE STYLE: HT1967

Connectors Model No.
SMA ZUDC30-183-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

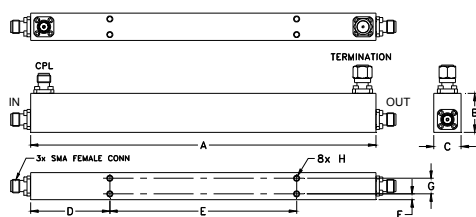

Outline Dimensions (inch/mm)

A	B	C	D	E
6.47	.73	.51	1.48	3.500
164.34	18.54	12.95	37.59	88.90
F	G	H		wt
.11	.293	#4-40		grams
2.79	7.44	UNC-2B		120.0


Electrical Specifications at 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Operating Frequency		0.5		18	GHz
Nominal Coupling (include flatness)	0.5 - 18	—	30 $\pm$ 3	—	dB
Coupling Flatness	0.5 - 4		± 0.3	± 0.7	dB
	4 - 12.4		± 0.4	± 0.8	
	12.4 - 18		± 0.6	± 1.4	
Mainline Loss	0.5 - 4	—	0.4	0.7	dB
	4 - 12.4	—	0.9	1.2	
	12.4 - 18	—	1.2	1.55	
Directivity	0.5 - 4	19	23	—	dB
	4 - 12.4	10	16	—	
	12.4 - 18	—	12	—	
Return Loss (In & Out)	0.5 - 4	—	22	—	dB
	4 - 12.4	—	18	—	
	12.4 - 18	—	17	—	
Return Loss (Coupling)	0.5 - 4	—	20	—	dB
	4 - 12.4	—	18	—	
	12.4 - 18	—	17	—	
Input Power ^{1,2}	0.5 - 4	—	—	50	W
	4 - 12.4	—	—	25	
	12.4 - 18	—	—	10	

1. At 25°C with no DC current. Derate linearly to 20, 10, 4W at 100°C

2. Peak power 3kW

Electrical Schematic

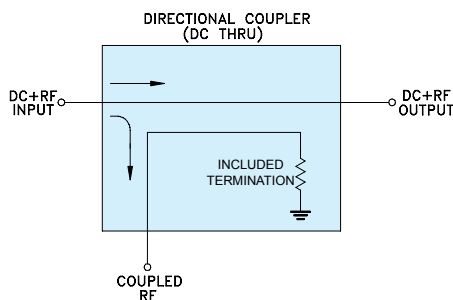

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M171494
ZUDC30-183-S+
RS/CP/AM
190109
Page 1 of 2

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
100	0.04	42.70	40.24	46.19	44.90	46.12
500	0.11	31.90	46.44	54.85	53.75	55.88
1000	0.17	31.70	39.76	40.11	39.39	41.00
2500	0.29	31.67	32.52	32.34	35.46	48.94
4000	0.40	31.60	25.34	24.66	24.66	30.87
6000	0.52	31.58	21.15	25.16	26.10	29.92
9000	0.68	31.57	33.22	26.77	27.54	39.41
12400	0.86	31.58	22.33	27.81	27.09	24.50
15000	1.01	31.44	27.27	27.15	28.30	32.07
18000	1.17	31.55	36.15	26.55	24.43	21.56
20000	1.29	30.85	23.16	22.13	20.96	23.26

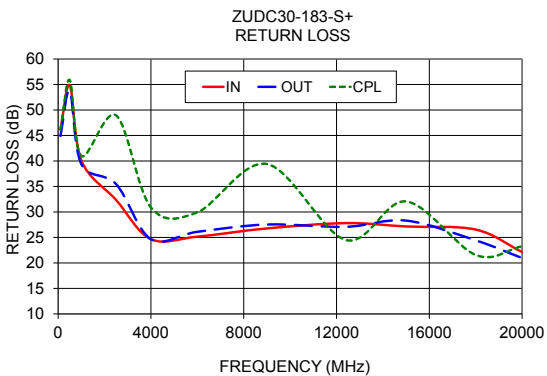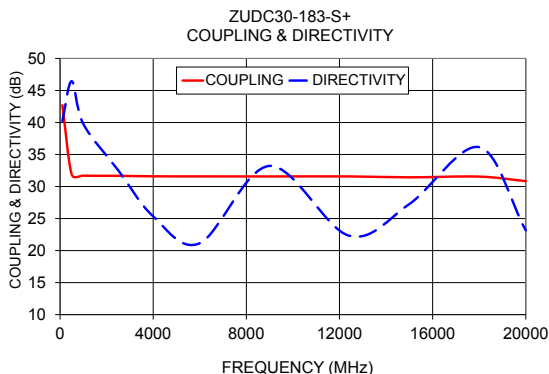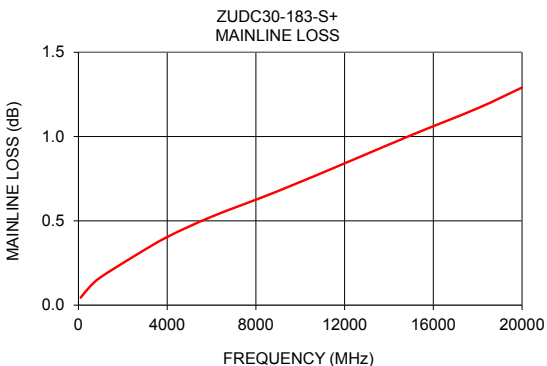

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

