

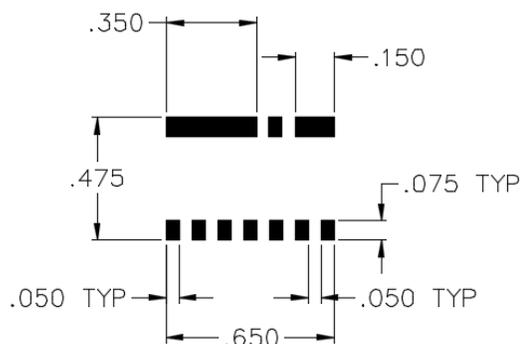


P4-01-E2

4-WAY SURFACE MOUNT POWER DIVIDER

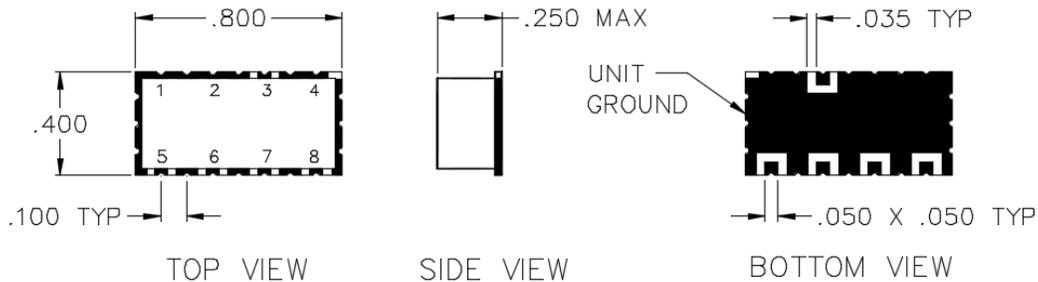

PCB PAD PATTERN
E2-4 WAY

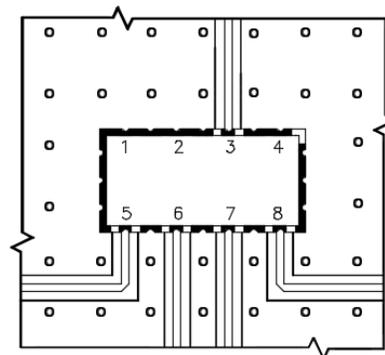

TYPICAL APPLICATION
ALL NON-USED PORTS AND UNIT GROUND
SHALL BE GROUNDED TO THE MAIN BOARD

SPECIFICATIONS

| | |
|--------------------|--------------|
| Name: | P4-01-E2 |
| Frequency Range: | 0.01-60 MHz |
| Insertion Loss: | 0.8 dB max. |
| Isolation: | 20 dB min. |
| Amplitude Balance: | 0.2 dB max. |
| Phase Balance: | 2° max. |
| VSWR: | 1.30:1 max. |
| Input Power: | 1 watts max. |
| Package Type: | Surface |

PORT CONFIGURATION

| | |
|---------|------------|
| Input: | 3 |
| Output: | 5, 6, 7, 8 |
| Ground: | Others |

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.