


# P4-13-E2

## 4-WAY SURFACE MOUNT POWER DIVIDER

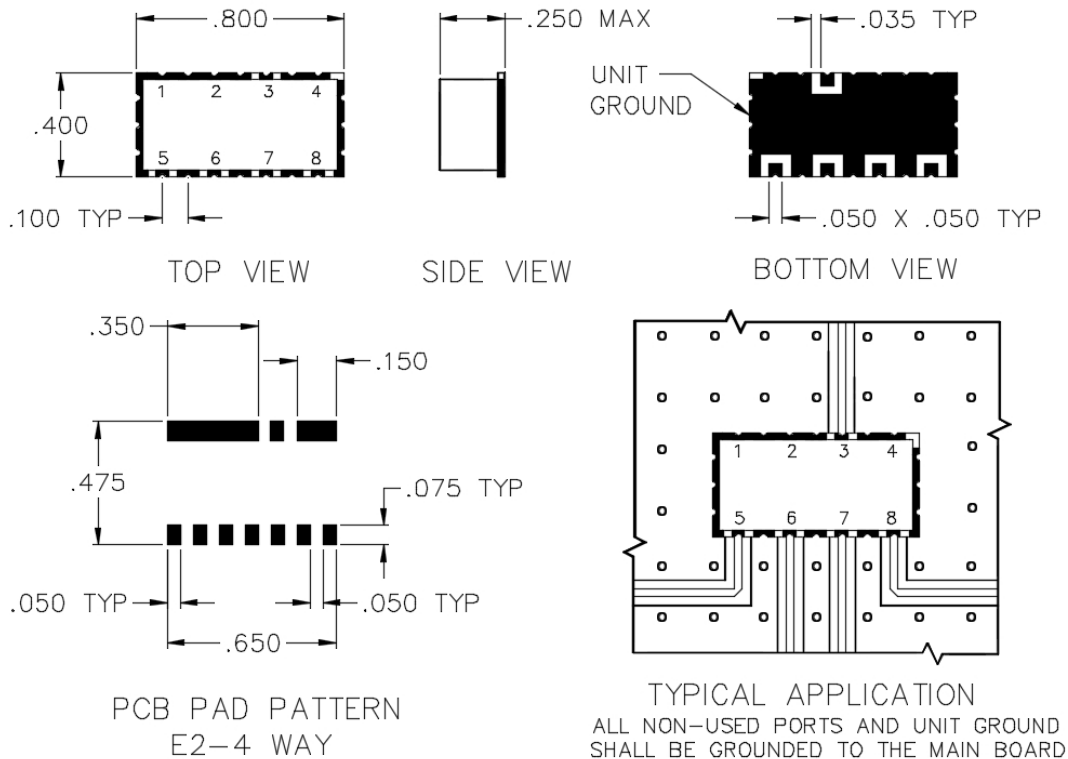

## SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P4-13-E2     |
| Frequency Range:   | 5-1000 MHz   |
| Insertion Loss:    | 1.6 dB max.  |
| Isolation:         | 20 dB min.   |
| Amplitude Balance: | 0.4 dB max.  |
| Phase Balance:     | 5° max.      |
| VSWR:              | 1.40:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Surface      |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

## PORT CONFIGURATION

|         |            |
|---------|------------|
| Input:  | 3          |
| Output: | 5, 6, 7, 8 |
| Ground: | Others     |