

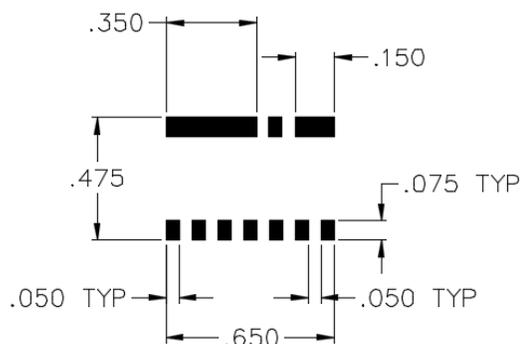


P4-07-E2

4-WAY SURFACE MOUNT POWER DIVIDER

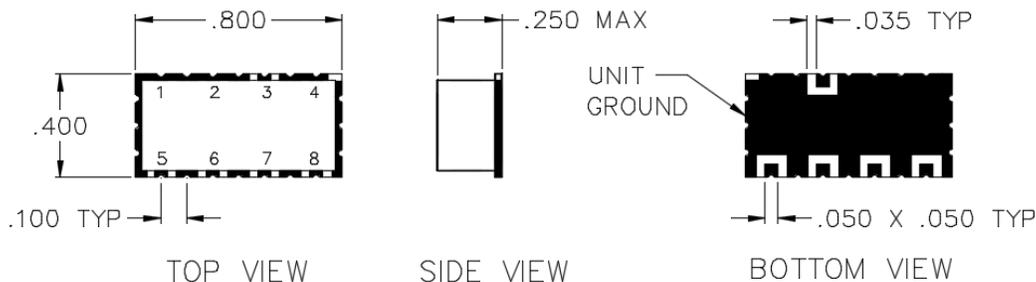

PCB PAD PATTERN
E2-4 WAY

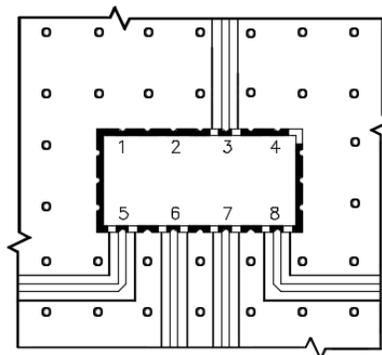

TYPICAL APPLICATION
ALL NON-USED PORTS AND UNIT GROUND
SHALL BE GROUNDED TO THE MAIN BOARD

SPECIFICATIONS

Name:	P4-07-E2
Frequency Range:	10-1000 MHz
Insertion Loss:	1.6 dB max.
Isolation:	23 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	5° max.
VSWR:	1.40:1 max.
Input Power:	1 watts max.
Package Type:	Surface

PORT CONFIGURATION

Input:	3
Output:	5, 6, 7, 8
Ground:	Others

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.