


P8-04-303

8-WAY FLATPACK POWER DIVIDER

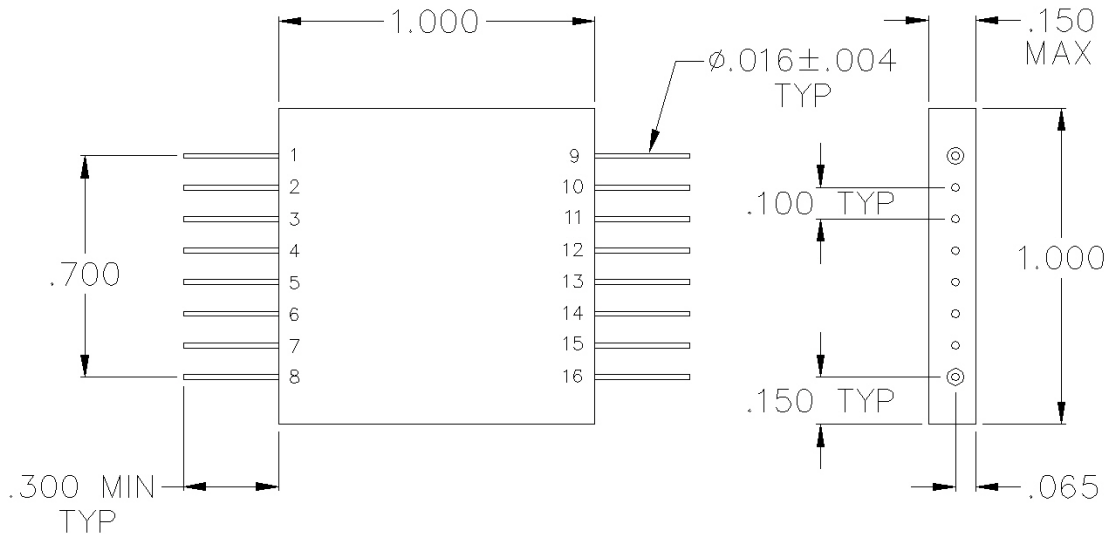

SPECIFICATIONS

Name:	P8-04-303
Frequency Range:	5-500 MHz
Insertion Loss:	1.6 dB max.
Isolation:	25 dB min.
Amplitude Balance:	0.3 dB max.
Phase Balance:	5° max.
VSWR:	1.30:1 max.
Input Power:	1 watts max.
Package Type:	Pin

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

PORT CONFIGURATION

Input:	4
Output:	9-16
Ground:	1-3, 5-8