


## 16-WAY SMA POWER DIVIDER

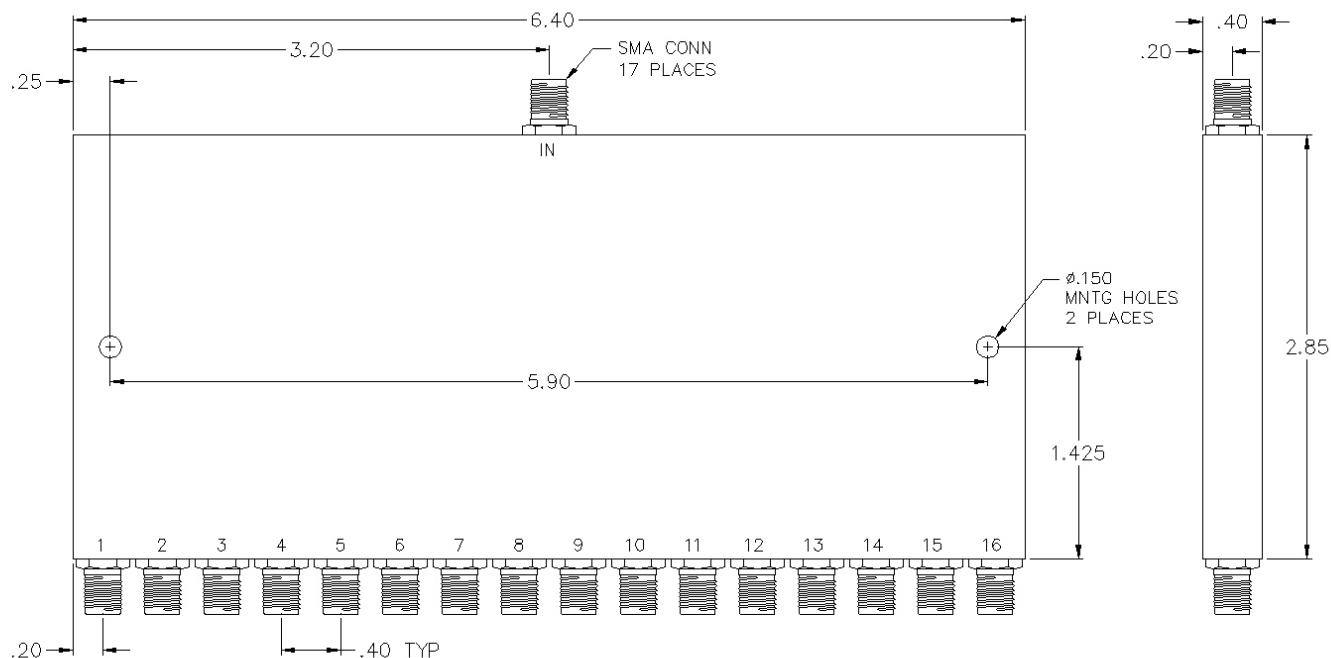

## SPECIFICATIONS

|                    |               |
|--------------------|---------------|
| Name:              | P16-06-456/1S |
| Frequency Range:   | 200-2000 MHz  |
| Insertion Loss:    | 8.0 dB max.   |
| Isolation:         | 16 dB min.    |
| Amplitude Balance: | 0.8 dB max.   |
| Phase Balance:     | 12° max.      |
| VSWR:              | 1.80:1 max.   |
| Input Power:       | 1 watts max.  |
| Package Type:      | SMA           |

Input power is specified for load VSWR better than 1.20:1.

Dimensions are in inches. Decimal tolerance: 2 Place:  $\pm .02$ , 3 Place:  $\pm .010$   
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

