

X2 Frequency Multiplier

50Ω Output 20 to 2000 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Input Power 200mW

Permanent damage may occur if any of these limits are exceeded.

Features

- wideband, 20 to 2000 MHz
- low insertion loss, 13 dB typ.
- rugged shielded case

Applications

- synthesizers
- local oscillators


MK-5



CASE STYLE: L19

Connectors Model
SMA MK-5
BRACKET (OPTION "B")
BRACKET (OPTION "BR")

Outline Drawing

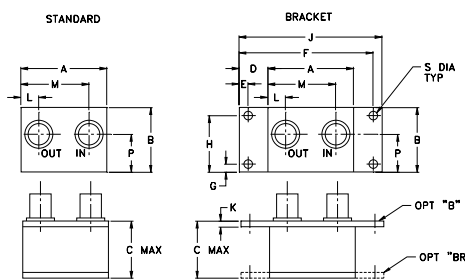

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	1.19	--	.66	.150	grams
63.50	2.54	7.87	30.23	--	16.76	3.81	37.0

Electrical Specifications





MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1	F2					F1	F3	F4			
	Input	Output	Min.	Max.	Typ.	Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.
2	10-600	20-1200	10**	20	13.0	15.0	20	10	26	20	15	10
	600-1000	1200-2000	10**	20	14.0	17.0	20	10	25	20	25	15

* Harmonics of input frequency below the power level of F2

** Minimum input power +13 dBm above 700 MHz.

Typical Performance Data

Input Frequency (MHz)	Conversion Loss (dB) F2	Harmonic Output (-dBc)		
		F1	F3	F4
10.00	12.28	20.30	26.20	15.60
25.00	12.35	21.40	27.00	13.60
50.00	12.31	22.00	27.30	14.30
75.00	12.35	22.00	26.00	14.60
100.00	12.27	21.80	25.20	14.40
200.00	12.27	24.80	28.30	15.00
400.00	13.42	20.00	33.40	15.20
600.00	12.09	16.20	26.80	23.20
800.00	12.92	15.60	28.70	24.20
1000.00	14.71	15.30	30.70	26.70

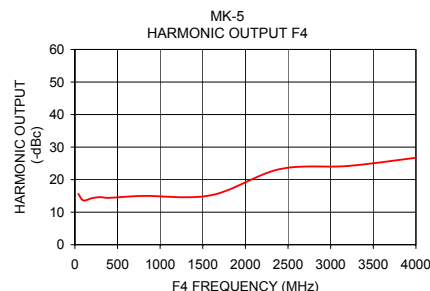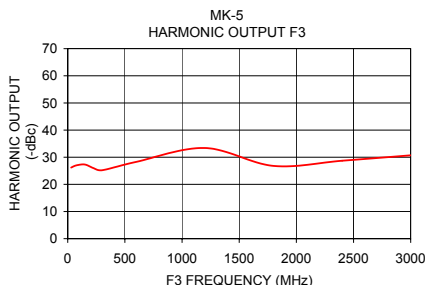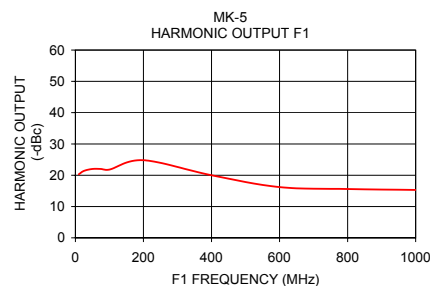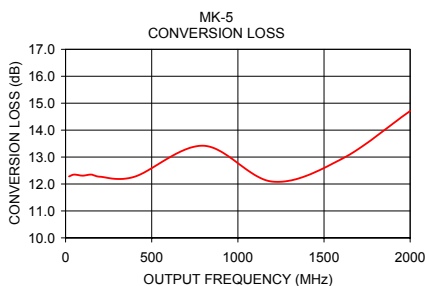

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
MK-5
AD/CP/AM
160615
Page 1 of 1