




SPECIFICATIONS

FREQUENCY RANGE	0.3-8.0 GHz
COUPLING (with respect to output)	
Nominal	20 ± 1.0 dB
Frequency Sensitivity	± 1.20 dB
DIRECTIVITY	> 20 dB
MAXIMUM VSWR (any port)	1.15
INSERTION LOSS (includes coupled power)	< 0.85 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
Optional:	N Female
WEIGHT (ounces)	3.8
OPERATING TEMPERATURE	-54° to $+85^{\circ}$ C

DIMENSIONS

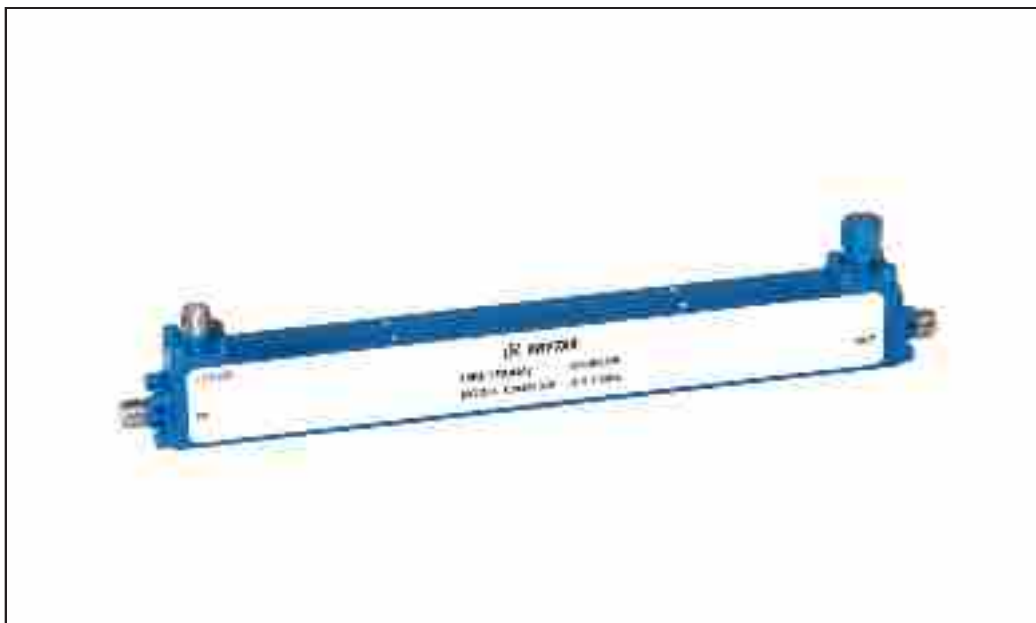