
MODEL No.:

18270-04G

NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

- PERFORMANCE IS DEPENDENT UPON THE SPECIFIC CABLE
 SELECTED AND THIRD-PARTY CABLE PREPARATION BEYOND
 THE CONTROLL OF SOUTHWEST MICROWAVE.
- 5. SPECIFICATIONS PER SPECIFICATION SHEET 91RV61135.
- 4. CABLE TERMINATION INSTRUCTION SPEC. 91BP60518
- 3. MATERIAL AND FINISH:
 - 3.1 MATERIALS
 - 3.1.1 CENTER CONTACTS, RETAINING RING: BeCu ALLOY
 - 3.1.2 HOUSING, BUSHING: BRASS ALLOY
 - 3.1.3 COUPLING NUT: STAINLESS STEEL
 - 3.1.4 BEAD RING: ULTEM 1000 PER ASTM D5205
 - 3.1.5 GASKET: SILICONE RUBBER
 - 3.2 FINISHES
 - 3.2.1 CENTER CONTACTS, HOUSING AND BUSHING: GOLD PLATE PER MIL-DTL-45204
 - 3.2.2 COUPLING NUT: PASSIVATE PER ASTM A967
- CONNECTOR DESIGN IS COMPATIBLE WITH CURRENT MATERIAL AND PROCESS REQUIREMENTS FOR RoHS AND WEEE PER EUROPEAN COMMUNITY DIRECTIVE 2002/95/EC.
- ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED.

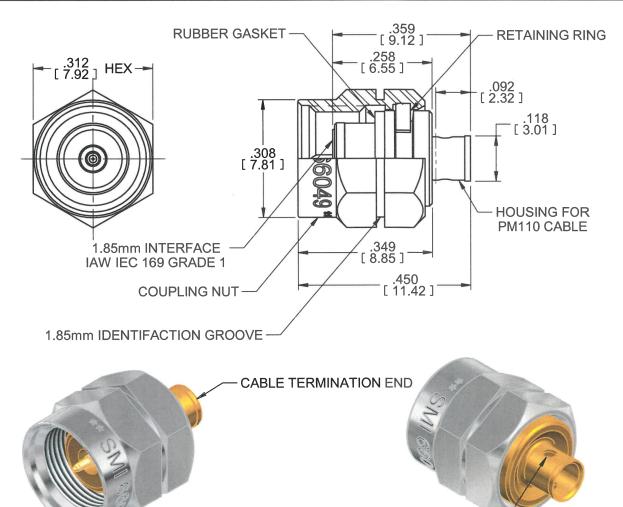

CABLE CENTER CONDUCTOR ALIGNMENT

SIGHT HOLE/SOLDER HOLE

TITLE



1.85mm, P, DS, PM110 CBL

ORN BY: T. CLARE	DATE: 8/22/14	MODEL NO.	18270-04G	REV.
SCALE 4:1			10210-040	Λ
SHEET: 1 OF 1		DWG. NO.	79RV61859	