




RF-LAMBDA

The power beyond expectations

RFSP2TR0209M

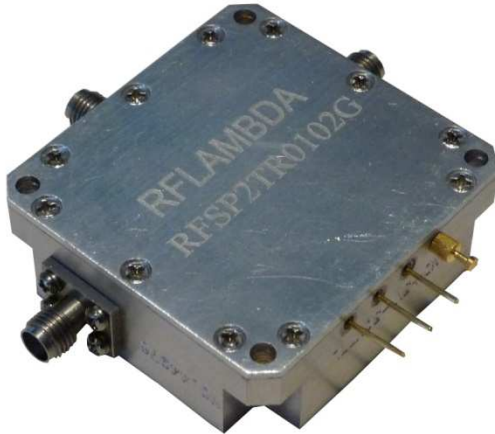

Reflective 200-975MHz 240W (PK) 50W CW Coaxial SPDT

Wide Band Operation
High Power Handle 240W
TTL compatible driver include
Fast Switching Speed 4us
Low Insertion Loss and High Isolation
Temperature Range -40°C~+85°C
Customization available upon request

Reflective SPDT- Single Pole Double Throw							
Frequency (MHz)	Insert. Loss (dB)	VSWR (Max:1)	Isolation min (dB)	Peak Power (Watts)	Average Power	Switching Speed (us)	TTL Control 5V
200-975	0.7 typ. 1.0dB max.	1.50	65dB typ. 60dB min	240W **	50W CW	3us	"0": J1-"ON", J2-"OFF" "1": J1-"OFF", J2-"ON"

** Peak power 240W, @ 10% duty cycle, 5us pulses


hot start

hot switchable

(DC power first, followed by RF power)

(switching without turning off RF power)

** +5V≤200mA/ -28V≤50mA

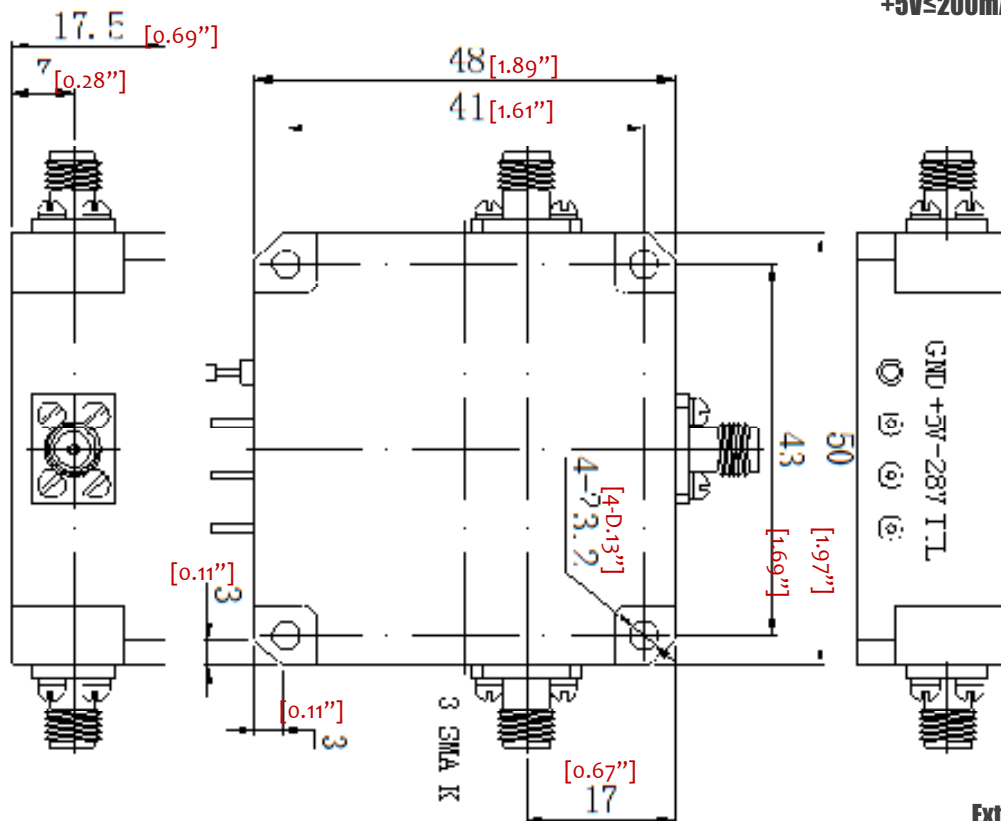

External Finishing:
Metal conductive oxidizing




Reflective Coaxial Single Pole Double Throw Switch 200-975MHz



RF-LAMBDA

The power beyond expectations

RFSP2TR0209M

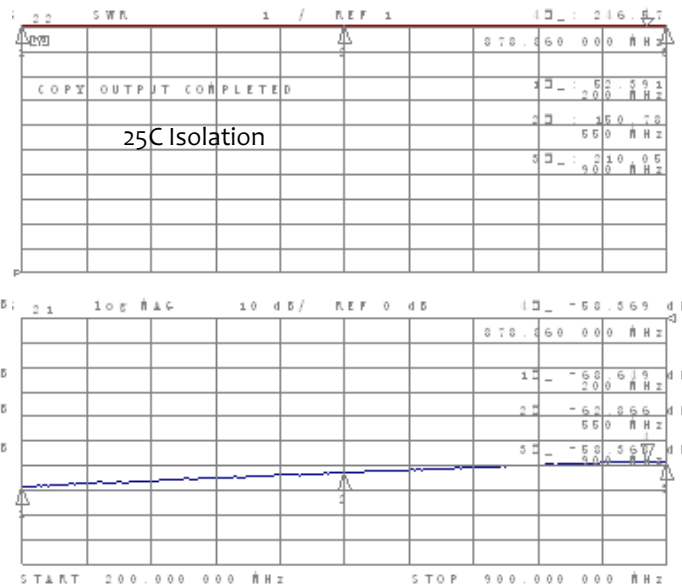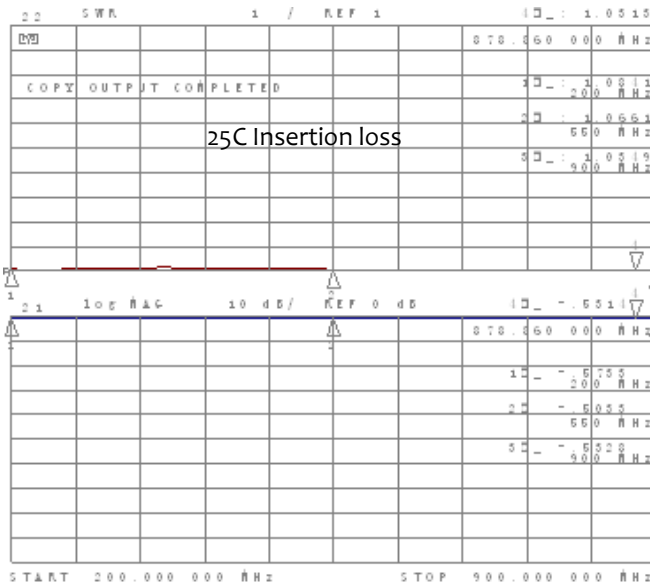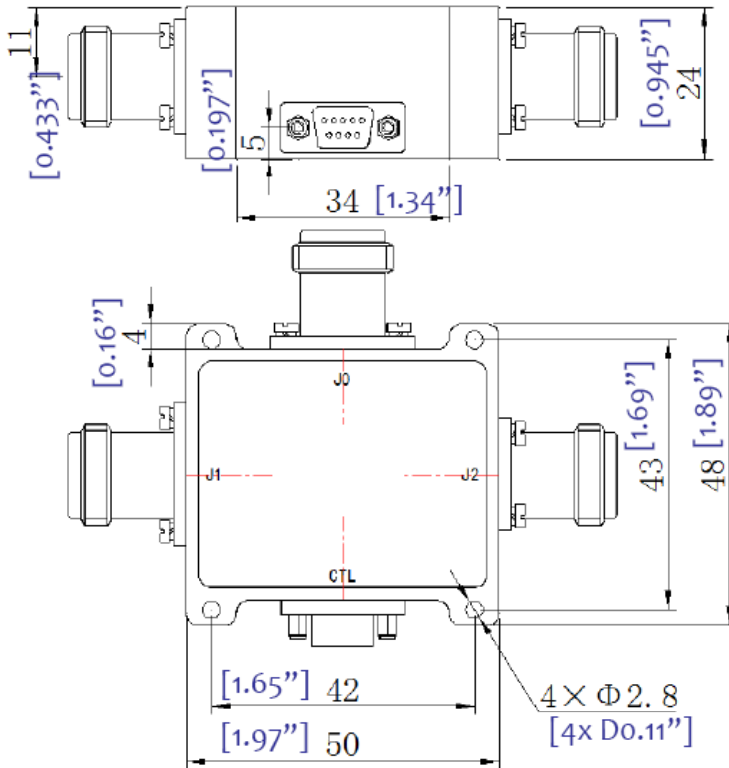

Reflective Coaxial Single Pole Double Throw Switch 200-975MHz







RF-LAMBDA

The power beyond expectations

RFSP2TR0209M

Reflective Coaxial Single Pole Double Throw Switch 200-975MHz

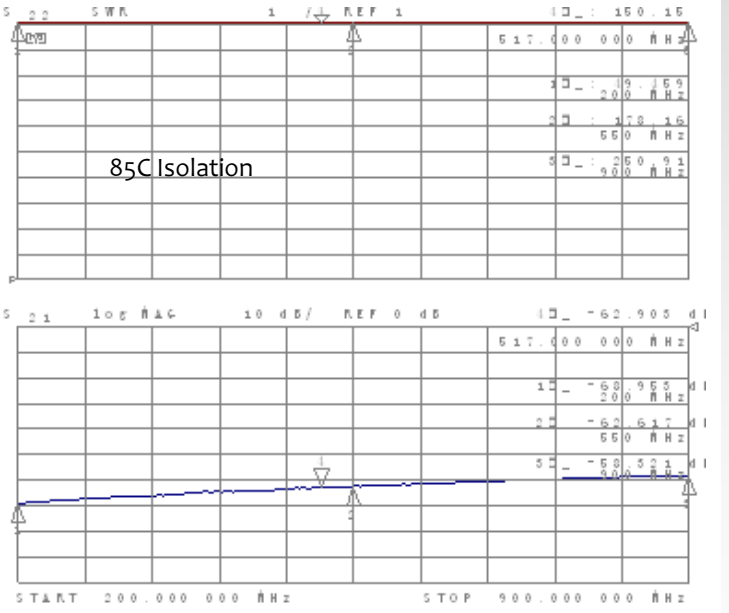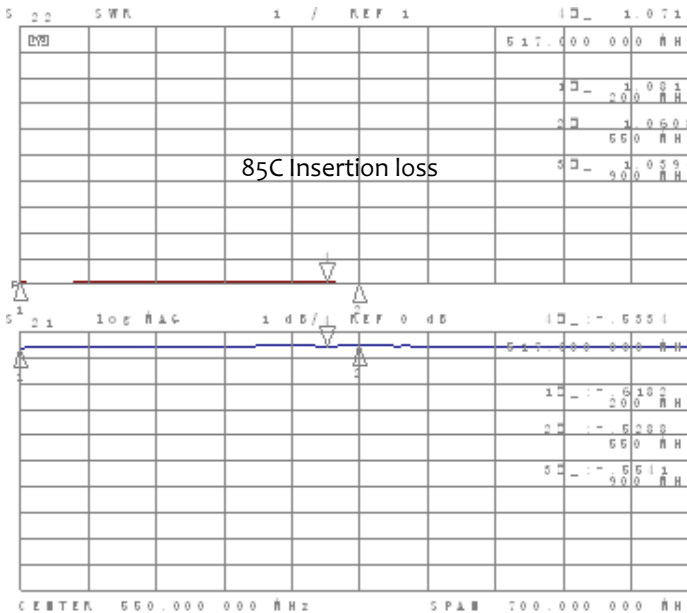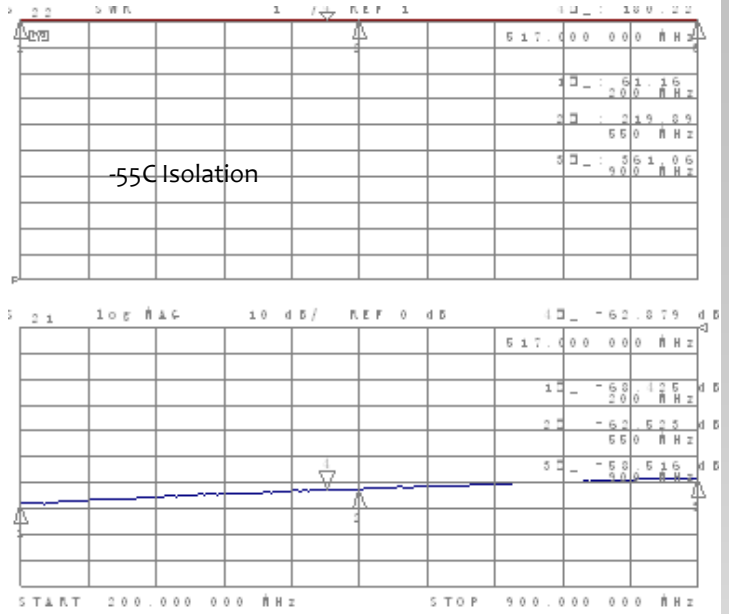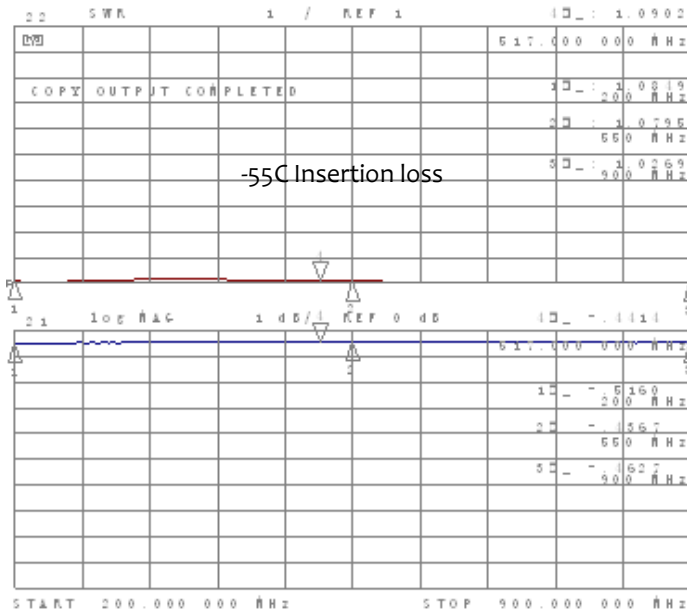



RF-LAMBDA

The power beyond expectations

RFSP2TR0209M

Reflective Coaxial Single Pole Double Throw Switch 200-975MHz

