


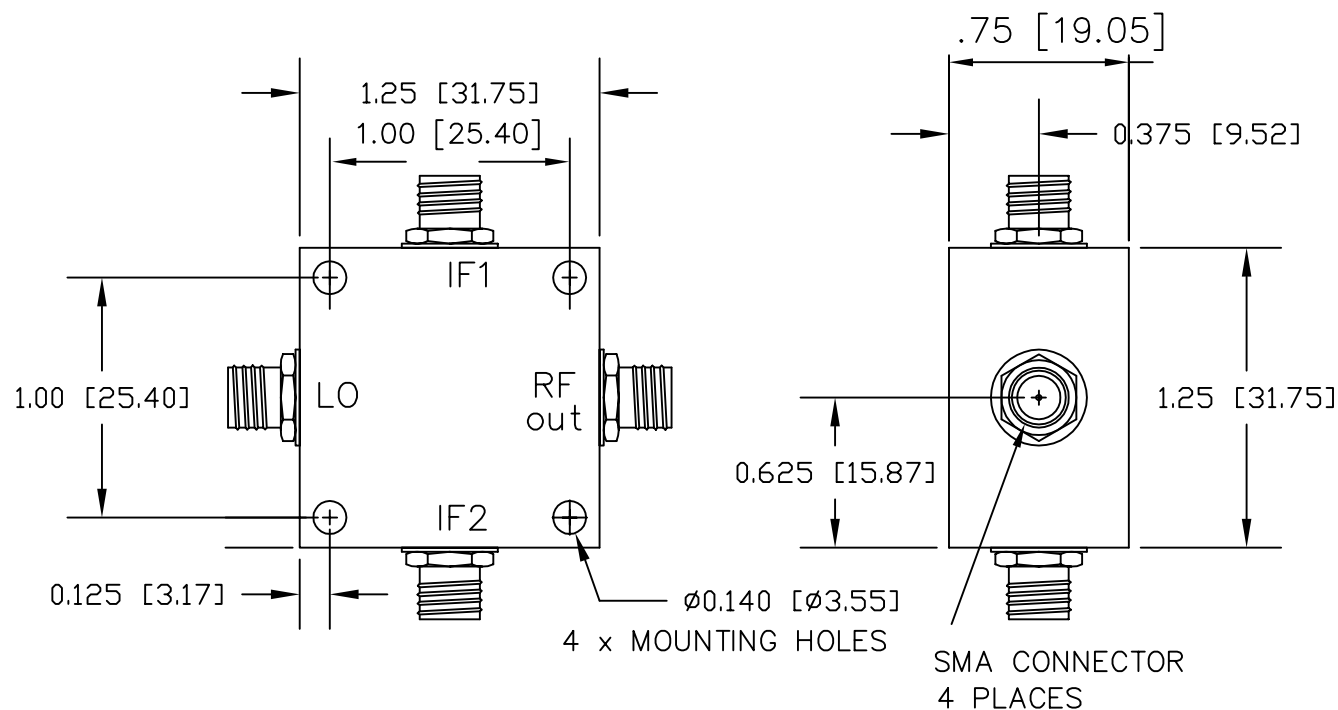

Electrical: Specifications:

LO Freq. Range: @ +10dBm 1800 - 2000 MHz
 RFout Freq. Range: LO $\pm$ IF Mhz
 IFin Frequency: @ -10dBm 70 $\pm$ 10 Mhz
 Conversion Loss: 9.0 dB Max
 SideBand Rejection: IF1, IF2 20 dBc Min
 LO Rejection: 15 dBc. Min

SigaTek

423 Black Oak Ridge Rd.
 Wayne, NJ 07470
 Ph: 973-706-8475, Fax : 973-832-4435
www.sigatek.com

QR23A10

Image Reject Mixers

Dimensions are in inches and (mm)
 Decimal Tolerance:
 2 place ± 0.020
 3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
 Specifications are subject to change at any time without any notice.
 Copy or distribution of this drawing is prohibited.