


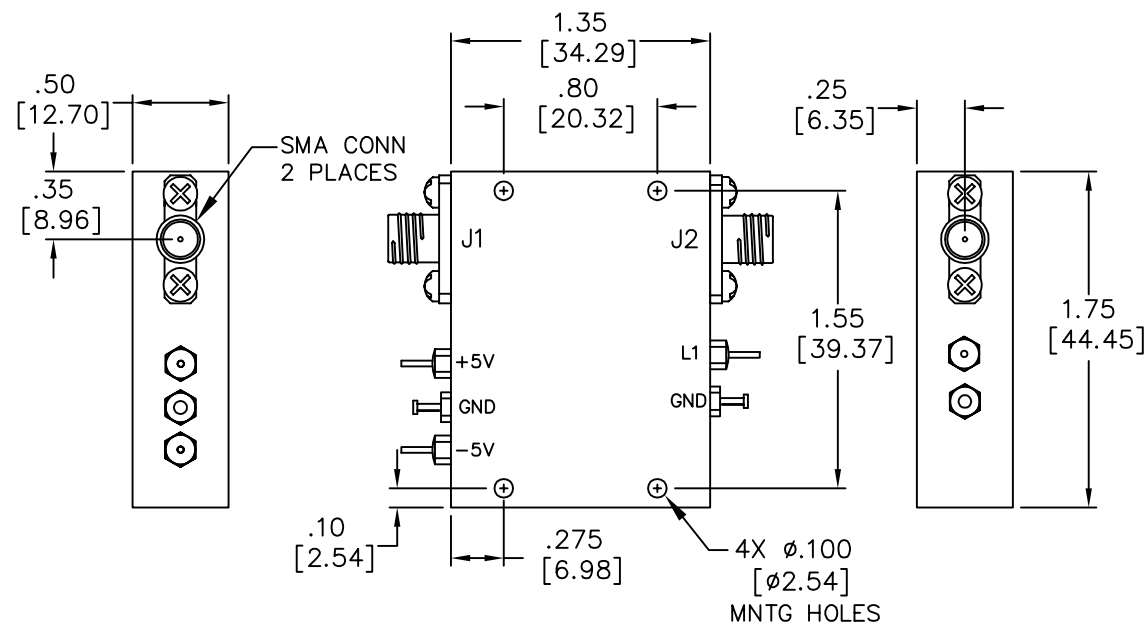

Electrical:

Type:

Frequency Range:

Insertion Loss:

Isolation:

VSWR:

RF Power In:

DC Voltage:

DC Voltage:

Control Logic:

Specifications:

Reflective

0.5 - 16.0 GHz

2.8 dB Max

55 dB Min

1.90:1 Max

23 dBm Typ

+5 Vdc @ +40 mA Typ

-5 Vdc @ -40 mA Typ

TTL

TTL Control Logic for SP1T

L1	J1 to J2				
1	Isolation				
0	Loss				

SigaTek

423 Black Oak Ridge Rd.

Wayne, NJ 07470

Ph: 973-706-8475, Fax : 973-832-4435

www.sigatek.com

PW1R-14

Dimensions are in inches and (mm)

Decimal Tolerance:

2 place ± 0.020

3 place ± 0.010

Pin Diode, SP1T
Single Push Single Throw

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.