


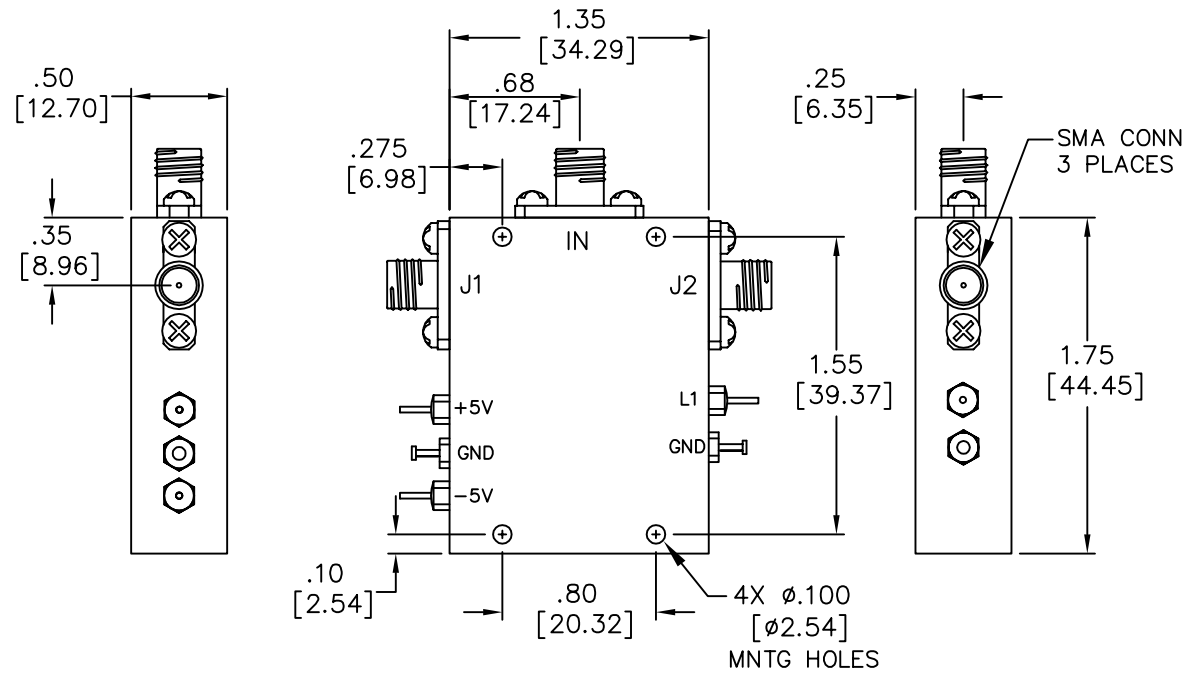

Electrical:		Specifications:	
Type:		Absorptive	
Frequency Range:		0.5 - 12.4 GHz	
Insertion Loss:		3.2 dB Max	
Isolation:		60 dB Min	
VSWR:		1.90:1 Max	
RF Power In:		23 dBm Typ	
DC Voltage:		+5 Vdc @ +50 mA Typ	
DC Voltage:		-5 Vdc @ -40 mA Typ	
Control Logic:		TTL	

TTL Contol Logic for SP2T					
L1	IN to J1	IN to J2			
1	Isolation	Loss			
0	Loss	Isolation			

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470
Ph: 973-706-8475, Fax : 973-832-4435
www.sigatek.com

PW2A-13

Pin Diode, SP2T
Single Push Double Throw

Dimensions are in inches and (mm)
Decimal Tolerance:
2 place ± 0.020
3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.