


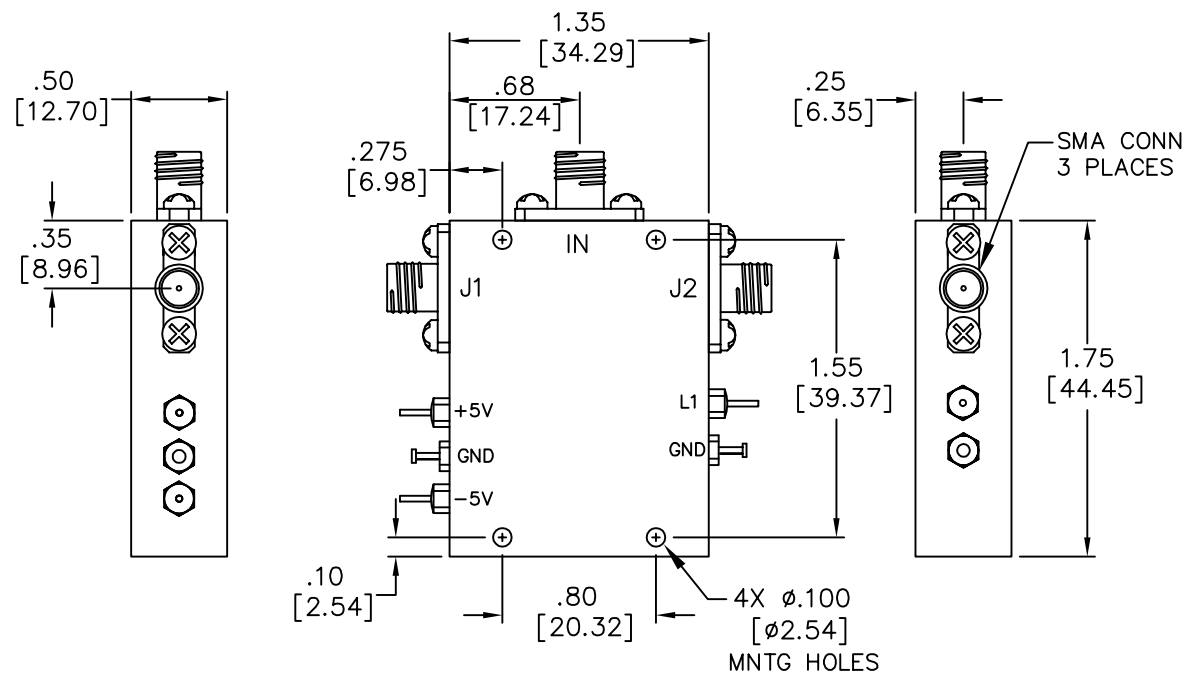

Electrical:

Type:

Frequency Range:

Insertion Loss:

Isolation:

VSWR:

RF Power In:

DC Voltage:

DC Voltage:

Control Logic:

Specifications:

Reflective

0.5 - 16.0 GHz

2.8 dB Max

55 dB Min

1.90:1 Max

23 dBm Typ

+5 Vdc @ +50 mA Typ

-5 Vdc @ -40 mA Typ

TTL

TTL Control Logic for SP2T

L1	IN to J1	IN to J2			
1	Isolation	Loss			
0	Loss	Isolation			

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470

Ph: 973-706-8475, Fax : 973-832-4435
www.sigatek.com

PW2R-14

Pin Diode, SP2T
Single Push Double Throw

Dimensions are in inches and (mm)
Decimal Tolerance:
2 place ± 0.020
3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.