



DC-26.5GHz 5W TERMINATION--- RFST5G26

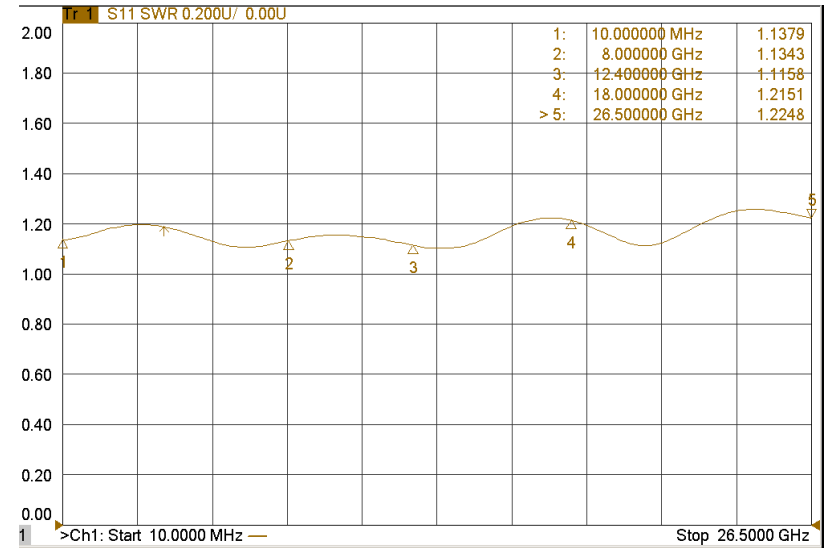


1.0 Mechanical Specifications		
1.1	Coaxial Connector	SMA (Male or Female)
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	10g

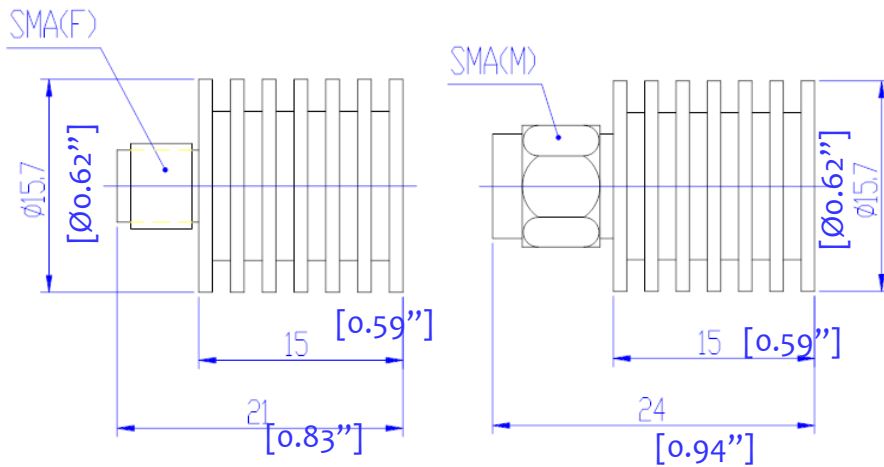

2.0 Environment specifications		
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40c
2.5	Shock	20G for 11msc

3.0 Electrical Specifications		
3.1	Frequency Range	DC-26.5GHz
3.2	Average Power	5W 25°C 0.5W 125°C
3.3	VSWR	1.30 :1
3.4	Peak Power	0.5 KW

PAGE 1 OF 1		DATE	MAY 6 th 2000
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	10
		ASSEMBLY REVISION	V552
 RFST5G26 Termination		ASSEMBLY NAME	RFLVR07
www.rflambda.com		DRAWING NUMBER	D05-A
RF-LAMBDA		SIZE	LT
		SHEETS	1 OF 1