


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

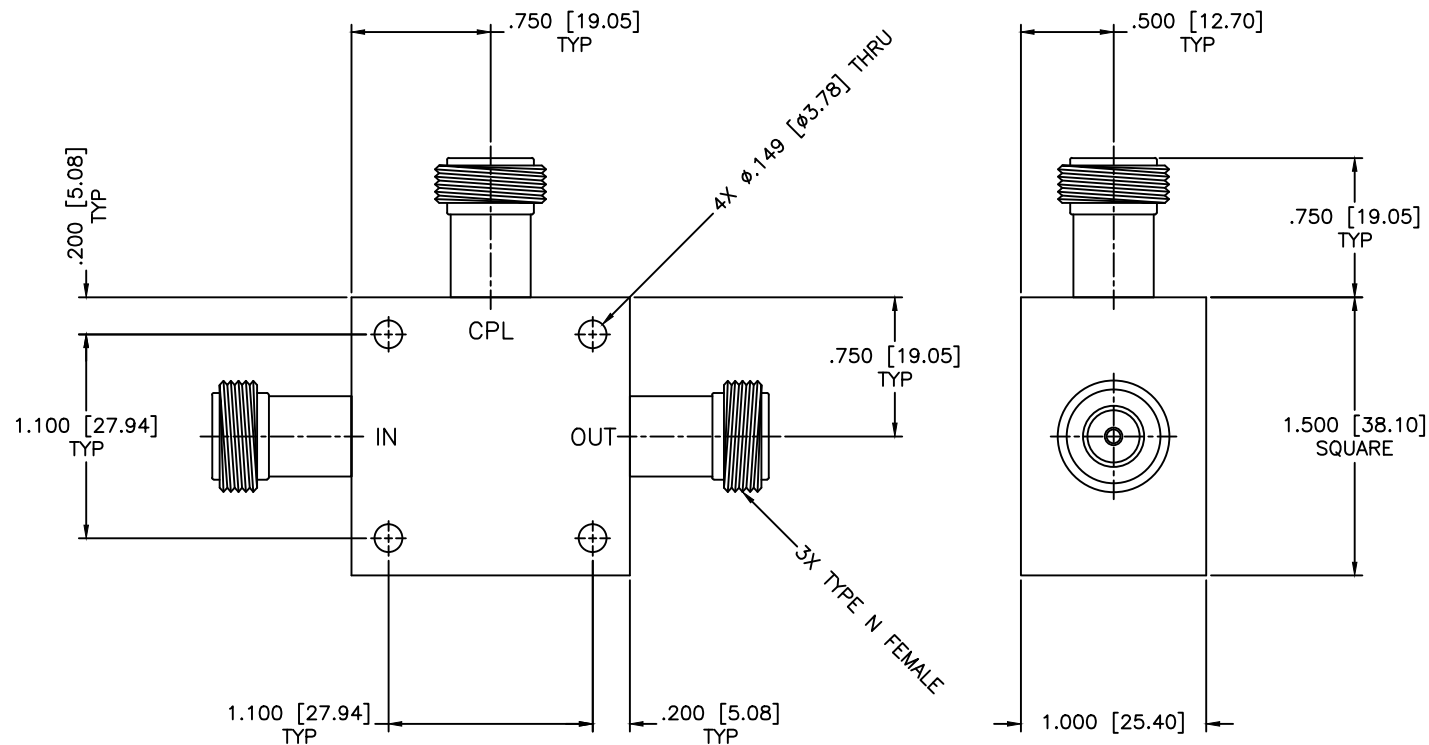

SPECIFICATIONS

Frequency Range: 10–100 MHz
Coupling: 6.5±0.5dB
Insertion Loss: 2.2dB Max.
Flatness: ±0.25dB
Directivity: 30dB Min.
VSWR: 1.30:1 Max.
Operating Temperature: –55°C to +85°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Pailoon Luekhamhan DATE: 11-09-1997		DRAWING TITLE: DIRECTIONAL COUPLER		
APPROVED: T. Nguyen DATE: 11-09-1997		PART NO. CL3-6/NF		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A DO NOT SCALE THE DRAWING	REV: N/A DWG NO. 82585