


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

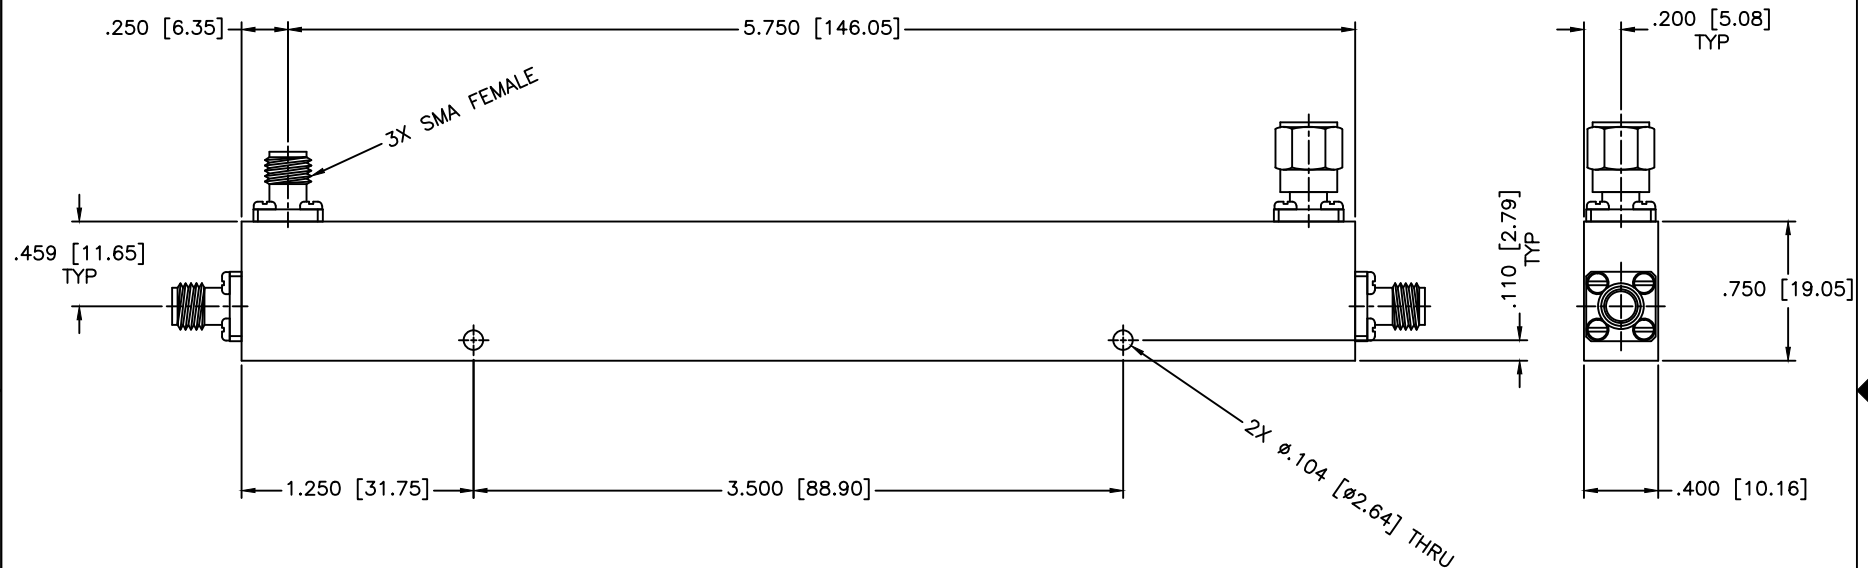

SPECIFICATIONS

Frequency Range: 0.4–6 GHz
 VSWR: 1.40:1 Max.
 Coupling: 20 ± 1.0 dB
 Insertion Loss: 0.9 dB Max.
 Directivity: 14 dB Min.
 Power: 20W, 3kW Peak
 Frequency Sensitivity: ± 0.75 dB

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: DIRECTIONAL COUPLER		PART NO. CB22-20		
DRAWN: Paiboon Luekhamhan	DATE: 06-10-2011	CAGE CODE: OD2L5	SIZE: A DO NOT SCALE THE DRAWING	DWG NO. 83021
APPROVED: T. Nguyen	DATE: 06-10-2011	THIRD ANGLE PROJECTION 