

Ka Band SPST PIN Switch with TTL Drive, 34 to 37 GHZ

Description:

Model SKS-3433732530-2828-RS is a PIN diode based, single pole, single throw (SPST) switch with a TTL driver that covers 34 to 37 GHz. This model offers a low insertion loss of 2.3 dB with a typical isolation of 30 dB. The SPST switch has a WR-28 waveguide with UG-599/U flanges at the RF input and output and an SMA(F) connector for TTL control. The SPST switch can be modified for various operational frequencies under different model numbers.



Features:

- Low Insertion Loss
- High Isolation
- Fast Control Speed

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	34 GHz		37 GHz
Insertion Loss		2.3 dB	
Isolation	25 dB	30 dB	
Power Handling		+20 dBm	+23 dBm
Bias Voltage		$\pm 5 V_{DC}$	
Bias Current		10 mA	
Control Signal		TTL	
Switching Speed		100 ns	
Specification Temperature		+25°C	
Operating Temperature	-25°C		+65°C


Mechanical Specifications:

Item	Specification
RF Ports	WR-28 Waveguide with UG-599/U Flange
TTL Control Port	SMA(F)
Case Material	Aluminum
Finishing	Gold Plated
Weight	1.0 Oz
Insertion Length	1.25"
Outline	KS-RA




Ka Band SPST PIN Switch with TTL Drive, 34 to 37 GHz

Typical Insertion Loss and Isolation vs. Frequency

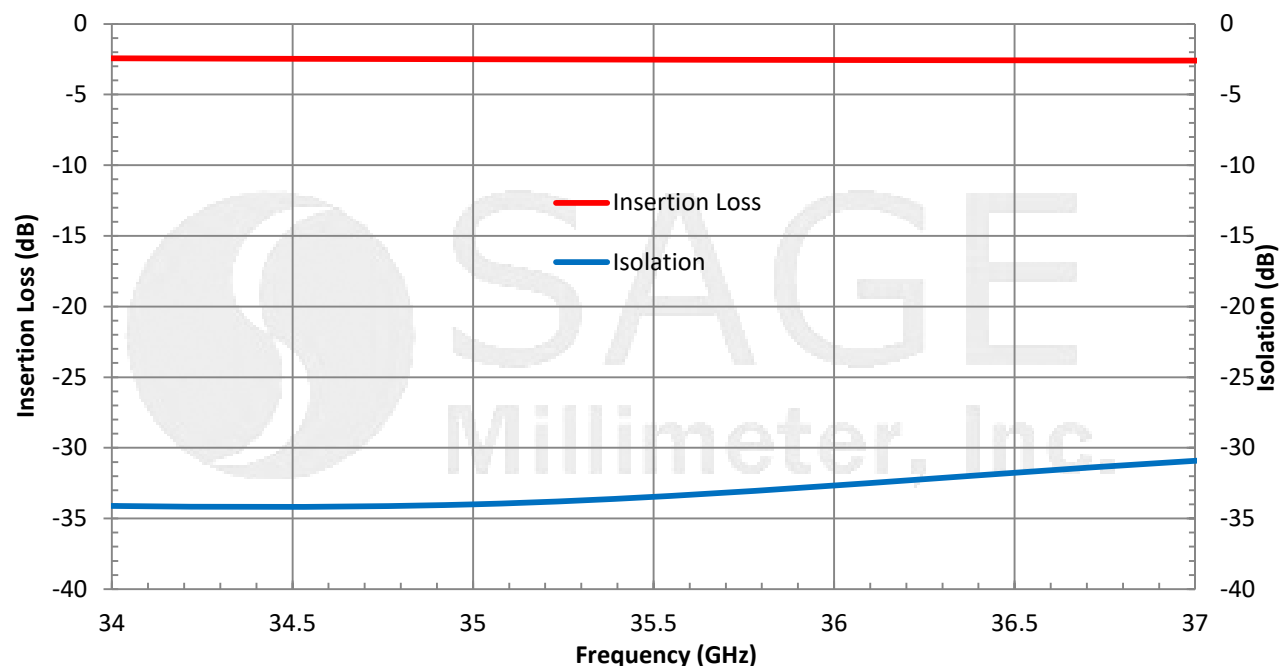

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

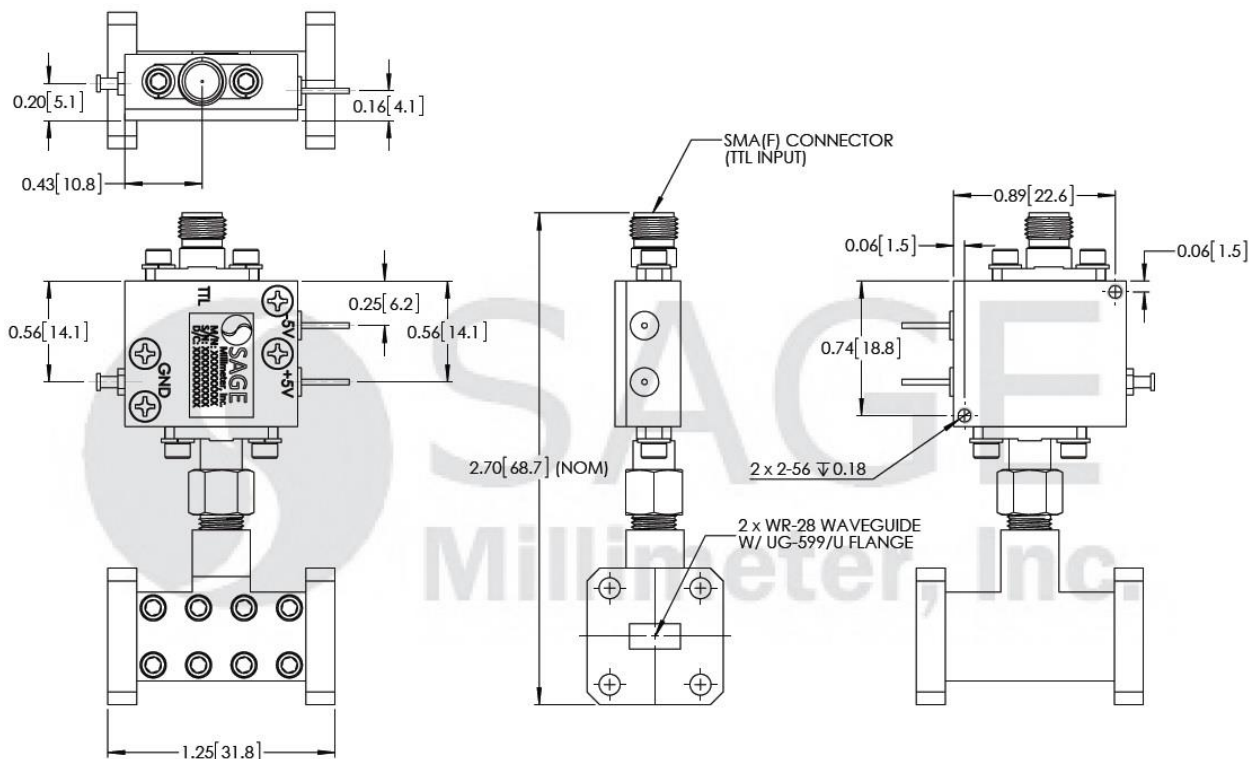



Ka Band SPST PIN Switch with TTL Drive, 34 to 37 GHZ

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25°C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The switch is a static sensitive device. Always follow ESD rules when working with the switch.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

