

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc. and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use, or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co., Inc.

REV.	DESCRIPTION	DATE	APP'D.
A	RELEASE PER GM-7119	4/28/97	


MATERIAL AND FINISH

HOUSING: CRES 303 PER ASTM A 484 AND ASTM A 582 OR ASTM A 555 AND ASTM A 581. PASSIVATE PER MIL-F-14072 E 300.

CONTACT: BERYLLIUM COPPER PER ASTM B196 AND/OR ASTM B197. GOLD PLATE PER MIL-G-45204; TYPE I, GRADE C, CLASS 1.

DIELECTRICS: VIRGIN PTFE FLUOROCARBON PER ASTM D 1710 AND ASTM D 1457.

O-RING: VITON (FLUOROCARBON) PER MIL-R-83248/1.

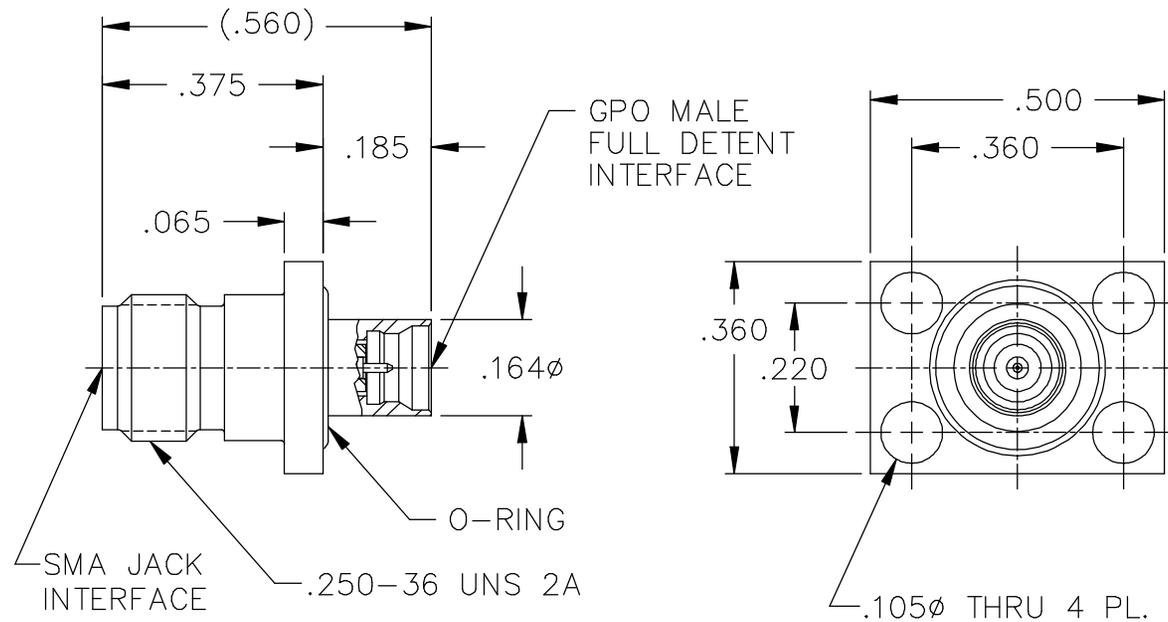

ALL DIMENSIONS ARE IN INCHES

CAT. NO. 00219-139-3E

CODE IDENT NO. 82316

GILBERT ENGINEERING CO., INC.

BY	DATE	TITLE	DWG. NO.	REV
DRAWN: MJC	4/28/97	OUTLINE DRAWING FOR GPO MALE FULL DETENT TO SMA JACK 4 HOLE FLANGE MOUNT ADAPTOR	OL-00219-139-3E	A
ASSEMBLY PROCEDURES: NONE				
SOURCE FILE: SK-1188	SHT. 1 OF 1			