

DESCRIPTION:


PFC model number 6CL6D15G-300-CD-SFF is a Combine filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: 6.15 GHz
- 3dB BANDWIDTH: 300 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND): <= -4 dB MAX.
- REJECTION: 6 POLE RESPONSE

- CONNECTORS: SMA FEMALE CONNECTORS

- SIZE: 2.25" (L) x 0.40" (W) x 0.50" (H)
- WEIGHT: 1 OZ. TYP.

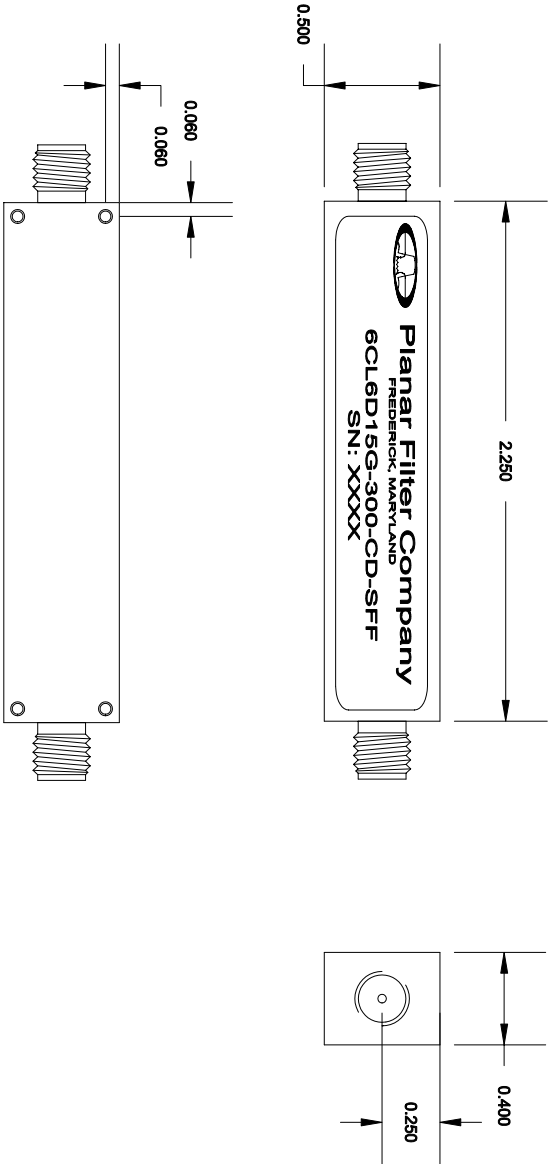

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	-	ORIGINAL RELEASE	10/16/00
A		CHANGE SPECIFICATIONS	7/8/01

PART NO. PF 60-354		Planar Filter Company 7311G Grove Road, Fredrick, Maryland	
APPROVALS	DATE	TITLE	
DRAWN S. PALACIO	10/16/00	OUTLINE DRAWING 6CL6D15G-300-CD-SFF	
CHECKED		SIZE FSCM NO. DWG NO. 155-0439	
ISSUED		SCALE N/A	
		SHEET 1 OF 1	

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXXX ±0.005