DESCRIPTION:

connectors in and out. All filters will be machined and silver plated to provide the highest possible Q. PFC model number 6CL6D60G-300-CD-SFF is a Combline filter with SMA female

> ZONE REV. \triangleright CHANGE DESCRIPTION ORIGINAL RELEASE DESCRIPTION 10/16/00 7/8/01 DATE APPROVED

SPECIFICATIONS:


• CENTER FREQUENCY: 6.6 GHz

 3dB BANDWIDTH: 300 MHz

VSWR IN THE PASS BAND: 1.5:1 MAX.

• INSERTION LOSS (PASSBAND) <= -4 dB MAX.

REJECTION: **6 POLE RESPONSE**

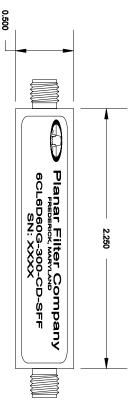


0.400

0.250

CONNECTORS: SMA FEMALE CONNECTORS

SIZE 2.25" (L) \times 0.40" (W) \times 0.50" (H)

WEIGHT 1 0Z. TYP.

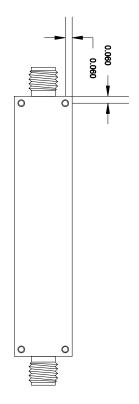

ENVIRONMENTAL RATINGS:

TEMPERATURE: -55°C TO +85°C (OPERATING) -65°C TO +125°C (STORAGE)

• SHOCK: HUMIDITY: MIL-STD-202F, METHOD 103B COND. B MIL-STD-202F, METHOD 213B COND. B

VIBRATION: MIL-STD-202F, METHOD 204D COND. B

ALTITUDE: MIL-STD-202F, METHOD 105C COND. B

SALT FOG: MIL-STD-202F, METHOD 107D COND. A

FUNGUS: TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107 MIL-STD-810C, METHOD 508.2

PART NO. PF60-355	J	Planar Filter Company 7311G Grave Road Fredrick Maryland
	2	70110 Clove (Cad, 1 lealier, Ivial ylailu
APPROVALS	DATE	TITLE
S. PALACIO 10/16/00	10/16/00	OUTLINE DRAWING
CHECKED		
ISSUED		SIZE FSCM NO. DWG NO.
		2 10 100 2100 2100

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

				HLIL	> 1	S
				HUIL 10/10/00	10/18/00	DATE
SCALE N/A	 A 10JW0	SIZE FSCM NO.	0000			TITLE
SHEET 1 OF	155-0440	DWG NO.		80180800 300 00 8FF	OUTLINE DRAWING	

> ₽