DESCRIPTION:

connectors in and out. All filters will be machined and silver plated to provide the highest possible Q. PFC model number 5CL5G-75-CD-SFF is a Combline filter with SMA female

> ZONE REV. 1 ORIGINAL RELEASE DESCRIPTION 6/19/00

> > APPROVED

SPECIFICATIONS:


• CENTER FREQUENCY: 5000 MHz


 3dB BANDWIDTH: 75 MHz

VSWR IN THE PASS BAND: 1.5:1 MAX.

INSERTION LOSS (PASSBAND) <= 4.2 dB MAX.

REJECTION: **5 POLE RESPONSE**

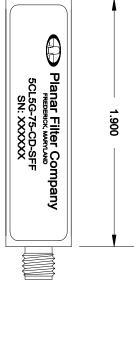




CONNECTORS: SMA FEMALE CONNECTORS

0.500

SIZE 1.90" (L) \times 0.50" (W) \times 0.50" (H)

WEIGHT 1 0Z. TYP.

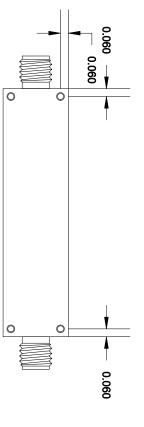

ENVIRONMENTAL RATINGS:

TEMPERATURE: -55°C TO +85°C (OPERATING) -65°C TO +125°C (STORAGE)

HUMIDITY: SHOCK: MIL-STD-202F, METHOD 103B COND. B MIL-STD-202F, METHOD 213B COND. B

VIBRATION: MIL-STD-202F, METHOD 204D COND. B

ALTITUDE: SALT FOG: MIL-STD-202F, METHOD 105C COND. B MIL-STD-202F, METHOD 107D COND. A

FUNGUS: MIL-STD-810C, METHOD 508.2

TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

27300190	0	Planar I	(1) Planar Filter Company 7311G Grove Road Fredrick Mandand
APPROVALS	DATE	TILE COOK	Your, I fourth, Maryland
DRAWN		2	
S. PALACIO 4/12/04	4/12/04	л	
CHECKED			JCLJG-/J-CD-JFF
ISSUED		SIZE FSCM NO.	DWG NO.
		A 1QJWO	27300190

SCALE N/A

SHEET

유

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION