

DESCRIPTION:



PFC model number 10CL16D5G-3G-CD-SFF is a Combine Bandpass filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: 16500 MHz
- 1dB BANDWIDTH: 15000 TO 18000 MHz
- VSWR IN THE PASS BAND: 2.0:1 MAX.
- INSERTION LOSS (PASSBAND): < 1 dB MAX.
- REJECTION @ 14000 MHz: -60 dB
- REJECTION @ 15000 MHz: -60 dB
- REJECTION FROM 19000 TO 32000 MHz: -60 dB

CONNECTORS: SMA FEMALE CONNECTORS

- SIZE: 2.05" (L) x 0.625" (W) x 0.40" (H)
- WEIGHT: 1 OZ. TYP.

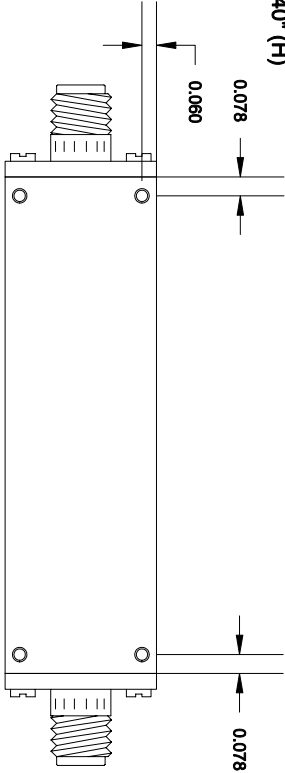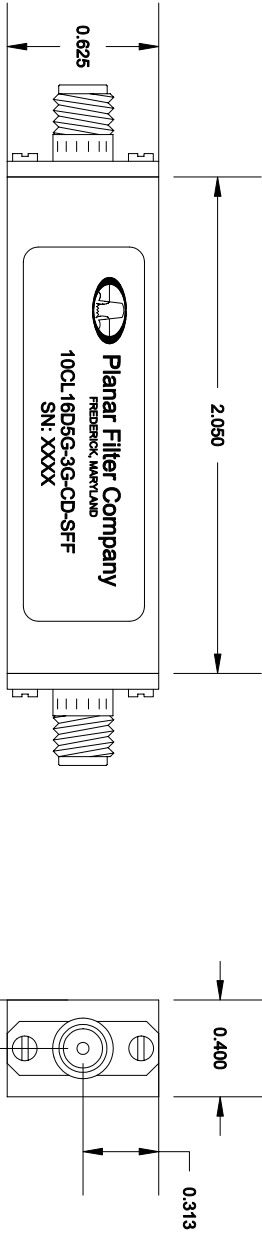

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	ORIGINAL RELEASE	8/21/01

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXX ±0.005

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PART NO. 155-0812		Planar Filter Company 7311G Grove Road, Fredrick, Maryland	
APPROVALS	DATE	TITLE OUTLINE DRAWING 10CL16D5G-3G-CD-SFF	
DRAWN S PALACIO	8/21/01	SIZE A	REV. —
CHECKED		FSCM NO. 1QJWO	DWG NO. 155-0812
ISSUED		SCALE N/A	SHEET 1 OF 1