


DESCRIPTION:


PFC model number 11BP750-500-3A-SFF is a LC Bandpass filter with SMA Connectors.
connectors in and out.

SPECIFICATIONS:

- CENTER FREQUENCY: 750MHz
- 2dB BANDWIDTH: 500-1000MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND): -0.5 dB
- REJECTION @ 470-1030 MHz: -50dB

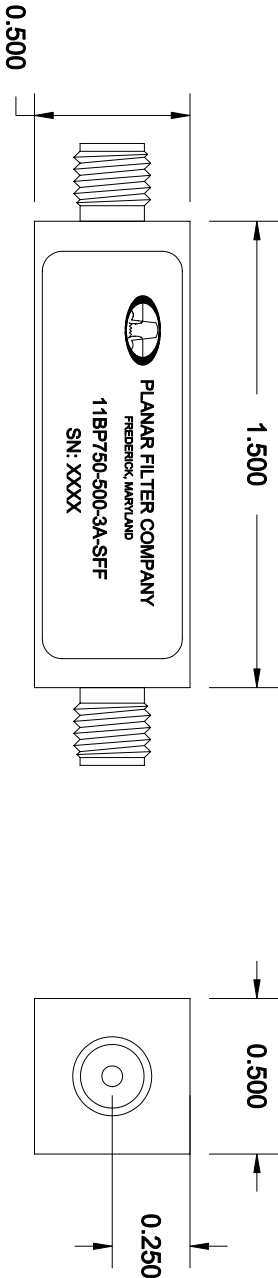

- CONNECTORS: SMA FEMALE CONNECTORS
- SIZE: 1.50" (L) x 0.50" (W) x 0.50" (H)
- WEIGHT: 1 OZ. TYP.

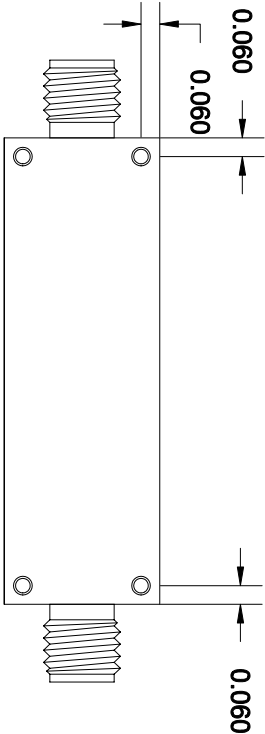

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	ORIGINAL RELEASE	8/16/02

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXXX ±0.005

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PART NO. 155-1565		Planar Filter Company 7311G Grove Road, Fredrick, Maryland	
APPROVALS	DATE	TITLE OUTLINE DRAWING 11BP750-500-3A-SFF	
DRAWN K.PAU	8/16/02	SIZE A	REV. —
CHECKED		FSCM NO. 1QJW0	DWG NO. 155-1565
ISSUED		SCALE N/A	SHEET 1 OF 1