

DESCRIPTION:



PMI MODEL NUMBER DTA-18G40G-60-CD-1-OPT32G37G IS A 11 BIT PROGRAMMABLE 60 dB ATTENUATOR WITH STEP RESOLUTION AS LOW AS 0.05 dB OVER THE FREQUENCY RANGE OF 18 GHz TO 40 GHz. THIS MODEL IS OFFERED IN THE SLIM LINE HOUSING MEASURING ONLY 0.5" IN HEIGHT WITH 2.92mm FEMALE CONNECTORS.

SPECIFICATIONS:

- FREQUENCY: 32.0 GHz TO 37.0 GHz
- MEAN ATTENUATION RANGE: 60 dB
- INSERTION LOSS: 11 dB TYP
- VSWR: 2.5:1 MAX
- FLATNESS: ± 3.0 dB TYP
- ACCURACY OF ATTENUATION: ± 3.0 dB TYP
- POWER HANDLING CAPABILITY: +24 dBm CW MAX
- INPUT 1dB COMPRESSION: +10 dBm TYP
- SWITCHING TIME:
 - ON TIME 1.0 μ s MAX
 - OFF TIME 0.5 μ s MAX
- POWER SUPPLY: 15V @ 100mA MAX
- CONNECTORS: (2) 2.92mm(F) & 15 PIN Micro-D-Female
Shipped with mating Micro-D Male
- WEIGHT: 3.0 oz (85 gm) Approximate
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750,
TYPE I OVER EPOXY POLIMIDE PRIMER
IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.
- LOGIC INPUT:
 - LOGIC "0" (BIT OFF) -0.3 to +0.8V
 - LOGIC "1" (BIT ON) +2.0 to +5.0V

PIN NO:	J3 PIN FUNCTIONS
1	3.125 dB
2	1.56 dB
3	0.78 dB
4	0.39 dB
5	GND
6	0.20 dB
7	0.10 dB
8	GND
9	0.05 dB (LSB)
10	Not Used
11	+12VDC
12	50 dB (MSB)
13	25 dB
14	12.5 dB
15	6.25 dB

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	—	PRELIMINARY	8/5/15	

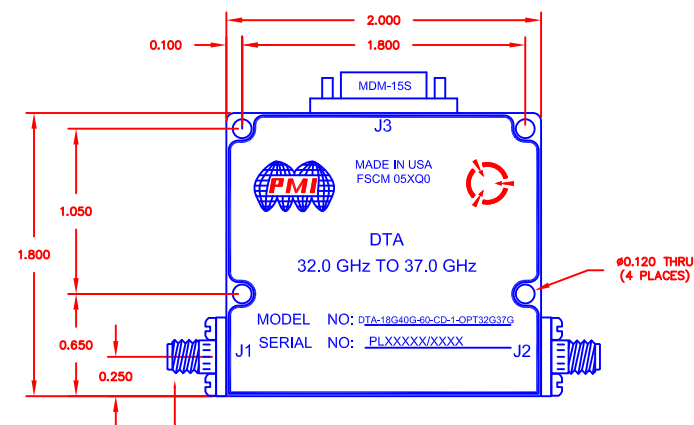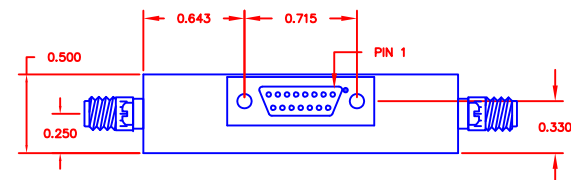

2.92mm Female Connectors
(2 Places)

PMI CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -40°C TO +85°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		8/5/15		PRODUCT FEATURE	
CHECKED				DTA-18G40G-60-CD-1-OPT32G37G	
ISSUED				PRELIMINARY	
SIZE		FSCM NO.		DWG NO.	
A		05XQ0			
SCALE		N:S		SHEET	
				1 OF 1	