

DESCRIPTION:



PMI MODEL NUMBER DTA-26R5G40G-30-CD-1-OPT32G37G IS A 10 BIT PROGRAMMABLE 30 dB PIN DIODE ATTENUATOR WITH STEP RESOLUTION AS LOW AS 0.03 dB OVER THE FREQUENCY RANGE OF 32.0 GHz TO 37.0 GHz.

SPECIFICATIONS:

- FREQUENCY: 32.0 GHz TO 37.0 GHz
- INSERTION LOSS: 6.0 dB TYP
- ATTENUATION RANGE: 30 dB TYP
- ACCURACY OF ATTENUATION: ±2.0 dB TYP
- VSWR: 2.5:1 MAX
- INPUT POWER: +24 dBm CW MAX
- INPUT 1dB COMPRESSION POINT: +10dBm TYP
- ATTENUATION CONTROL: 10-BIT DIGITAL TTL
- LSB: 0.03dB
- DC SUPPLY: +12VDC or +15VDC
- SIZE: 2.00" (L) X 1.80" (W) X 0.50" (H)
- PWR/CTL CONNECTORS: 15 PIN Micro-D-Female (MATING CONNECTOR SUPPLIED)
- RF CONNECTORS: 2.92 mm - Female
- FINISH: PAINTED GRAY
- LOGIC INPUT
 - LOGIC "0" (BIT OFF) -0.3 to +0.8V
 - LOGIC "1" (BIT ON) +2.0 to +5.0V

PIN NO:	J3 PIN FUNCTIONS
1	1dB
2	0.5dB
3	0.25dB
4	0.125dB
5	GND
6	0.0625dB
7	0.03125dB (LSB)
8	GND
9	Not Used
10	Not Used
11	+12VDC
12	16dB (MSB)
13	8dB
14	4dB
15	2dB

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A1	ORIGINAL RELEASE	2/11/11
			APPROVED
			PK

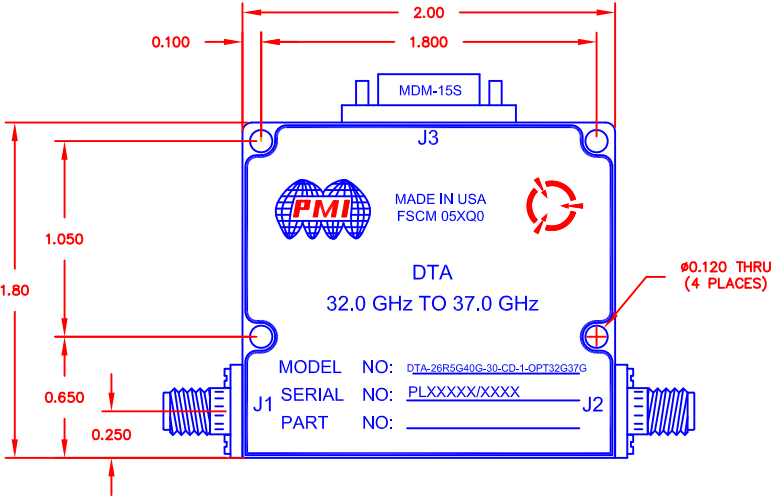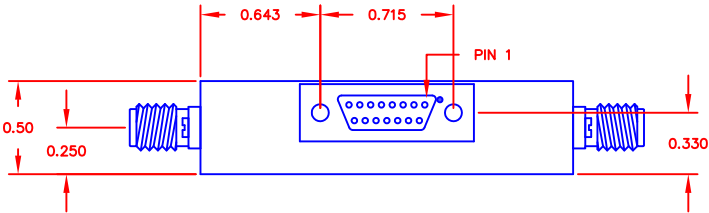

PMI CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -50°C TO +100°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED

APPROVALS		DATE		TITLE			
DRAWN		NJ A		PRODUCT FEATURE			
CHECKED				DTA-26R5G40G-30-CD-1-OPT32G37G			
ISSUED				SIZE	FSCM NO.	DWG NO.	REV.
				A	05XQ0	27035640	A1
				SCALE	N:S	SHEET	1 OF 1