

FEATURES

- High Output Power: P_{1dB} = 42.5dBm (Typ.)
- High Gain: G_{1dB} = 13.0dB (Typ.)@1.8GHz (FLL200IB-1)
- High PAE: η_{add} = 34% (Typ.)
- Proven Reliability
- Hermetically Sealed Package

DESCRIPTION

The FLL200IB-1, FLL200IB-2, FLL200IB-3 are Power GaAs FETs that are specifically designed to provide high power at L-Band frequencies with gain, linearity and efficiency superior to that of silicon devices.

The performance in multitone environments for Class AB operation make them ideally suited for base station applications.

SUMITOMO stringent Quality Assurance Program assures the highest reliability and consistent performance.



ABSOLUTE MAXIMUM RATING (Ambient Temperature Ta=25deg.C)

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V _{DS}		15	V
Gate-Source Voltage	V _{GS}		-5	V
Total Power Dissipation	P _T	T _c = 25deg.C	83.3	W
Storage Temperature	T _{stg}		-65 to +175	deg.C
Channel Temperature	T _{ch}		175	deg.C

SUMITOMO recommends the follow ing conditions for the reliable operation of GaAs FETs:


1. The drain-source operating voltage (V_{DS}) should not exceed 10 volts.
2. The forward and reverse gate currents should not exceed 53.6 and -11.6 mA respectively with gate resistance of 25ohm.
3. The operating channel temperature (T_{ch}) should not exceed 145deg.C.

ELECTRICAL CHARACTERISTICS (Ambient Temperature Ta=25deg.C)


Item		Symbol	Test Conditions		Limit			Unit
					Min.	Typ.	Max.	
Saturated Drain Current		I _{DSS}	V _{DS} =5V, V _{GS} =0V		-	8	12	A
Transconductance		g _m	V _{DS} =5V, I _{DS} =4800mA		-	4000	-	mS
Pinch-off Voltage		V _p	V _{DS} =5V, I _{DS} =480mA		-1.0	-2.0	-3.5	V
Gate Source Breakdown Voltage		V _{GSO}	I _{GS} =-480uA		-5	-	-	V
Output Power at 1dB G.C.P.	FLL200IB-1	P _{1dB}	V _{DS} =10V, I _{DS} =0.6 I _{DSS} (Typ.)	f=1.5GHz	41.5	42.5	-	dBm
	f=2.3GHz							
	f=2.6GHz							
Power Gain at 1dB G.C.P.	FLL200IB-1	G _{1dB}		f=1.5GHz	12.0	13.0	-	dB
	FLL200IB-2			f=2.3GHz	10.0	11.0		
	FLL200IB-3			f=2.6GHz	10.0	11.0		
Drain Current		I _{dsr}	V _{DS} = 10V		-	4.8	6	A
Power-added Efficiency		η _{add}	I _{DS} = 0.6 I _{DSS} (Typ.)		-	34	-	%
Thermal Resistance		R _{th}	Channel to Case		-	1.6	1.8	deg.C/W
Channel Temperature Rise		ΔT _{ch}	10V x I _{dsr} x R _{th}		-	-	80	deg.C

G.C.P.: Gain Compression Point

CASE STYLE	IB
CAP STYLE FLL200IB-1	CERAMIC
CAP STYLE FLL200IB-2, FLL200IB-3	METAL
RoHS Compliance	Yes




CERAMIC CAP




METAL CAP



POWER DERATING CURVE

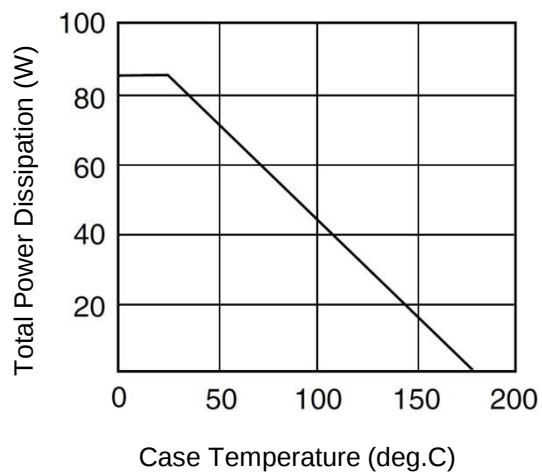

DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

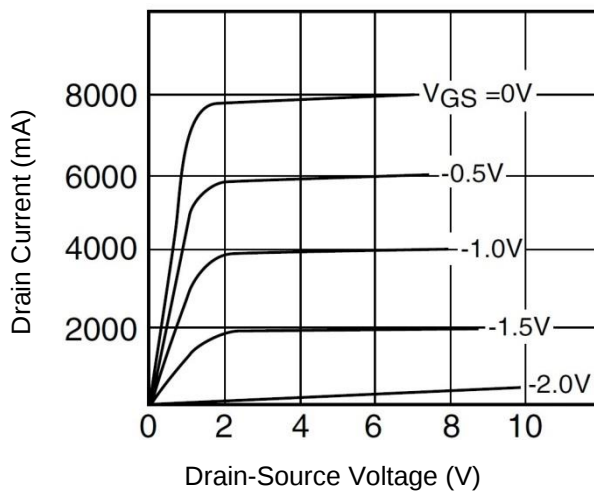

FLL200IB-1

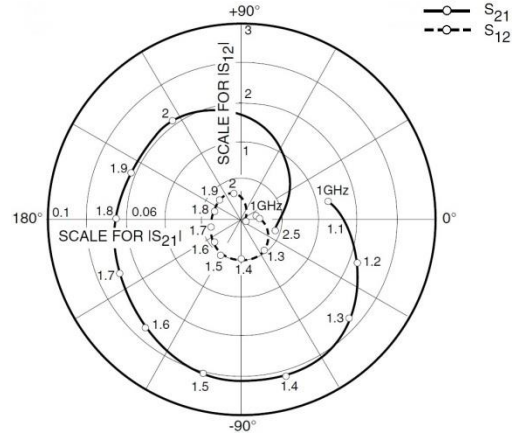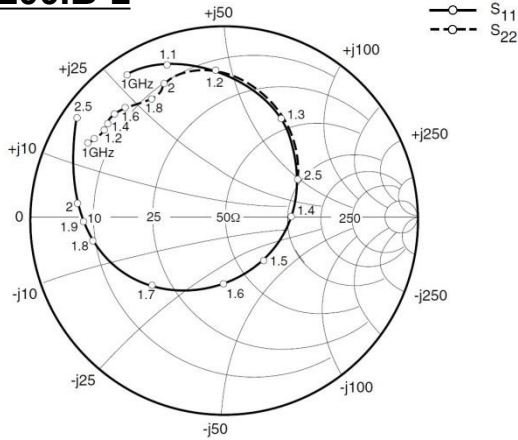


S-PARAMETERS



VDS = 10V, IDS = 4800mA

FREQUENCY (MHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1000	0.888	124.3	1.517	13.5	0.009	-5.0	0.819	150.3
1100	0.841	110.9	1.761	-0.2	0.012	-17.3	0.796	147.5
1200	0.754	91.4	2.113	-18.0	0.015	-33.3	0.786	145.9
1300	0.584	60.4	2.559	-42.4	0.019	-56.8	0.790	142.7
1400	0.353	1.2	2.876	-73.3	0.022	-86.9	0.790	140.7
1500	0.341	-87.7	2.754	-105.9	0.021	-119.8	0.800	136.5
1600	0.490	-133.3	2.443	-132.5	0.019	-147.5	0.787	131.6
1700	0.609	-156.4	2.215	-156.1	0.017	-172.2	0.764	127.5
1800	0.680	-170.8	2.096	-179.2	0.016	162.7	0.732	123.4
1900	0.719	179.5	2.034	155.9	0.015	135.4	0.716	121.2
2000	0.753	173.8	1.953	126.8	0.015	103.5	0.729	116.4
2500	0.942	145.3	0.563	-15.5	0.006	-39.0	0.451	32.7

DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

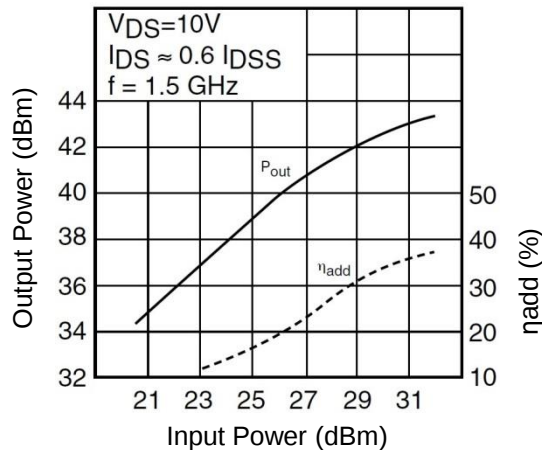

FLL200IB-2

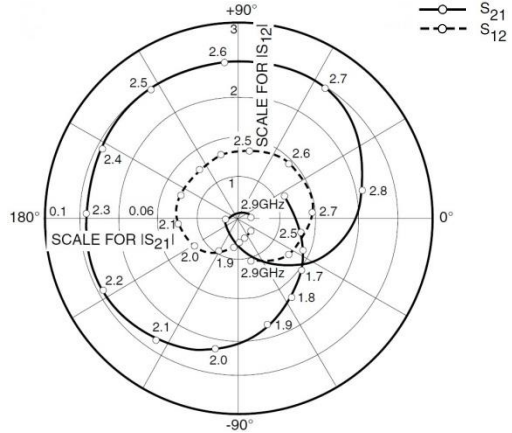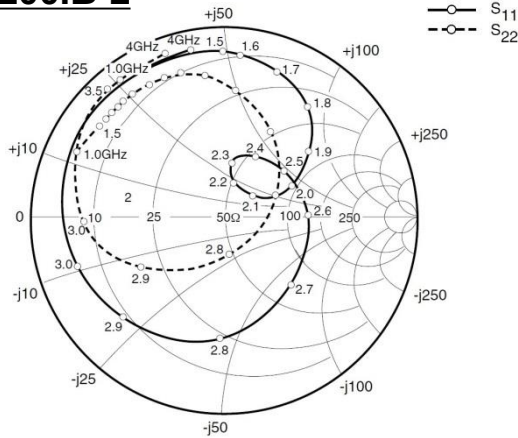


S-PARAMETERS



V_{DS} = 10V, I_{DS} = 4800mA

FREQUENCY (MHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
500	0.944	157.3	1.164	60.9	0.004	-0.8	0.906	166.1
1000	0.937	127.4	0.835	28.8	0.006	-16.3	0.855	153.8
1500	0.880	90.3	1.090	-14.0	0.010	-55.4	0.826	141.4
1700	0.791	68.9	1.421	-39.7	0.014	-81.9	0.810	135.6
2000	0.379	27.8	2.283	-100.2	0.025	-147.2	0.814	125.6
2300	0.309	82.4	2.569	179.4	0.031	128.7	0.789	104.9
2500	0.408	41.8	2.632	128.5	0.035	78.5	0.651	83.8
2700	0.480	-43.5	2.631	55.1	0.039	6.2	0.290	26.4
3000	0.803	-158.4	0.772	-68.4	0.012	-111.1	0.718	-177.7
3500	0.915	135.8	0.030	-151.4	0.001	72.1	0.937	131.5
4000	0.926	102.3	0.013	-8.2	0.002	8.3	0.947	109.9

DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

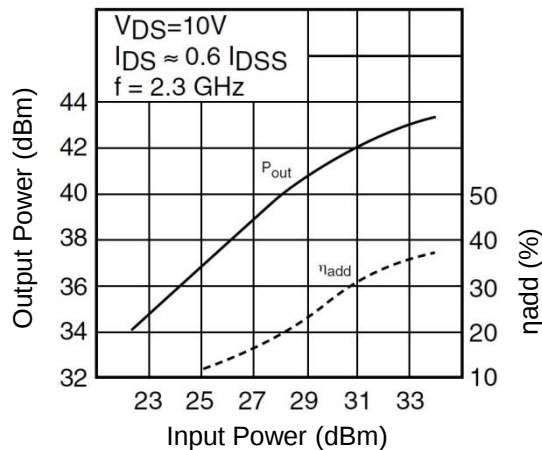

FLL200IB-3

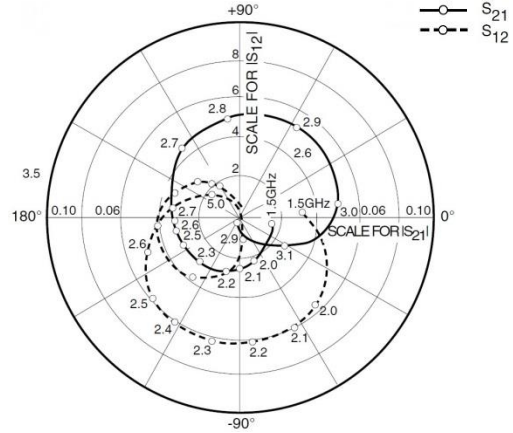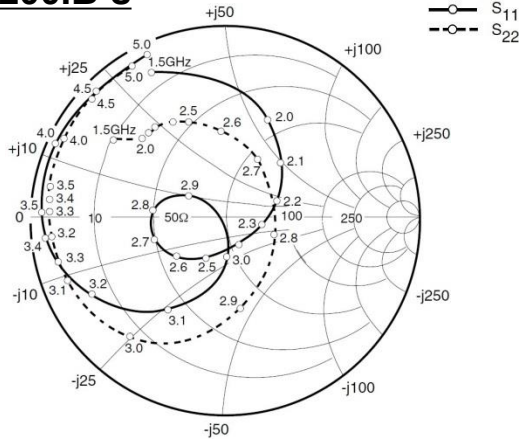


S-PARAMETERS


VDS = 10V, IDS = 4800mA

FREQUENCY (MHZ)	S11 MAG	S11 ANG	S21 MAG	S21 ANG	S12 MAG	S12 ANG	S22 MAG	S22 ANG
500	0.962	166.6	1.649	63.2	0.007	41.9	0.837	168.9
1000	0.933	144.9	1.143	30.0	0.015	32.2	0.798	156.2
1500	0.864	115.5	1.368	-12.1	0.031	2.8	0.726	142.6
2000	0.548	64.6	2.320	-75.5	0.059	-50.7	0.526	137.3
2500	0.220	-111.2	3.742	-173.7	0.051	-138.8	0.560	107.0
3000	0.214	-85.0	4.634	7.9	0.039	-126.8	0.782	-128.3
3500	0.923	178.6	0.375	-118.7	0.017	117.2	0.898	166.5
4000	0.953	150.4	0.065	-162.9	0.005	84.4	0.939	147.5
4500	0.952	131.2	0.020	168.3	0.001	75.2	0.951	133.4
5000	0.953	113.9	0.008	143.6	0.001	63.7	0.957	119.1

DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

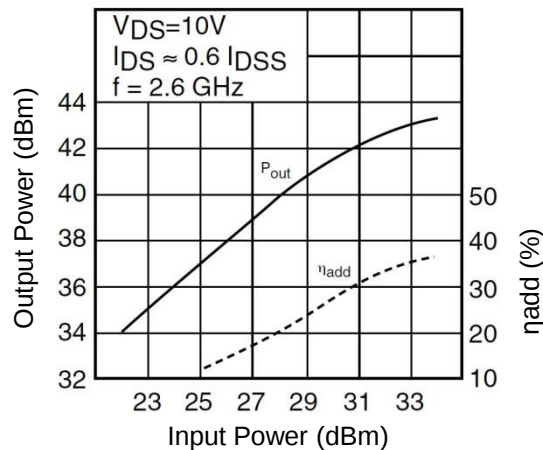

Case Style "IB" Metal-Ceramic Hermetic Package

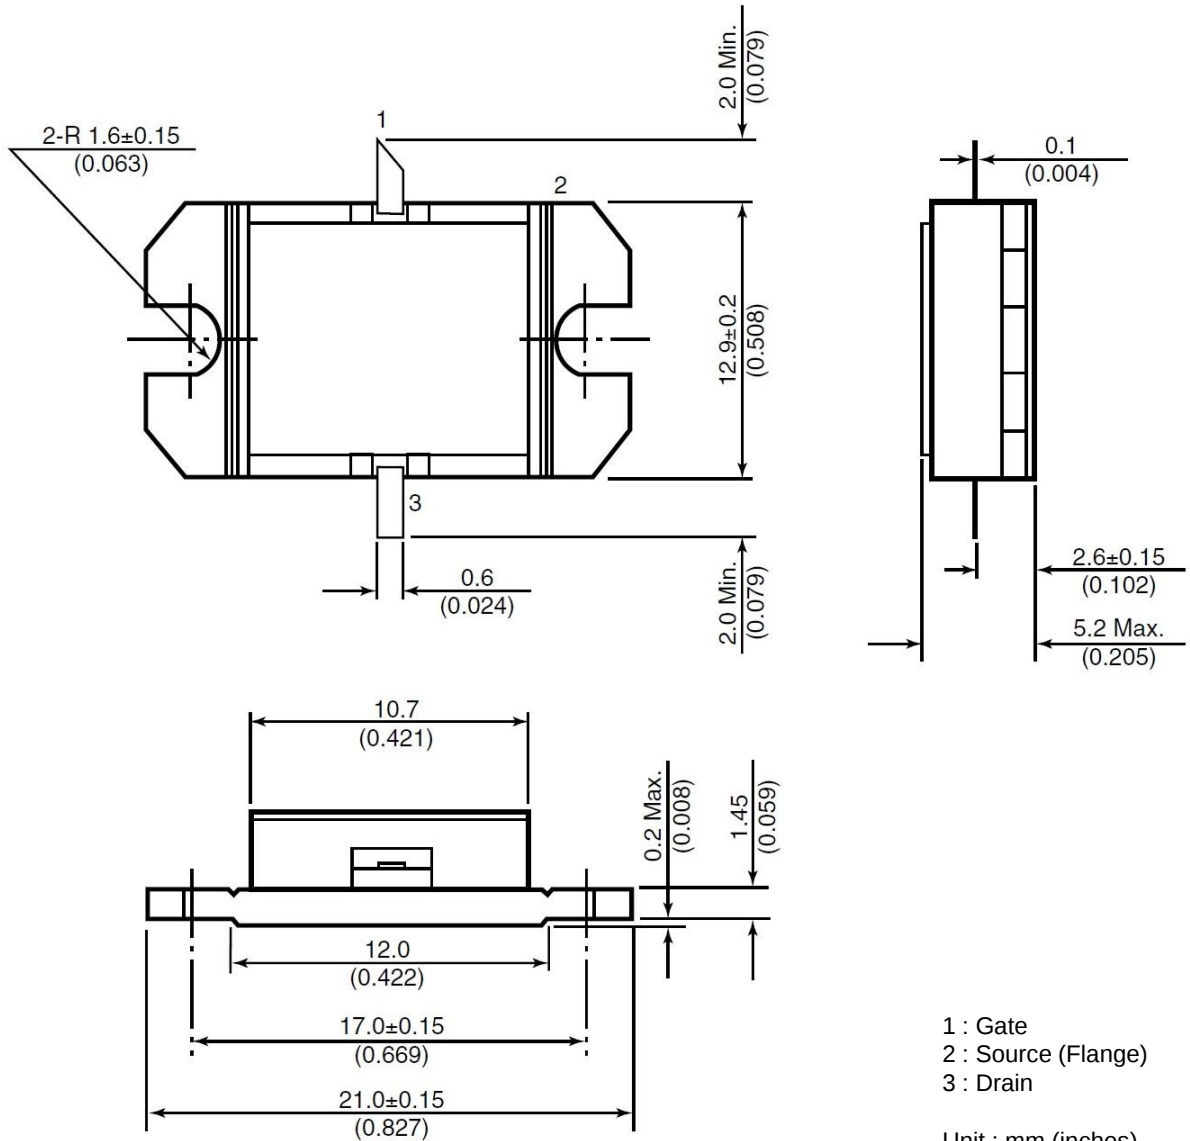



FLL200IB-1, FLL200IB-2, FLL200IB-3

L-Band Medium & High Power GaAs FET

For further information please contact:

<http://global-sei.com/Electro-optic/about/office.html>

CAUTION

This product contains **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.