


MEQ6-26CSP1

Chip Scale Package MMIC 26 GHz Equalizer

DEVICE OVERVIEW

General Description

The MEQ6-26CSP1 is a passive surface mount GaAs MMIC equalizer in a chip scale package (CSP). This equalizer is ideal for compensating for low pass filtering effects in RF/microwave and high-speed digital systems. The MEQ6-26CSP1 provides positive slope from DC to 26GHz with a DC attenuation of 6dB. The CSP allows for extreme miniaturization of the SMT footprint while providing die-like performance. GaAs MMIC technology provides consistent unit-to-unit performance in a small, low-cost form factor.



[Download s-parameters here](#)

Features

- Small 1.5 x 1.5 mm package size
- 2W Power Handling
- DC attenuation of 6dB
- Typical Insertion Loss 0.3 dB at 26GHz
- VSWR < 1.5 Over Operating Band
- Low SWaP
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

Applications

- RF Transceivers
- High-Speed Data
- Telecom
- Cable Loss Compensation
- Amplifier Compensation

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MEQ6-26CSP1	Chip Scale Package MMIC 26 GHz Equalizer	CSP1	REACH RoHS	Released	EAR99
EVB-MEQ6-26	Evaluation Board, Chip Scale Package MMIC 26 GHz Equalizer	EVB	REACH RoHS	Released	EAR99

Table Of Contents




■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Typical Performance Plots
■ Port Configuration and Functions	■ Mechanical Data
Port Functions	Outline Drawing
■ Revision History	■ Footprint Image
	■ Evaluation Board
	Evaluation Board Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2022-04-01	Datasheet Initial Release
A	2023-02-01	Package Description Updated

Port Configuration and Functions

Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	
Pin 1	Input/Output	Pin 1 is DC connected to ground through a resistor. DC block is required if voltage present.	
Pin 2	Output/Input	Pin 2 is DC connected to ground through a resistor. DC block is required if voltage present.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port	2	W

Package Information

Parameter	Details	Rating
Weight	Package name: CSP1	0.04g
Dimensions	-	1.50 x 1.50 mm
Moisture Sensitivity Level	-	MSL 3

Electrical Specifications



The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the equalizer in a SM package with a sine wave input applied to port 1.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Impedance	-	0	26	-	50	-	Ω
Insertion Loss	-	26	26	-	0.3	-	dB
Insertion Loss at DC	-	0	0	-	6	-	dB
Return Loss	-	0	26	-	23	-	dB

Equalizer is symmetrical. Reverse measurement is equivalent to forward measurement. All measurements taken in eval and de-embedded to the CSP1 pad interface.

Typical Performance Plots


Electrical Performance Plots are de-embedded to the CSP package ports.

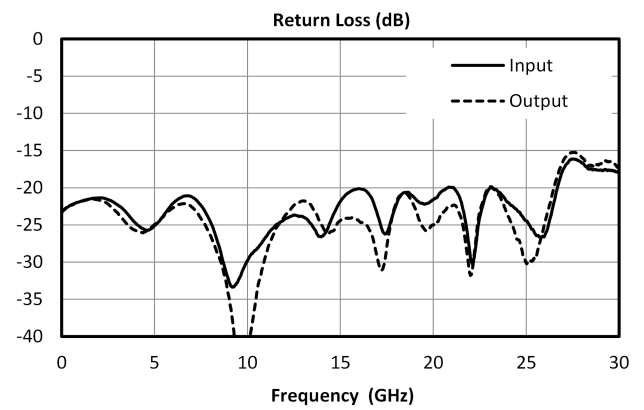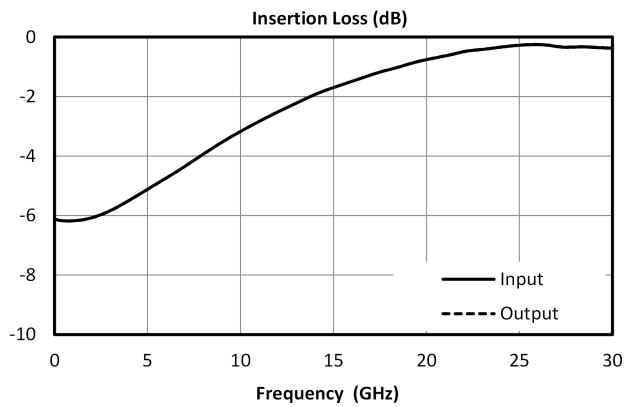

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

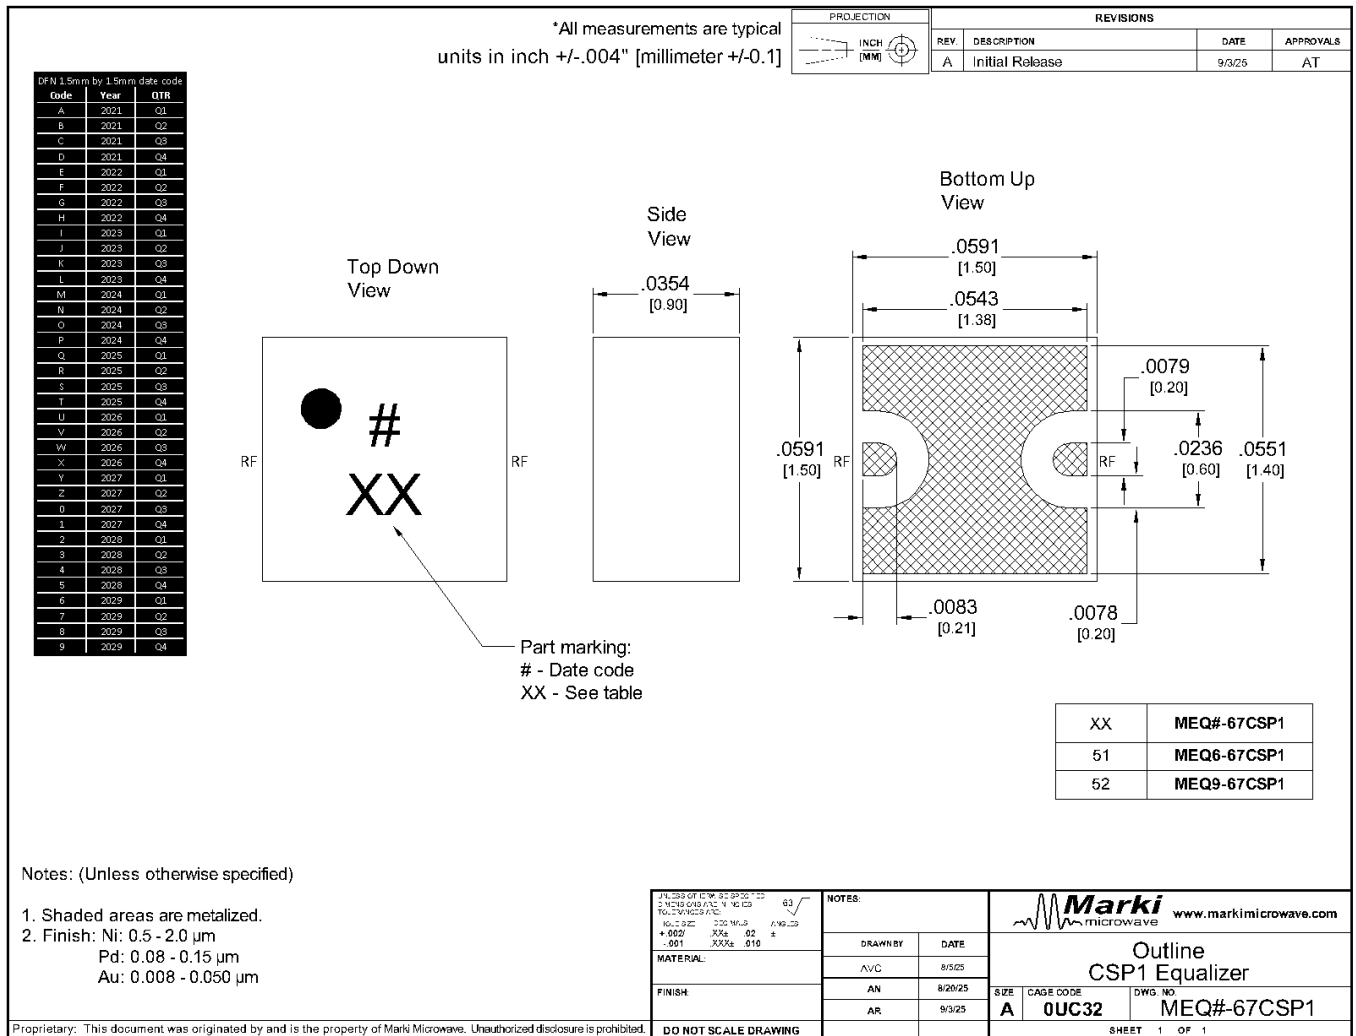


MEQ6-26CSP1



Chip Scale Package MMIC 26 GHz Equalizer

Footprint Image

Download : [Footprint Drawing](#)

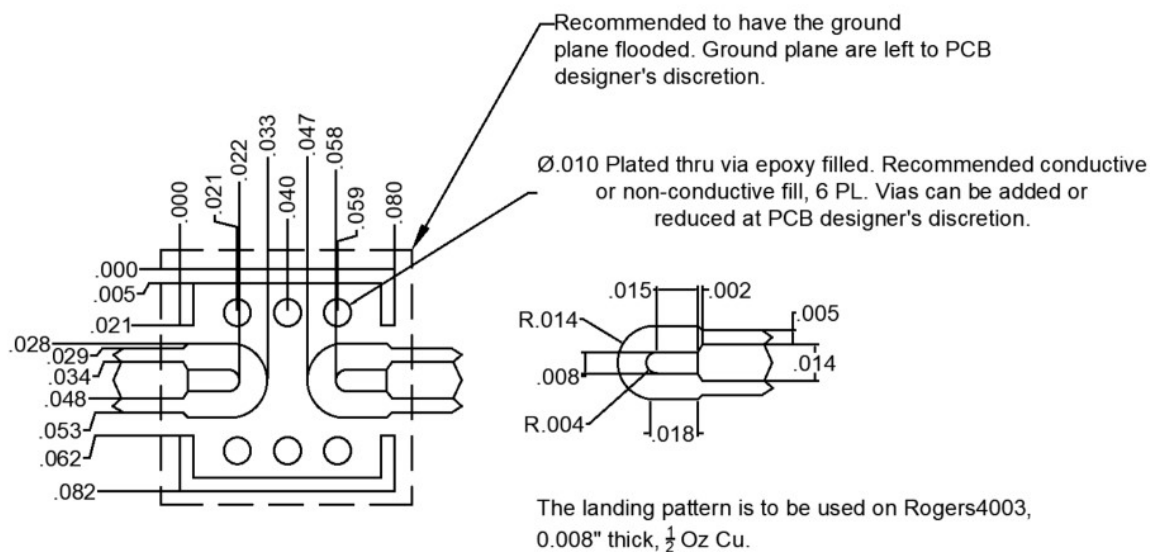

Evaluation Board - Outline Drawing

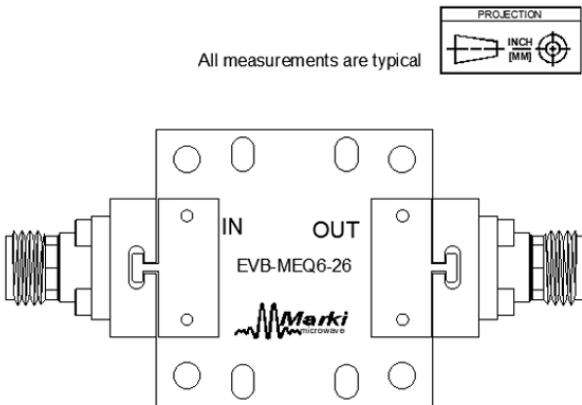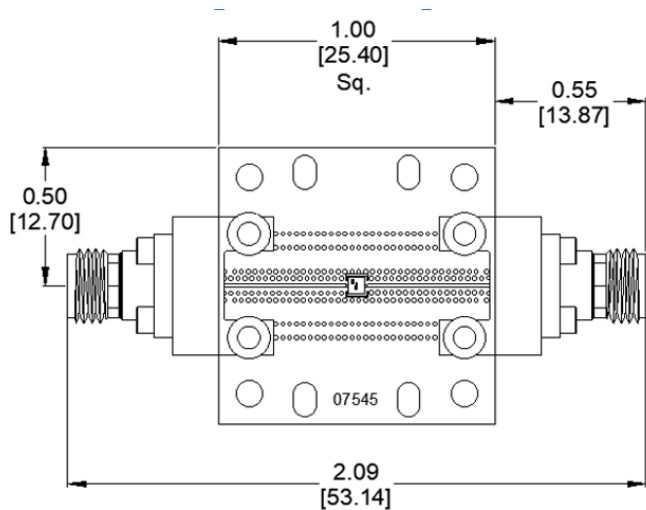

Port	Connector Type
In	2.92mm Female
Out	2.92mm Female
Note: Connectors are not removeable.	

Unless otherwise specified, dimensions are in inches. Tolerances are:

.XX	±.02
.XXX	±.005

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE, M wave logo, FastSwitch, and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2022 - 2023, Marki Microwave, LLC