


SPECIFICATION SHEET

JFW MODEL 50DB-060

DC BLOCK

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Description	Inner Only DC Block
Frequency Range	1 KHz-2 GHz
Impedance	50 Ohms nominal
VSWR	1.3:1 maximum
Insertion Loss	0.3 dB maximum
DC Breakdown Voltage	50 Volts
RF Input Power	2 Watts average
RF Connector	N, BNC, SMA or TNC
Outline Drawing Numbers	092-3134 (Connector Chart) 092-2189 (N M to N F) 092-4276 (SMA M to SMA F)

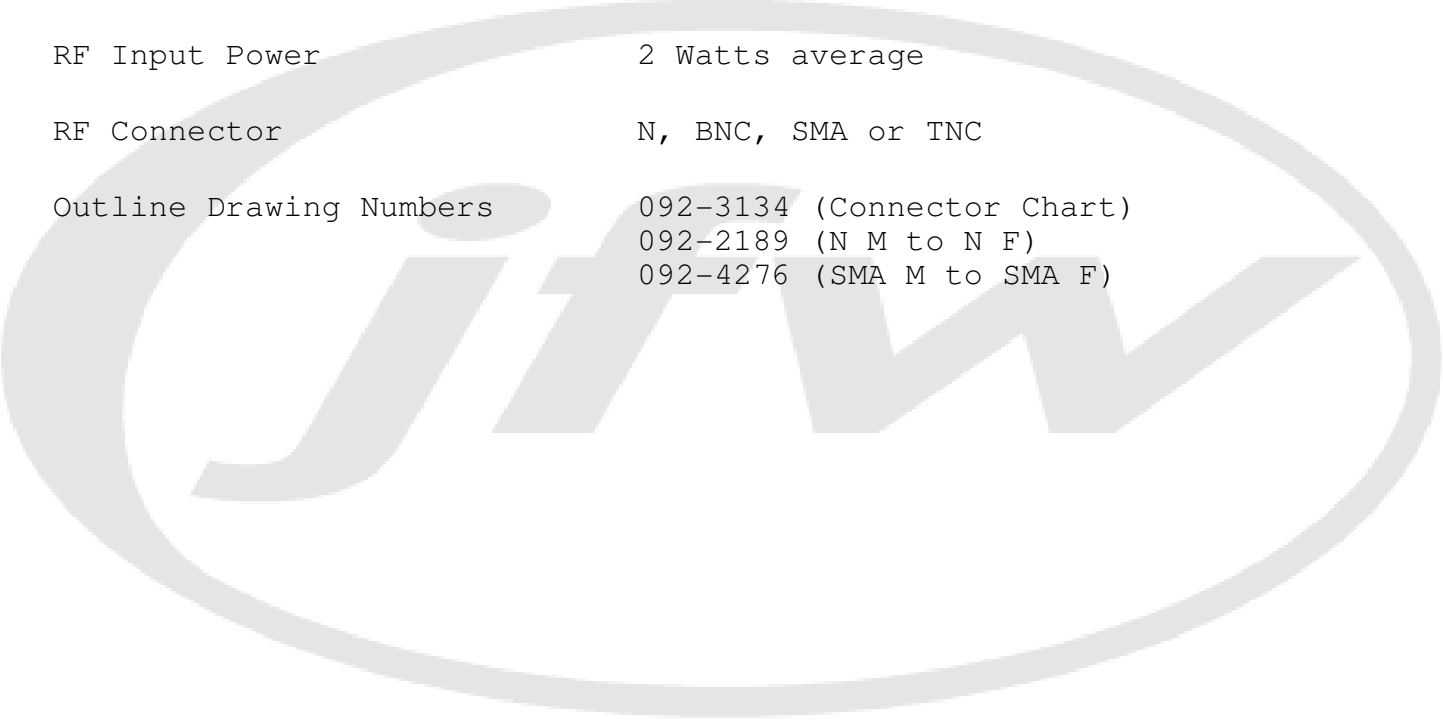

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	08/26/2010		BAC 08/26/2010	27494	01/23/2017	C	TRS 01/23/2017
26700	06/08/2016	A	CLK 06/08/2016				
26756	06/20/2016	B	TRS 06/20/2016				