



### Absorptive Voltage Control Attenuator 0.01 - 40GHz



#### Features

- Ultra Wide Band Operation 0.01-40GHz
- Wide Attenuation Range 17dB
- Absorptive Topology
- Double Negative Control Operation
- Customization available upon request

#### Typical Applications

- Wireless Infrastructure
- Test and Measurement
- Military and Aerospace

#### Electrical Specifications, TA = +25 °C

Description	PN:RFVAT0040A17									
	Absorptive Voltage Attenuator									
Parameters	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	0.01 ~ 18			18~ 27			27~40			GHz
Attenuation Range		17			18			17		dB
Insertion Loss		2	2.3		3	3.5		3.2	3.5	dB
Insertion Loss Temperature Coefficient		0.01			0.01			0.01		dB/°C
Input VSWR		1.6	2		2	2.5		3	3.5	:1
Output VSWR		1.6	2		1.6	2		1.6	2	:1
0.1dB Compression Point (Po.1dB)		24			24			23		dBm
Input Ip3		33			33			32		dBm
Control Voltage		-1	0.5		-1	0.5		-1	0.5	V
Weight	0.39									ounces
Impedance	50									Ω
Current Consumption	30									mA
Input / Output Connectors	2.92mm-Female									
Finish	Gold Plated									
Material	Aluminum									
Sealing	Hermetically Sealed (Optional)									

Absorptive Voltage Control Attenuator 0.01-40GHz



**Absolute Maximum Ratings**

Control Voltage	-3V ~ +0.5V
RF Input power	+24dBm

**Ordering Information**

Part No.	ECCN	Description
RFVAT0040A17	EAR99	0.01-40GHz Voltage Control Attenuator

**Environmental Specifications and Test Standards**


Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude		Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883	MIL-STD-883 (For Hermetically Sealed Units)

**Absorptive Voltage Control Attenuator 0.01-40GHz**




### Typical Performance Plots


#### Insertion Loss@+25°C

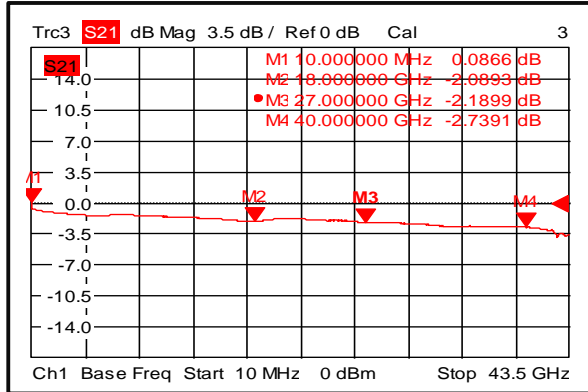


#### Input VSWR @+25°C

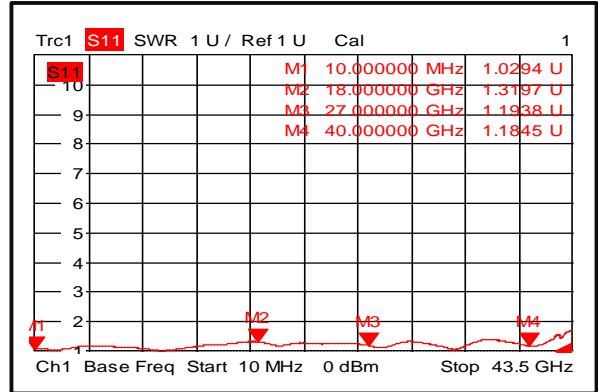


#### Output VSWR @+25°C

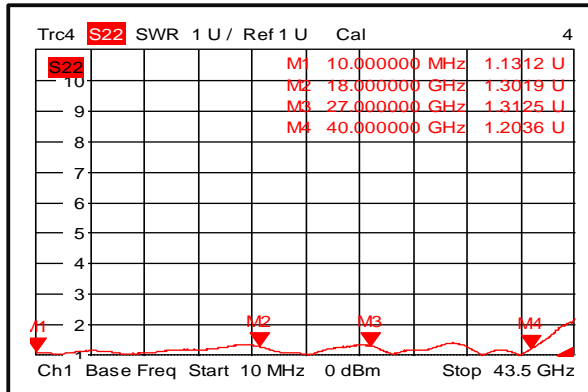


#### Insertion Loss @-45°C

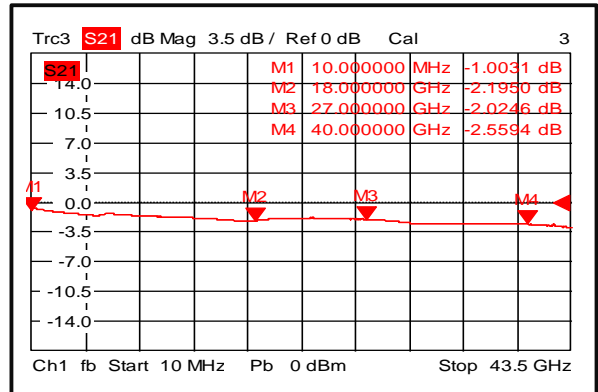


#### Input VSWR @-45°C

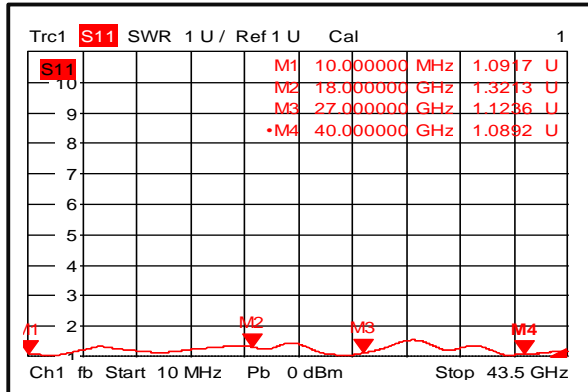


#### Output VSWR @-45°C

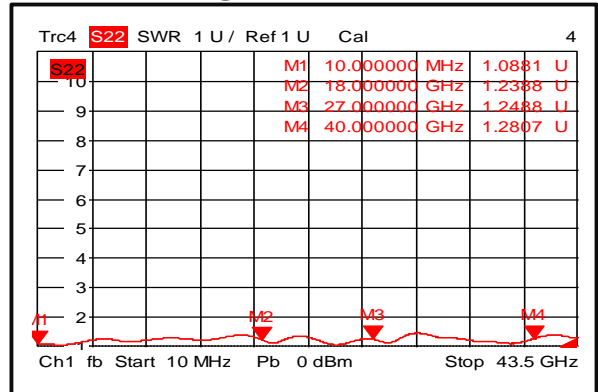

#### Insertion Loss@+85°C

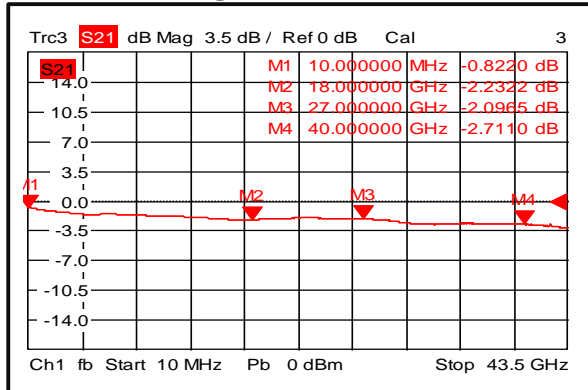


#### Input VSWR @+85°C

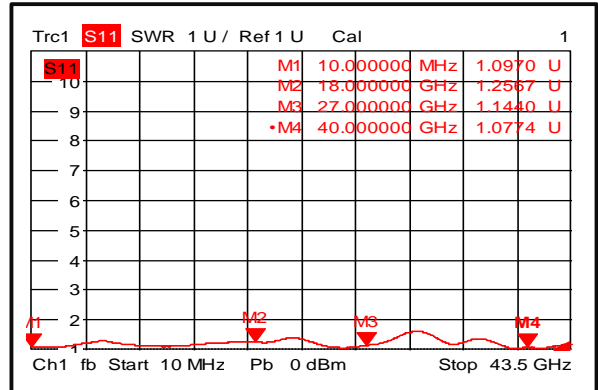


Absorptive Voltage Control Attenuator 0.01-40GHz




**Output VSWR @+85°C**

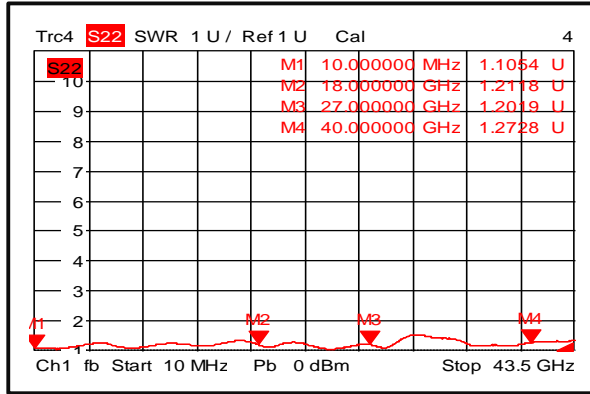


**Attenuation vs. Frequency**

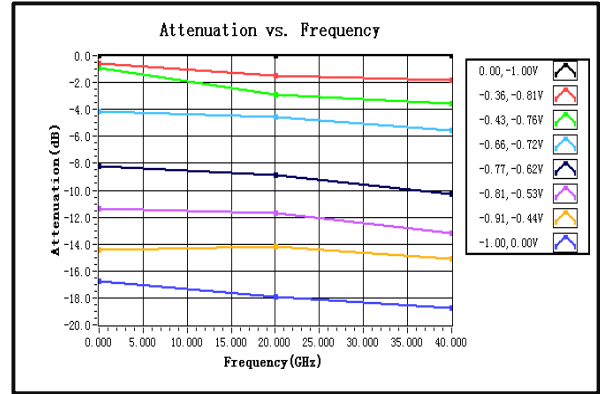


**Input VSWR vs. Voltage**

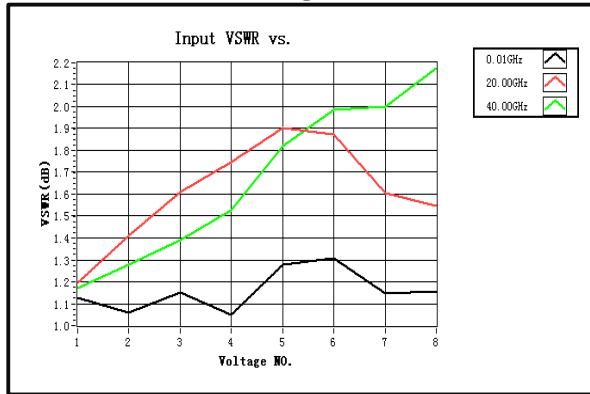

**Output VSWR vs. Voltage**

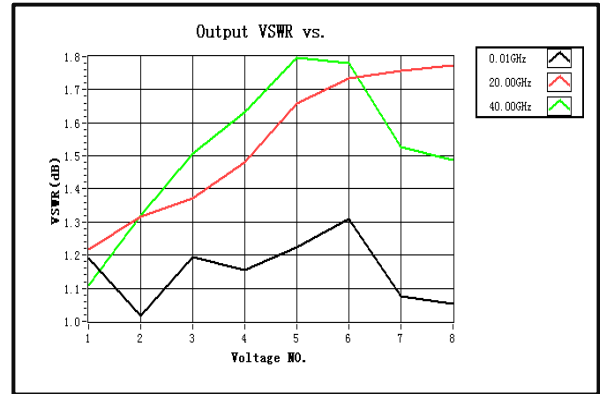

**Phase Shift vs. Frequency**

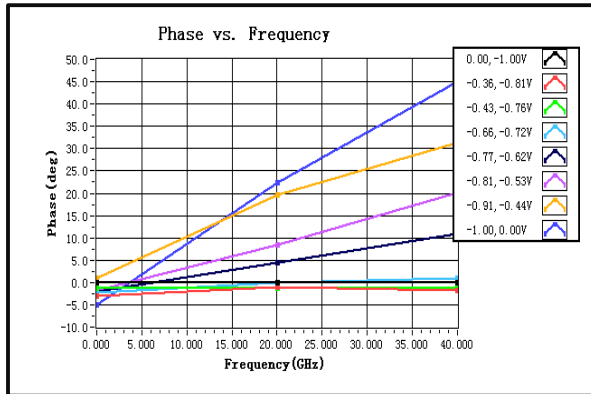


**Absorptive Voltage Control Attenuator 0.01-40GHz**



### Outline Drawing:

All Dimensions in mm [inches]

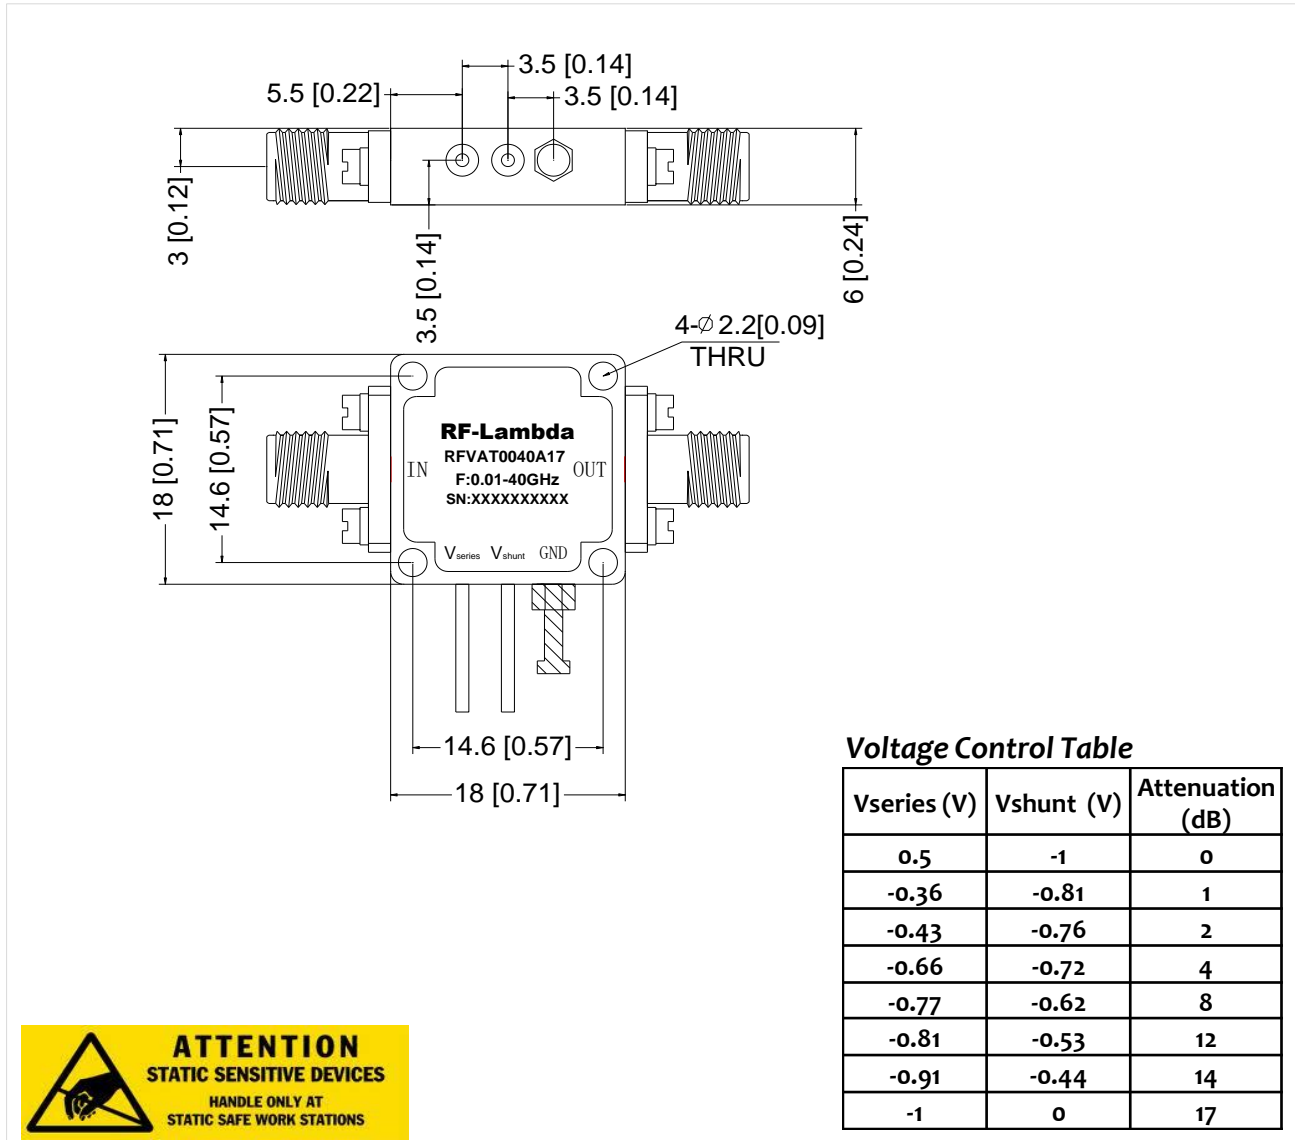

Voltage Control Table

Vseries (V)	Vshunt (V)	Attenuation (dB)
0.5	-1	0
-0.36	-0.81	1
-0.43	-0.76	2
-0.66	-0.72	4
-0.77	-0.62	8
-0.81	-0.53	12
-0.91	-0.44	14
-1	0	17

### Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.