

DESCRIPTION:



PFC model number 11CL19G-4G-CD-SFF is a Combine Bandpass filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: 19000 MHZ
- 1dB BANDWIDTH: 4000 MHZ
- VSWR IN THE PASS BAND: 2.0:1 MAX.
- INSERTION LOSS (PASSBAND): < 1 dB MAX.
- REJECTION @ 10000 MHZ: -50 dB
- REJECTION @ 15000 MHZ: -50 dB
- REJECTION @ 18500 to 29000 MHZ: -50 dB

CONNECTORS: SMA FEMALE CONNECTORS

- SIZE: 2.05" (L) x 0.625" (W) x 0.40" (H)
- WEIGHT: 1 OZ. TYP.

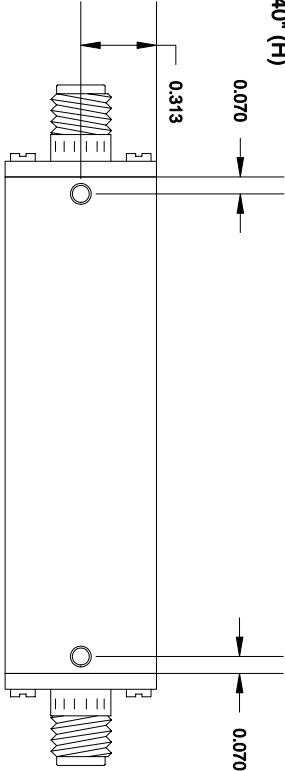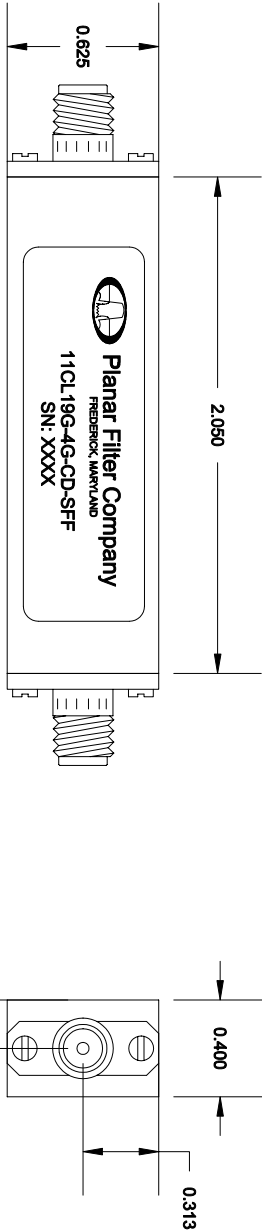

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	—	ORIGINAL RELEASE	9/4/01	

PART NO. 155-0884		 Planar Filter Company 7311G Grove Road, Frederick, Maryland	
APPROVALS		TITLE	
DRAWN S PALACIO	DATE 9/4/01	OUTLINE DRAWING 11CL19G-4G-CD-SFF	
CHECKED			
ISSUED			
SIZE A	FSCM NO. 1QJW0	DWG NO. 155-0882	REV. —
SCALE N/A		SHEET 1	OF 1