

DESCRIPTION:
PFC model number 3BP66D25-10-CD-SFF is a LC Bandpass filter with SMA connectors in and out.

SPECIFICATIONS:

- CENTER FREQUENCY: 66.25 MHz
- 3dB BANDWIDTH: 10 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND): 2.25 dB MAX.
- REJECTION: 3 Section Response


- CONNECTORS: SMA CONNECTORS IN/OUT
- SIZE: 2.00" (L) x 0.69" (W) x 0.38" (H)
- WEIGHT: 1 OZ. TYP.

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	ORIGINAL RELEASE	8/19/00
A		UPDATE	1/18/10

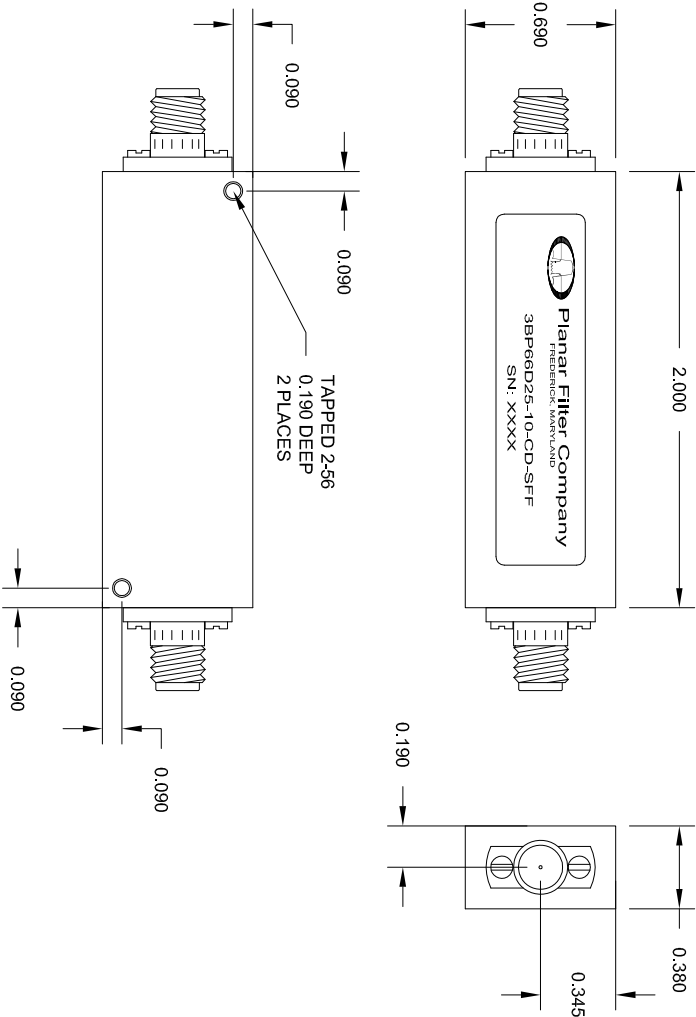

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXXX ±0.005

PART NO.		TITLE	
APPROVALS		DATE	
DRAWN S. PALACIO		8/19/00	
CHECKED			
ISSUED			
SIZE		FSQM NO.	DWG NO.
A		1QUW0	155-0394
SCALE		N/A	SHEET 1 OF 1